

50V~1000V

1.0A

Plated axial lead, Low reverse leakage, High forward surge current capability.











	θ								



									μ
									μ

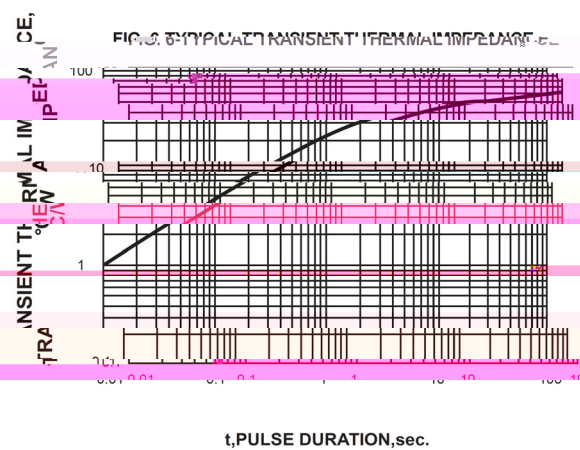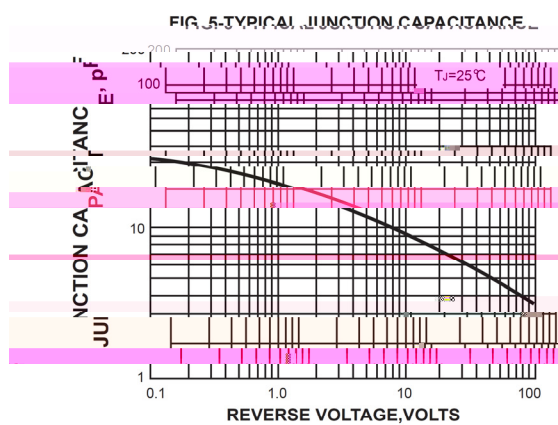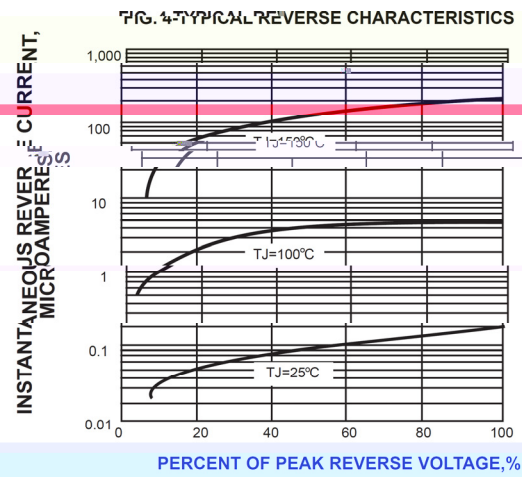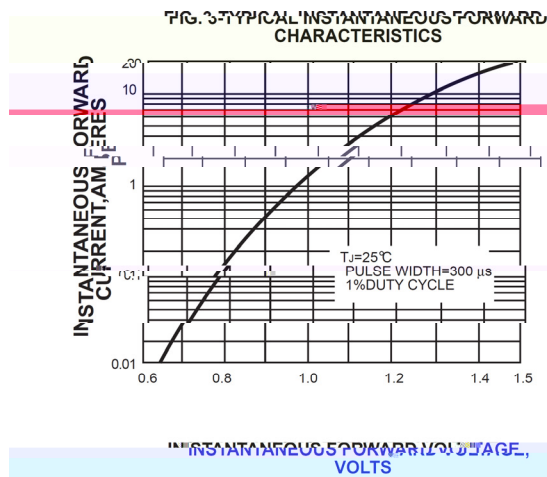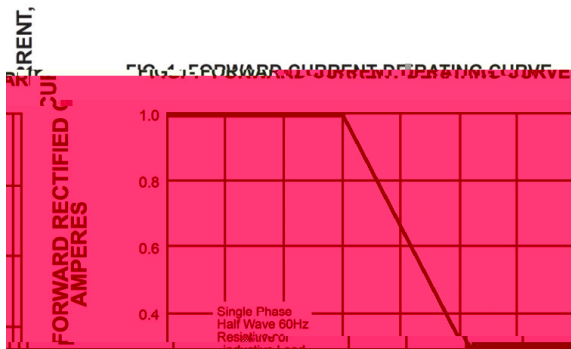

DO-41

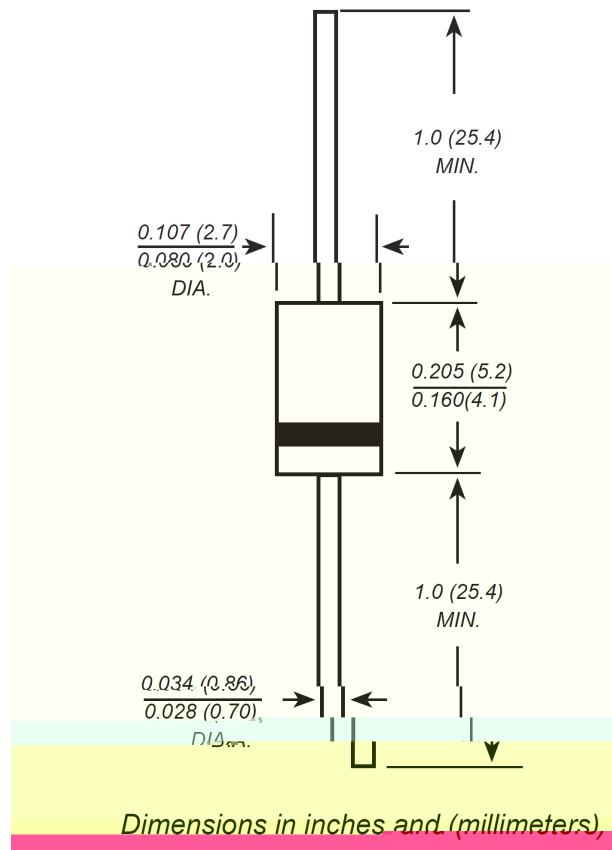


A circuit diagram showing a 1N4001 diode connected in series with a resistor. The diode is represented by a square symbol with the text "1N4001" inside. The resistor is represented by a rectangle symbol. The circuit is connected to a voltage source, indicated by a battery symbol on the left and a ground symbol on the right.

1N4001

[illegible]

Temperature Profile for IR Reflow Soldering(Pb-Free)

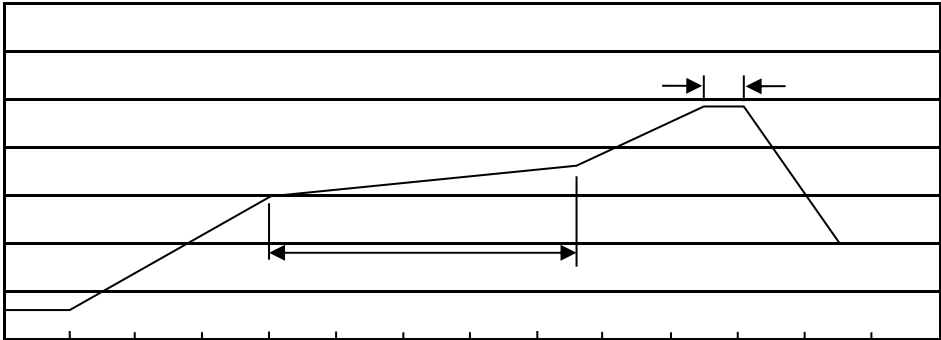

± ± ± ±

± ±

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱