

/ Descriptions

The BRCM24C02SC is 2Kbit I²C-compatible Serial EEPROM (Electrically Erasable Programmable Read-Only Memory) device in a SOP-8 Plastic Package. Halogen-free Product.

/ Features

Single Supply Voltage

Minimum operating voltage down to 1.7V 1 MHz clock from 2.5V to 5.5V 400kHz clock from 1.7V to 2.5V

Low power CMOS technology Read current 400uA, maximum Write current 1.6mA, maximum Schmitt Trigger, Filtered Inputs for Noise Suppression

Sequential & Random Read Features

8-byte Page Write Modes

Write protect of the whole memory array

Additional Write Lockable Page and 128-bit Serial Number

Self-timed Write Cycle (5ms maximum)



High Reliability Endurance: > 1 Million Write Cycles Data Retention: > 100 Years HBM: 6KV

Latch up Capability: +/-200mA;

/ Applications

Household appliances, Network communications, Portable Bluetooth devices, Set-top boxes, Smart meters, Fingerprint unlocking devices

/ Pinning

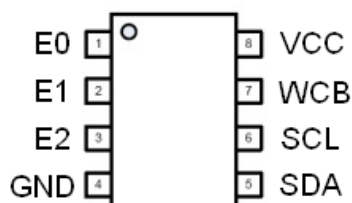

/ Pinning

/ Marking

/ See Marking Instructions

/ Absolute Maximum Ratings(Ta=25)

Parameter	Symbol	Rating	Unit
Storage Temperature	T _{stg}	-65~+150	
Operation Temperature	T _{opr}	-40~+85	
Maximum Operation Voltage	V _{cc}	6.25	V
Voltage on Any Pin with Respect to Ground	V _{pin}	-1.0~ V _{cc} +1.0	V
DC Output Current	I _{out}	5.0	mA
Electro-Static discharge HBM mode	ESD	6000	V

/ Reliability Characteristic

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Endurance	EDR	25 3.3V Page mode	1,000,000			Write cycles
Data retention	DRET		100			Years

/ DC Electrical Characteristics(Unless otherwise specified, Vcc = 1.7V to 5.5V,

T_A = 40 C to 85 C)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Supply Voltage	Vcc		1.7		5.5	V
Standby Current	Isb	Vcc = 3.3V, TA = 85 C			1.0	uA
		Vcc = 5.5V, TA = 85 C			3.0	uA
Supply Current	Icc1	Vcc=5.5V, Read at 400Khz		0.2	0.4	mA
Supply Current	Icc2	Vcc=5.5V, Write at 400Khz		0.8	1.6	mA
Input Leakage Current	ILI	VIN = Vcc or GND		0.1	1.0	uA
Output Leakage Current	ILO	VOOUT = Vcc or GND		0.05	1.0	uA
Input Low Level	VIL		-0.6		0.3Vcc	V
Input High Level	VIH		0.7Vcc		Vcc+0.5	V
Output Low Level Vcc = 1.7V (SDA)	VOL1	IOL = 1.5 mA			0.2	V
Output Low Level Vcc= 3.0V (SDA)	VOL2	IOL = 2.1 mA			0.4	V

/ AC Electrical Characteristics(Unless otherwise specified, Vcc = 1.7V to 5.5V,

T_A = 40 C to 85)

Parameter	Symbol	1.7V Vcc<2.5V			2.5V Vcc 5.5V			Unit
		Min	Typ	Max	Min	Typ	Max	
Clock Frequency, SCL	f _{SCL}	-	-	400	-	-	1000	kHz
Clock Pulse Width Low	t _{LOW}	1.3	-	-	0.4	-	-	us
Clock Pulse Width High	t _{HIGH}	0.6	-	-	0.4	-	-	us
Clock Low to Data Out Valid	t _{AA}	0.05	-	0.9	0.05	-	0.55	us
Noise Suppression Time	t _i	-	-	0.1	-	-	0.05	us
Time the bus must be free before a new transmission can start	t _{BUF}	1.3	-	-	0.5	-	-	us
Start Hold Time	t _{HD.STA}	0.6	-	-	0.25	-	-	us
Start Setup Time	t _{SU.STA}	0.6	-	-	0.25	-	-	us


/ AC Electrical Characteristics(Unless otherwise specified, $V_{CC} = 1.7V$ to $5.5V$, $T_A = 40^\circ C$ to $85^\circ C$)

Parameter	Symbol	1.7V $V_{CC} < 2.5V$			2.5V V_{CC} 5.5V			Unit
		Min	Typ	Max	Min	Typ	Max	
Data In Hold Time	$t_{HD.DAT}$	0	-	-	0	-	-	us
Data In Setup Time	$t_{SU.DAT}$	0.1	-	-	0.1	-	-	us
Inputs Rise Time[1]	t_R	-	-	0.3	-	-	0.3	us
Inputs Fall Time[1]	t_F	-	-	0.3	-	-	0.1	us
Stop Setup Time	$t_{SU.STO}$	0.6	-	-	0.25	-	-	us
Data Out Hold Time	t_{DH}	0.05	-	-	0.05	-	-	us
WCB pin Setup Time	$t_{SU.WCB}$	1.2	-	-	0.6	-	-	us
WCB pin Hold Time	$t_{HD.WCB}$	1.2	-	-	0.6	-	-	us
Write Cycle Time	t_{WR}	-	-	5	-	-	5	ms

Notes:AC measurement conditions:

1. R_L (connects to V_{CC}): 1.3k (2.5V, 5.5V), 10k (1.7V)
2. Input pulse voltages: 0.3 V_{CC} to 0.7 V_{CC}
3. Input rise and fall times: 50ns
4. Input and output timing reference voltages: 0.5 V_{CC}


/ Functional Block Diagram

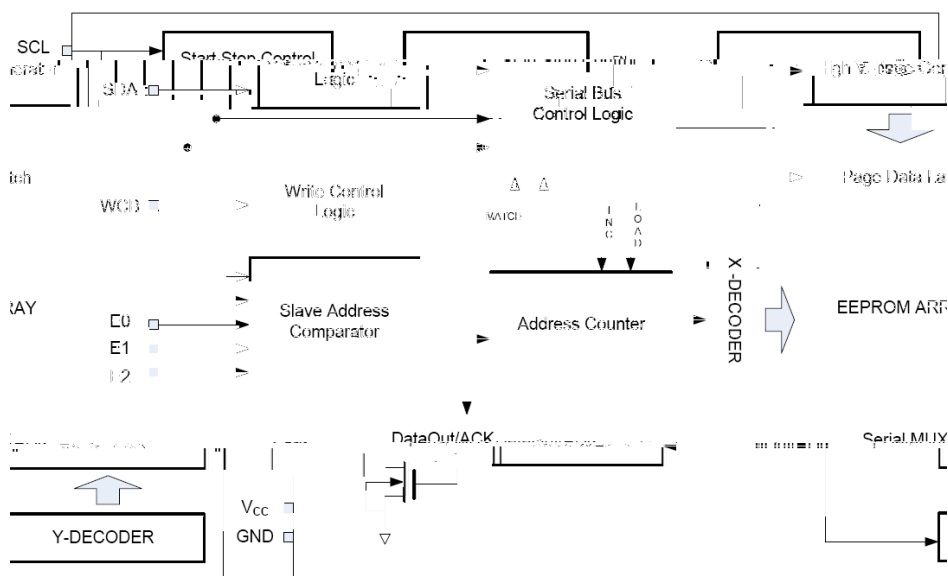

/ Functional Description

/ Data Input

The SDA pin is normally pulled high with an external device. Data on the SDA pin may change only during SCL low time periods (see to Figure 1). Data changes during SCL high periods will indicate a start or stop condition as defined below.

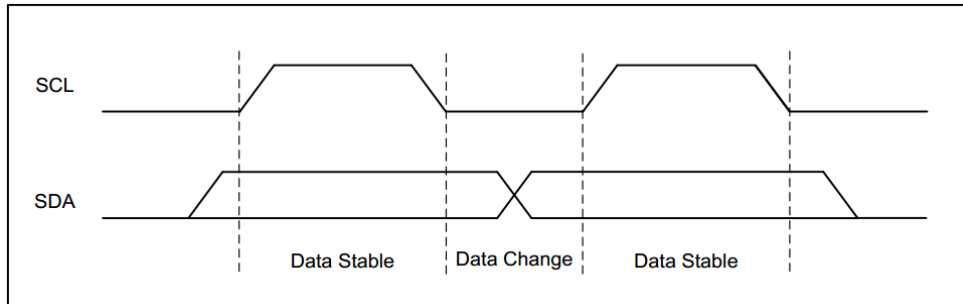


/ Start Condition

A high-to-low transition of SDA with SCL high is a start condition which must precede any other command (see to Figure 2).

/ Stop Condition


A low-to-high transition of SDA with SCL high is a stop condition. After a read sequence, the stop command will place the BRCM24C02SC in a standby power mode (see Figure 2).

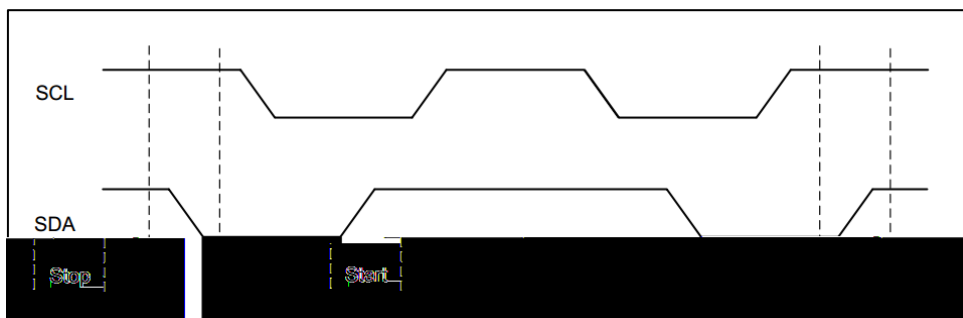

ACK / Acknowledge

/ Functional Description

All addresses and data words are serially transmitted to and from the BRCM24C02SC in 8-bit words. The BRCM24C02SC sends a “0” to acknowledge that it has received each word. This happens during the ninth clock cycle.

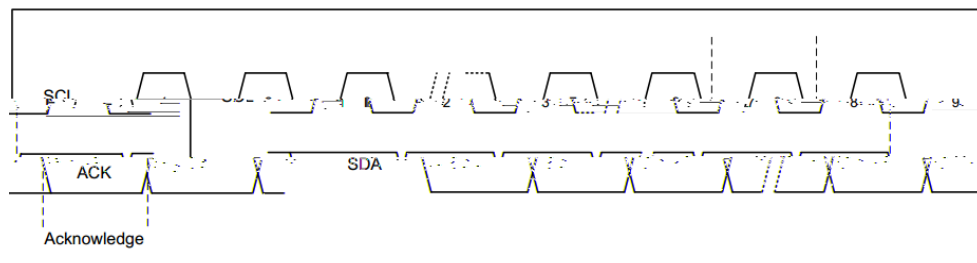


/ Standby Mode

The BRCM24C02SC features a low-power standby mode which is enabled: (a) after a fresh power up, (b) after receiving a STOP bit in read mode, and (c) after completing a self-time internal programming operation.

/ Soft Reset

After an interruption in protocol, power loss or system reset, any two-wire part can be reset by following these steps: (a) Create a start condition, (b) Clock nine cycles, and (c) create another start bit followed by stop bit condition, as Figure 4 . The device is ready for the next communication after the above steps have been completed.

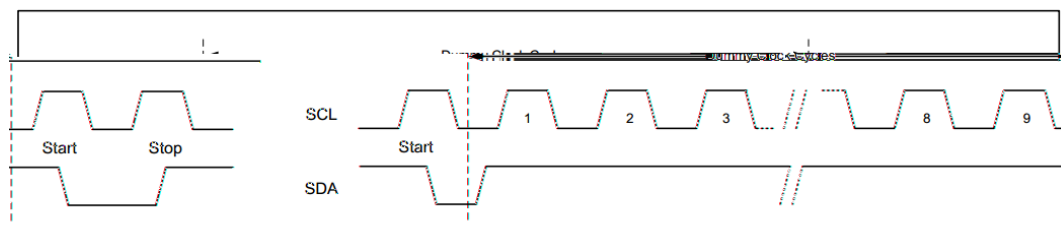

/ Device Addressing

The BRCM24C02SC requires an 8-bit device address word following a start condition to enable the chip for a read or write operation (see table 1). The device address word consists.

/ Functional Description

Chip	Access area	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
BRCM24C02SC	Normal Area	1	0	1	0	E2	E1	E0	R/W
	ID Page	1	0	1	1	E2	E1	E0	R/W
	Lock Bit	1	0	1	1	E2	E1	E0	R/W
	Serial Number	1	0	1	1	E2	E1	E0	1

Table 1 Device Address

Chip	Access area	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
BRCM24C02SC	Normal Area	A7	A6	A5	A4	A3	A2	A1	A0
	ID Page	0	0	A5	A4	A3	A2	A1	A0
	Lock Bit	X	1	X	X	X	X	X	X
	Serial Number	1	0	A5	A4	A3	A2	A1	A0

Table 2 Word Address

/ Functional Description

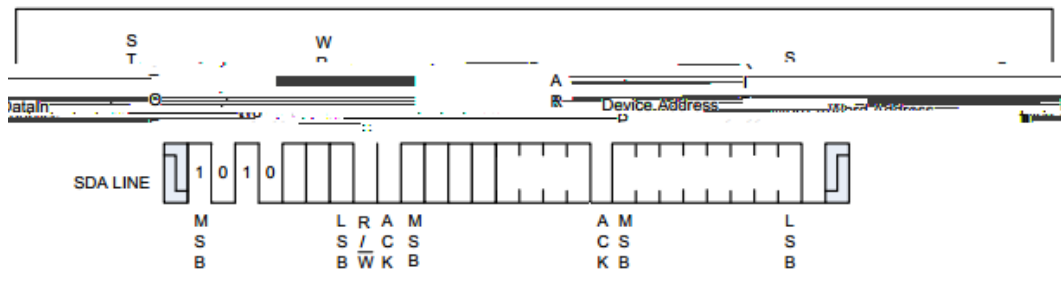


Figure 5 Byte Write

/ Page Write

A page write is initiated the same as a byte write, but the master does not send a stop condition after the first data word is clocked in. Instead, after the BRCM24C02SC acknowledges receipt of the first data word, the master can transmit more data words. The BRCM24C02SC will respond with a “0” after each data word received. The microcontroller must terminate the page write sequence with a stop condition.

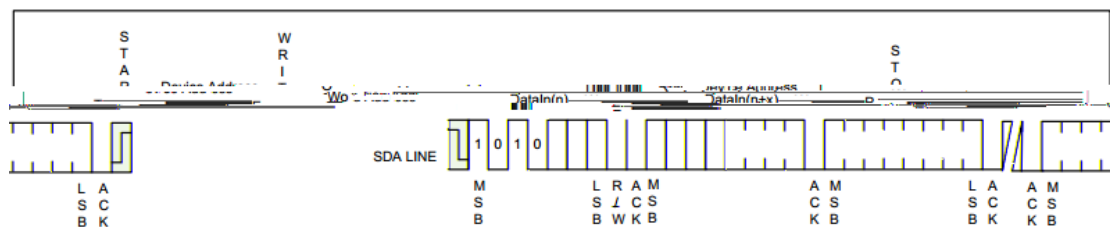


Figure 6 Page Write

The lower three bits of the data word address are internally incremented following the receipt of each data word. The higher data word address bits are not incremented, retaining the memory page row location. When the word address, internally generated, reaches the page boundary, the following byte is placed at the beginning of the same page. If more than 8 data words are transmitted to the BRCM24C02SC, the data word address will roll-over, and previous data will be overwritten. The address roll-over during write is from the last byte of the current page to the first byte of the same page.

/ Functional Description**/ Acknowledge Polling**

Once the internally timed write cycle has started and the BRCM24C02SC inputs are disabled, acknowledge polling can be initiated. This involves sending a start condition followed by the device address word. The read/write bit is representative of the operation desired. Only if the internal write cycle has completed will the BRCM24C02SC respond with a “0”, allowing the read or write sequence to continue.

/ Write Identification Page

The Identification Page (16 bytes) is an additional page which can be written and (later) permanently locked in Read-only mode. It is written by the Write Identification Page instruction. This instruction uses the same protocol and format as Page Write (into memory array), except for the following differences:

- (a) Device type identifier = 1011b.
- (b) Address bits A5/A4 are don't care while address bit A7/A6 which must be '00'.
- (c) Address bits A3/A0 define the byte address inside the Identification page. If the Identification page is locked, the data bytes transferred during the Write Identification Page instruction are not acknowledged (NoACK).

/ Lock Identification Page

The Lock Identification Page instruction (Lock ID) permanently locks the Identification page in Read-only mode. The Lock ID instruction is similar to Byte Write (into memory array) with the following specific conditions:

- (a) Device type identifier = 1011b.
- (b) Address bit A6 must be '1' all other address bits are don't care.
- (c) The data byte must be equal to the binary value xxxx xx1x, where x is don't care.


/ Functional Description

/ Read Operations

Read operations are initiated the same way as write operations with the exception that the read/write select bit in the device address word is set to “1”. There are three read operations: Current Address Read; Random Address Read and Sequential Read.

/ Current Address Read

The internal data word address counter maintains the last address accessed during the last read or write operation, incremented by one. This address stays valid between operations as long as the chip power is maintained. The address roll-over during read is from the last byte of the last memory page to the first byte of the first page. Once the device address with the read/write select bit set to “1” is clocked in and acknowledged by the BRCM24C02SC, the current address data word is serially clocked out. The microcontroller does not respond with an input “0” but does generate a following stop condition (see Figure7).

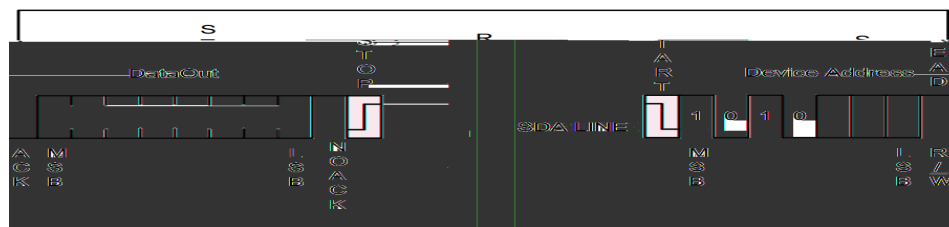


Current Address Read

/ Random Address Read


A Random Read requires a “dummy” byte write sequence to load in the data word address. Once the device address word and data word address are clocked in and acknowledged by the BRCM24C02SC, the microcontroller must generate another start condition. The microcontroller now initiates a Current Address Read by sending a device address with the read/write select bit high. The BRCM24C02SC acknowledges the device address and serially clocks out the data word. The microcontroller does not respond with a “0” but does generate a following stop condition (see Figure 8).

/ Functional Description

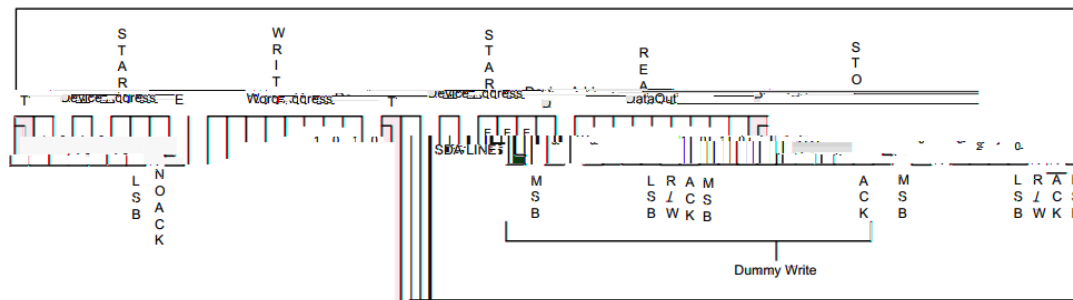

/ Sequential Read

Sequential Reads are initiated by either a Current Address Read or a Random Address Read. After the microcontroller receives a data word, it responds with acknowledge. As long as the BRCM24C02SC receives acknowledge, it will continue to increment the data word address and serially clock out sequential data words. When the memory address limit is reached, the data word address will roll-over and the Sequential Read will continue. The Sequential Read operation is terminated when the microcontroller does not respond with a "0" but does generate a following stop condition (see Figure 9).

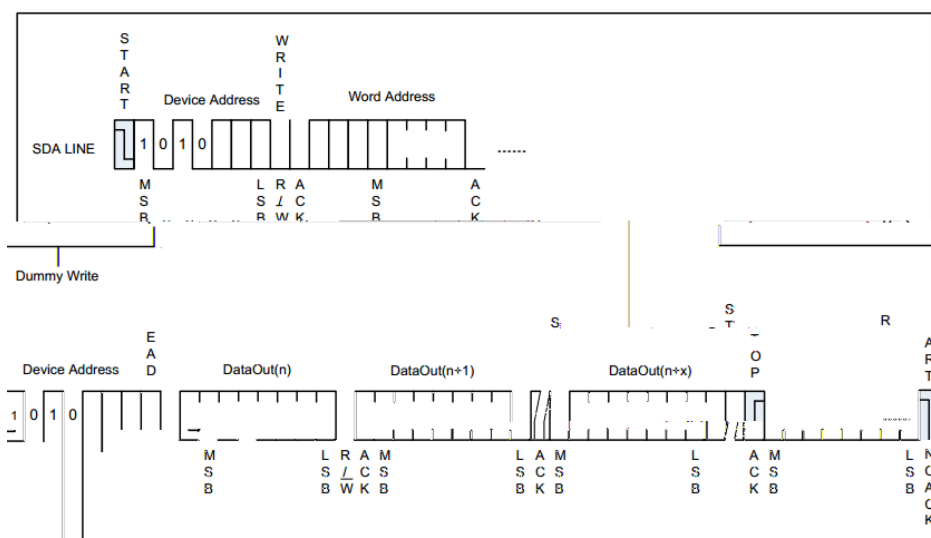

Sequential Read

/ Functional Description

/ Read Identification Page

The Identification Page (16 bytes) is an additional page which can be written and (later) permanently locked in Read-only mode. The Identification Page can be read by Read Identification Page instruction which uses the same protocol and format as the Read Command (from memory array) with device type identifier defined as 1011b. The MSB address bits A7/A6 must be 0 while A5 is don't care, and the LSB address bits A4/A0 define the byte address inside the Identification Page. The number of bytes to read in the ID page must not exceed the page boundary (e.g. when reading the Identification Page from location 10d, the number of bytes should be less than or equal to 6, as the ID page boundary is 16 bytes).

/ Read the Lock Status

The locked/unlocked status of the Identification page can be checked by transmitting a specific truncated command [Identification Page Write instruction + one data byte] to the device. The device returns an acknowledge bit if the Identification page is unlocked, otherwise a NoACK bit if the Identification page is locked (see Figure 10).

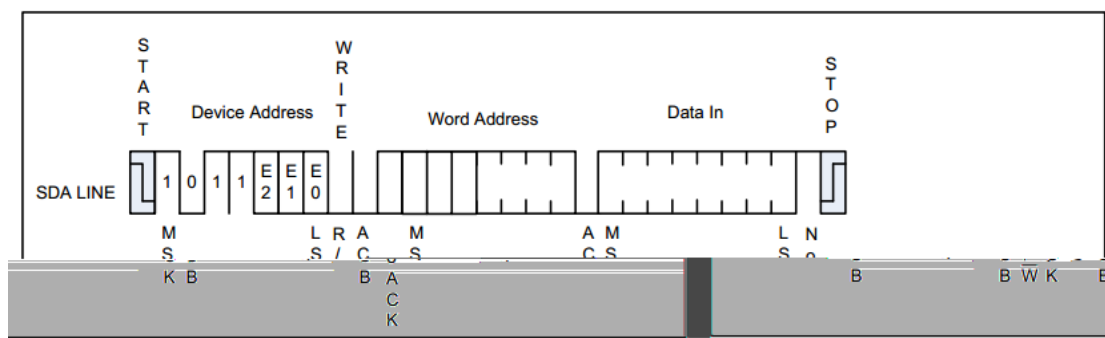


Figure 10 Lock Status Read (When Identification page locked, return NoACK after one data byte)

/ Read Serial Number

/ Functional Description

The Identification Page (16 bytes) is an additional page which can be written and (later) permanently locked in Read-only mode.


Reading the serial number is similar to the sequential read sequence but requires use of the device address seen in Table 1 on page 9, a dummy write, and the use of a specific word address. The entire 128-bit value must be read from the starting address of the serial number block to guarantee a unique number.

Since the address pointer of the device is shared between the regular EEPROM array and the serial number block, a dummy write sequence, as part of a Random Read or Sequential Read protocol, should be performed to ensure the address pointer is set to zero. A Current Address Read of the serial number block is supported but if the previous operation was to the EEPROM array, the address pointer will retain the last location accessed, incremented by one. Reading the serial number from a location other than the first address of the block will not result in a unique serial number.

Additionally, the word address contains a '10' sequence in bit A7 and A6 of the word address, regardless of the intended address as depicted in Table 2 . If a word address other than '10' is used, then the device will output undefined data.

Example: If the application desires to read the first byte of the serial number, the word address input would need to be 80h.


When the end of the 128-bit serial number is reached (16 bytes of data), continued reading of the extended memory region will result in repeated serial number data readout for the data word address will roll-over back to the beginning of the 128-bit serial number. The Serial Number Read operation is terminated when the microcontroller does not respond with a zero (ACK) and instead issues a Stop condition (see Figure 11)

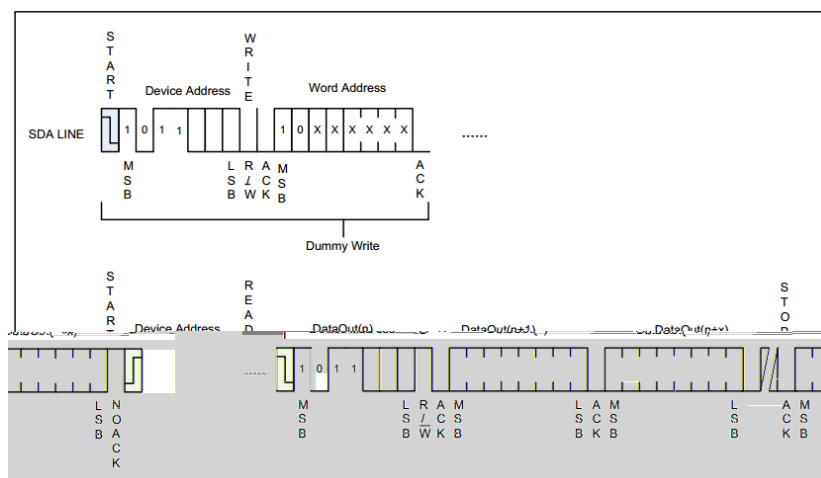




/ Time Sequence Diagram

Bus Timing

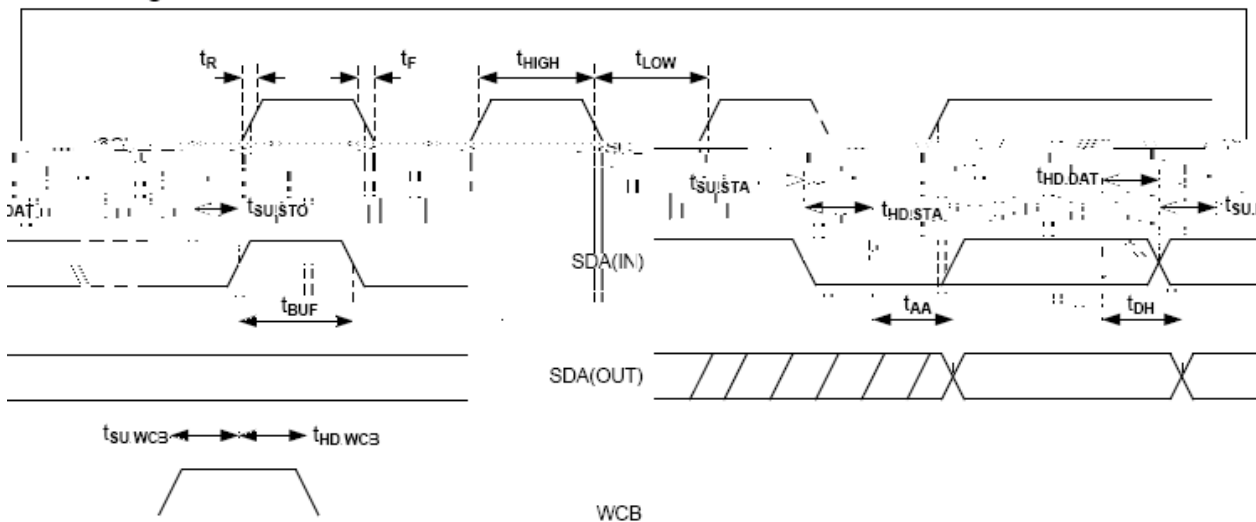

Write Cycle Timing

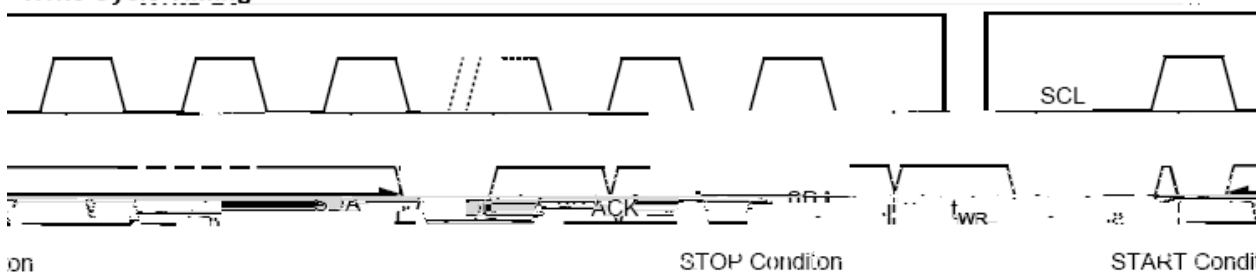


nal clear/write cycle.

Note: The write cycle time t_{WR} is the time from a valid stop condition of a write sequence to the end of the internal clear/write cycle.

/ Package Dimensions



/ Marking Instructions

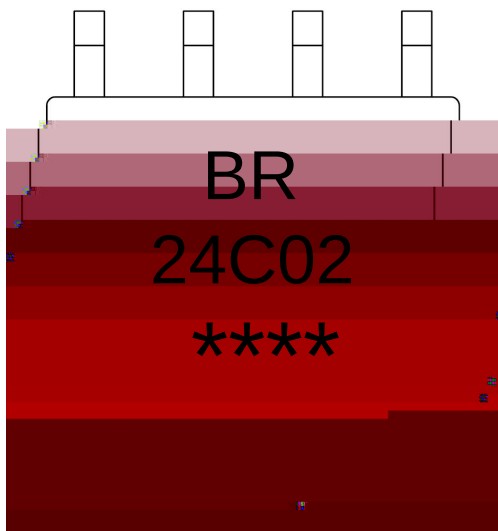

BR


Note:

BR: Company Code.

24C02: Product Type.

****: Lot No. Code, code change with Lot No.

() /

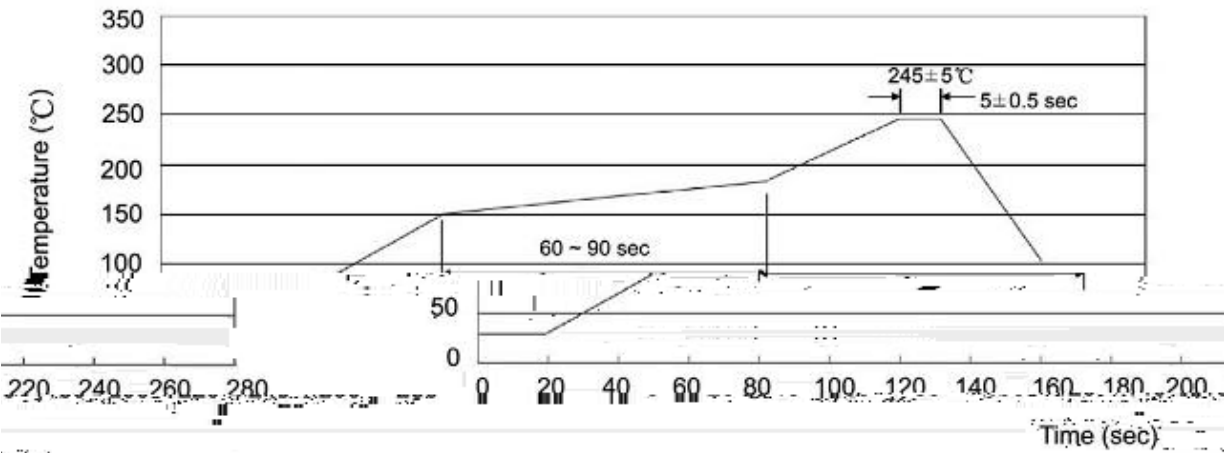

Note:

- 1

150 180

60 90sec;
- 2

245 5

5 0.5sec;
- 3

2 10

/sec.
- 1.Preheating:150~180

, Time:60~90sec.
- 2.Peak Temp.:245 5

, Duration:5 0.5sec.
3. Cooling Speed: 2~10

/sec.

/ Resistance to Soldering Heat Test Conditions

260 5 10 1 sec. Temp.:260 5 Time:10 1 sec

/ Packaging SPEC.

/ REEL

Package Type	Units					Dimension (unit mm ³)		
	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
SOP/ESOP-8	4,000	2	8,000	6	48,000	13 ×12	360×360×50	380×335×366

/ Notices