

/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning

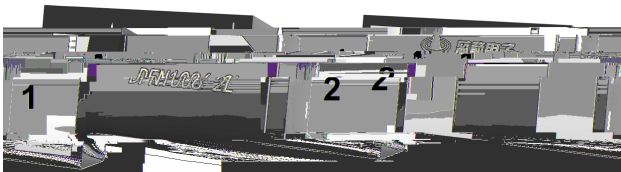

/ Marking

--	--


/ Absolute Maximum Ratings(Ta=25)

	$\leq \mu \delta \leq$		
	(μ)		
	$()$		
		~	
	θ		


/ Electrical Characteristics(Ta=25)

						μ
		$^{\circ}\text{C}$				μ
		Ω				
		μ				

/ Electrical Characteristic Curve

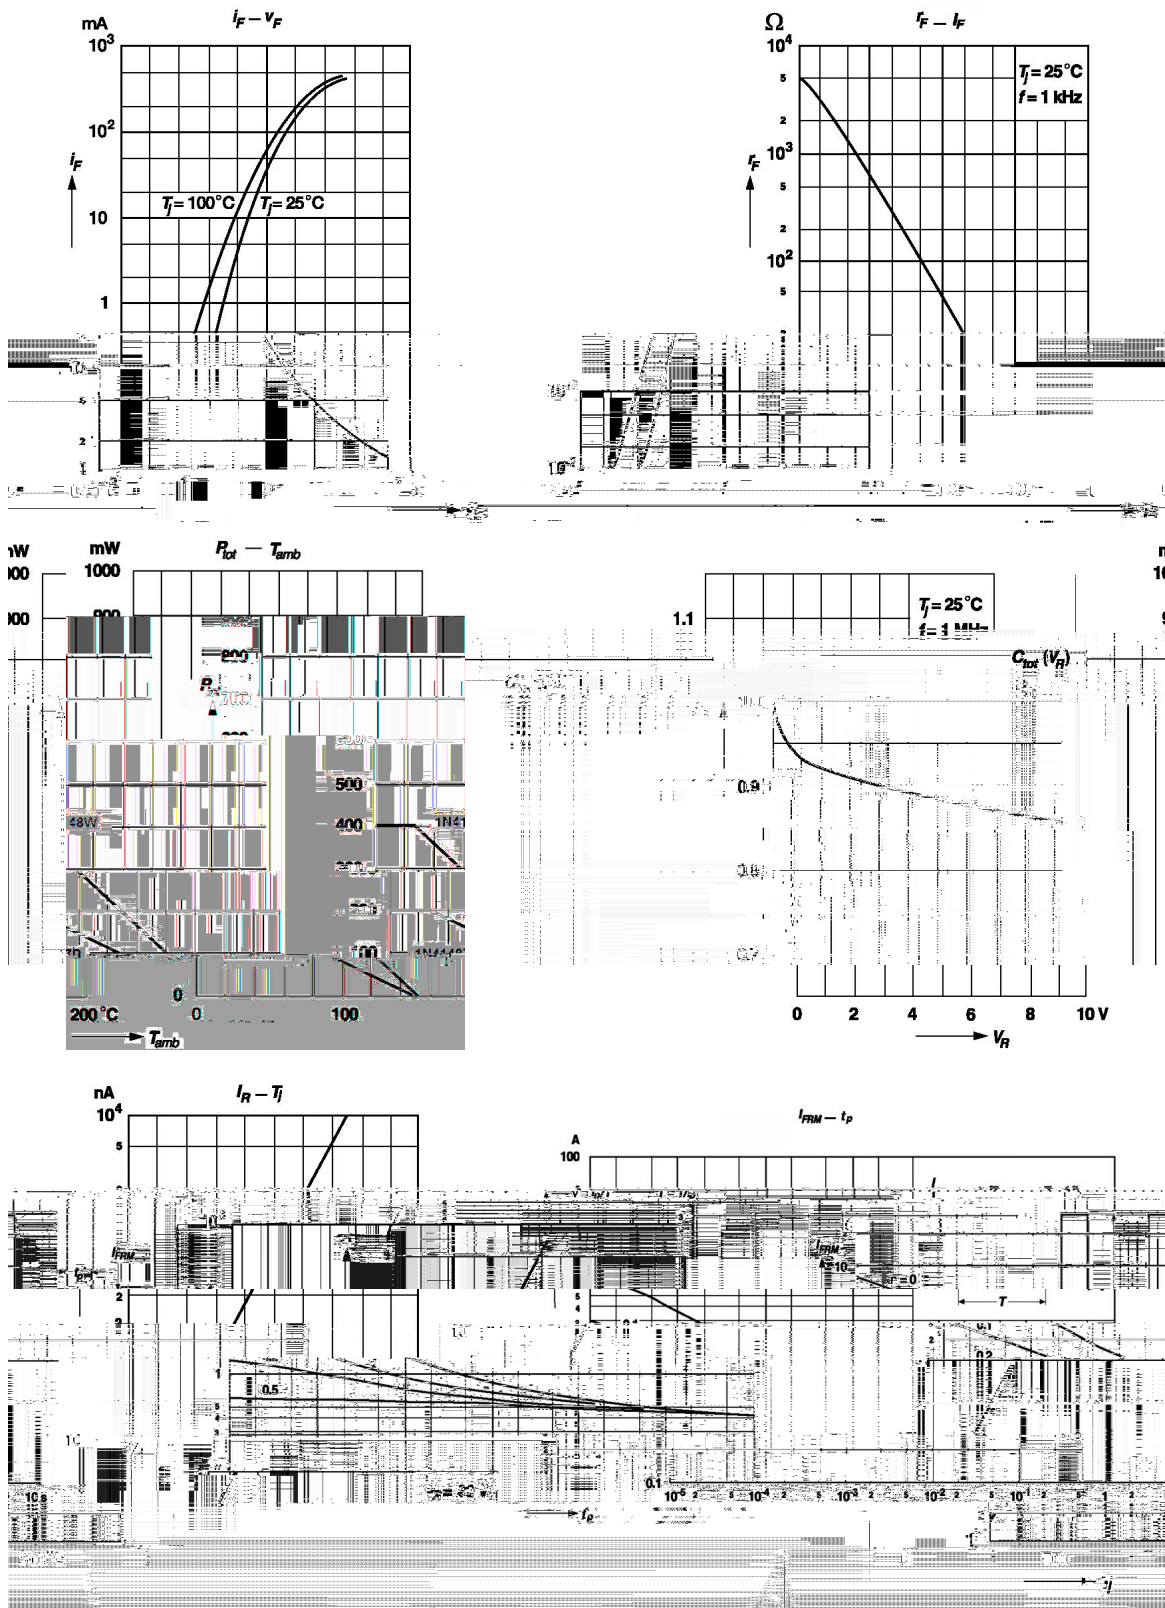

/ Package Dimensions

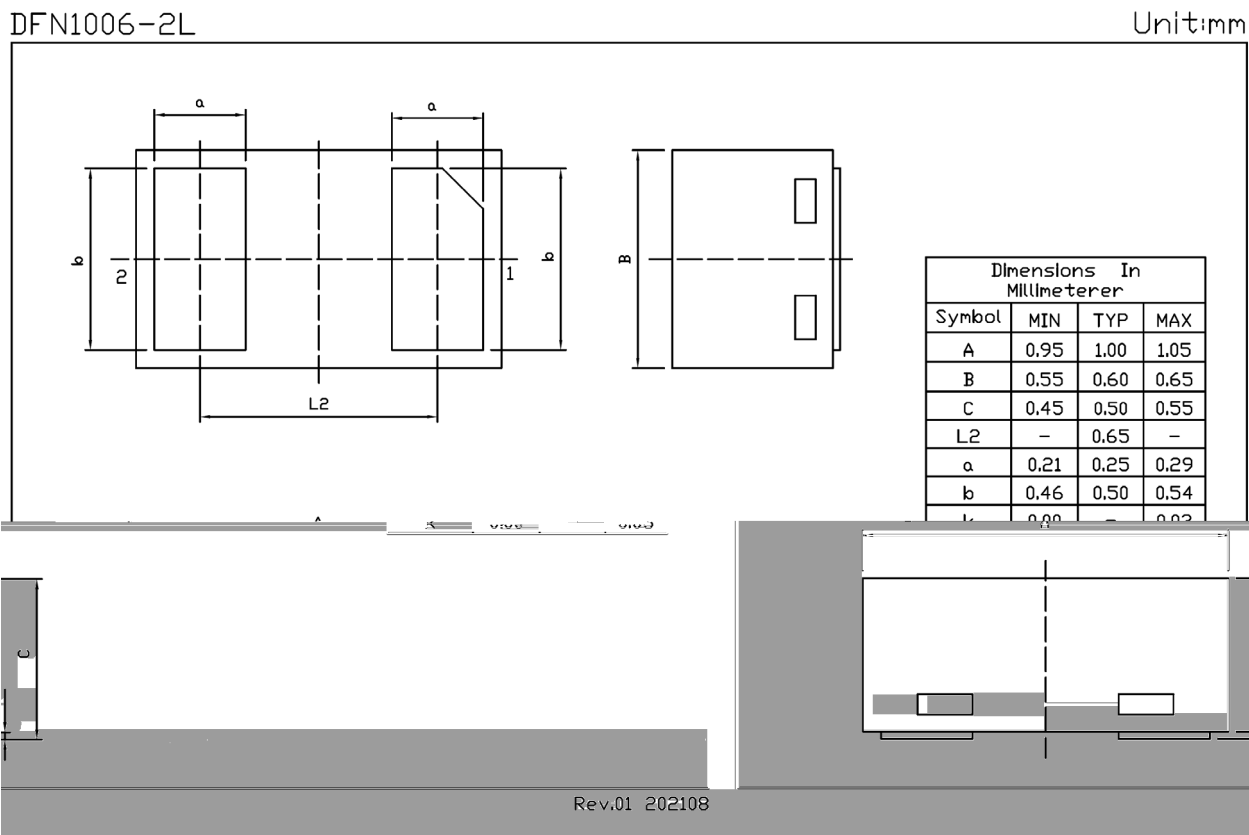


/ Marking Instructions



H

A2

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

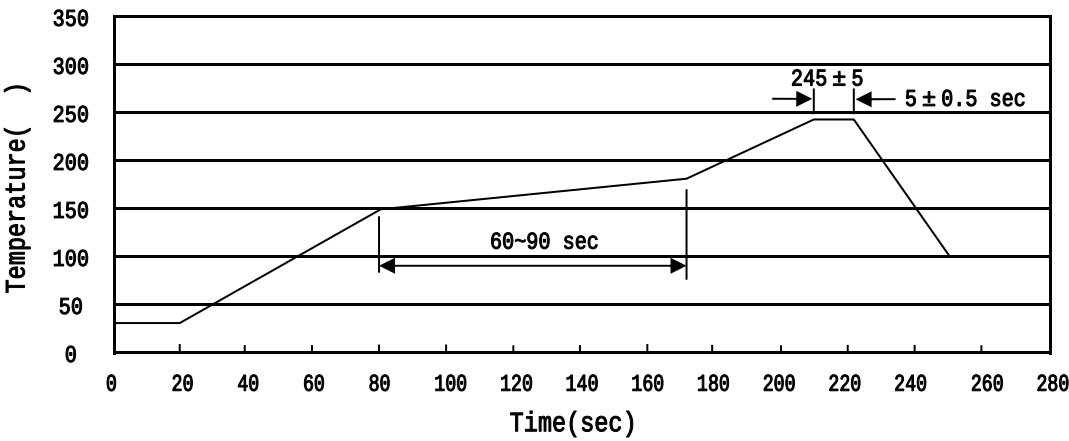

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

						"		

/ Notices