

/ Descriptions

SOT-23 PNP


/ Features

， ， h_{FE} ， ， 2SC1815M


/ Applications

，

/ Equivalent Circuit



/ Pinning



/ h_{FE} Classifications & Marking

	~	~	~








/ Absolute Maximum Ratings(Ta=25)

		~	


/ Electrical Characteristics(Ta=25)

		Ω				

/ Electrical Characteristic Curve

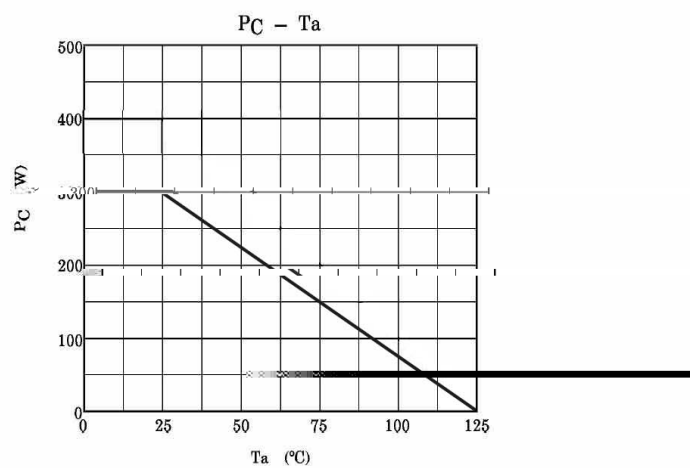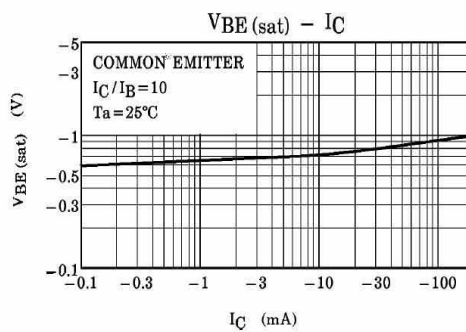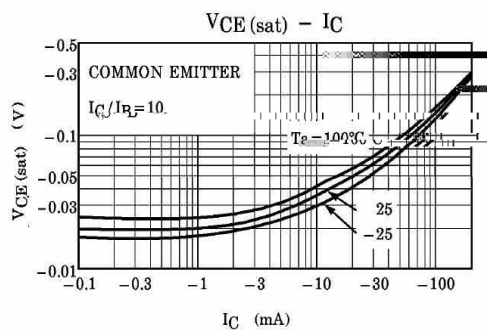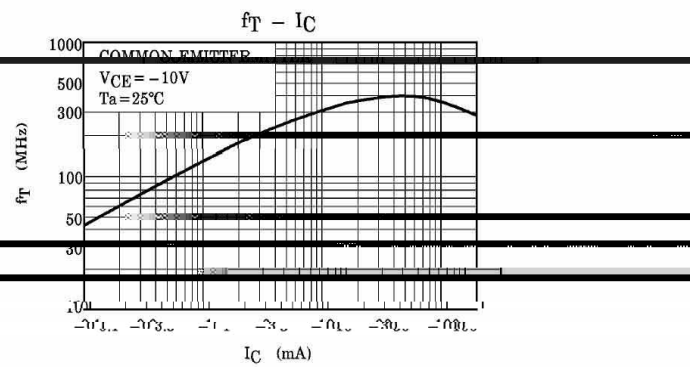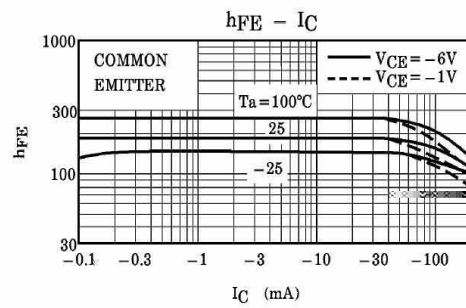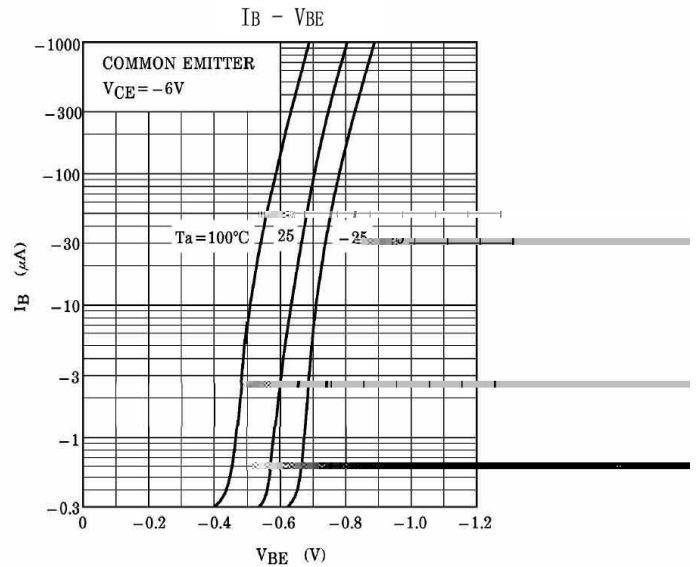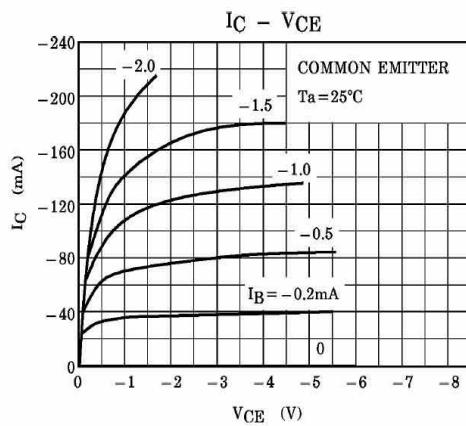


/ Marking Instructions

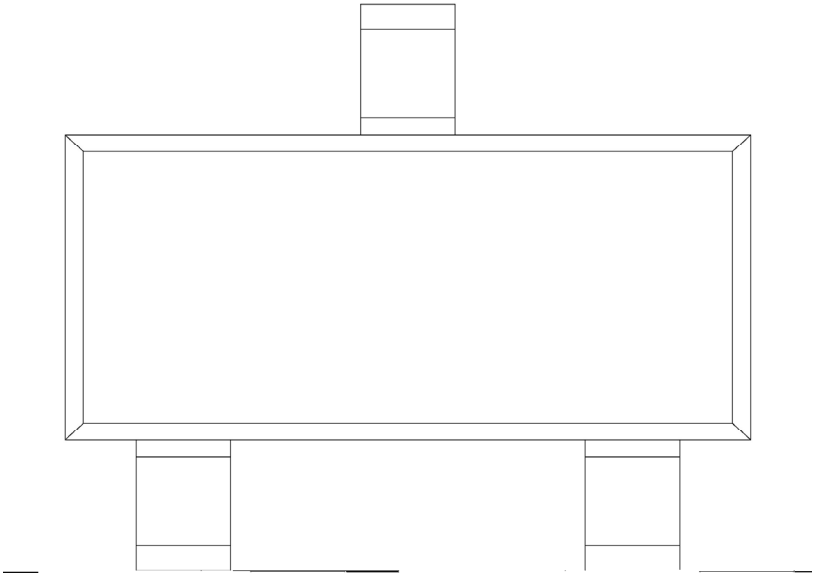

H
BA
O:

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

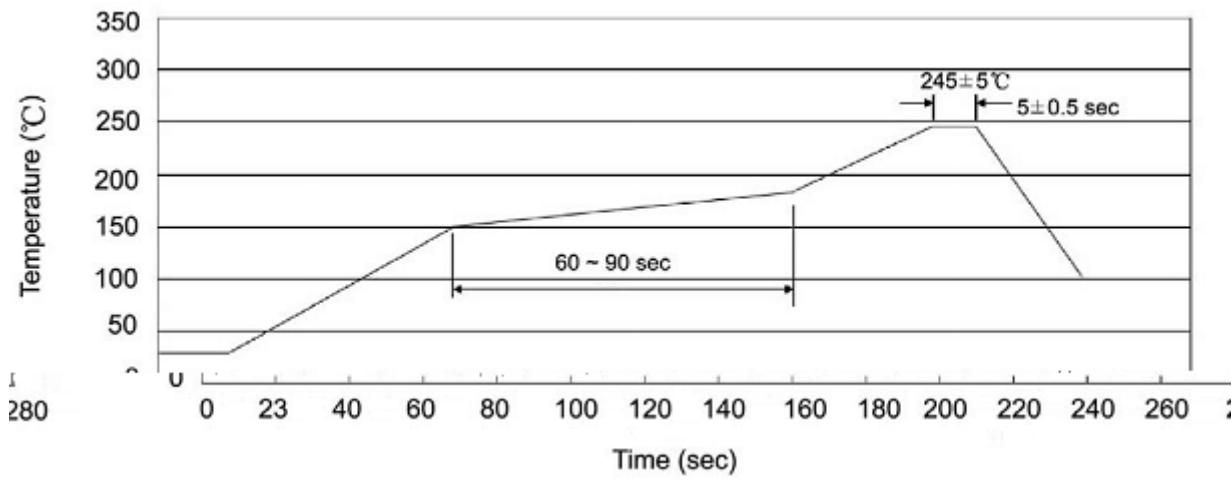

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-23	3,000	10	30,000	8	180,000	7" ×8	180×120×180	390×385×205

/ Notices