


/ Descriptions

/ Features

/ Applications

/ Equivalent Circuit



/ Pinning



/ h_{FE} Classifications & Marking


/ Absolute Maximum Ratings(Ta=25)

			℃
			℃


/ Electrical Characteristics(Ta=25)

		μ				
		∞				
		μ				
						μ
						μ


/ Electrical Characteristic Curve

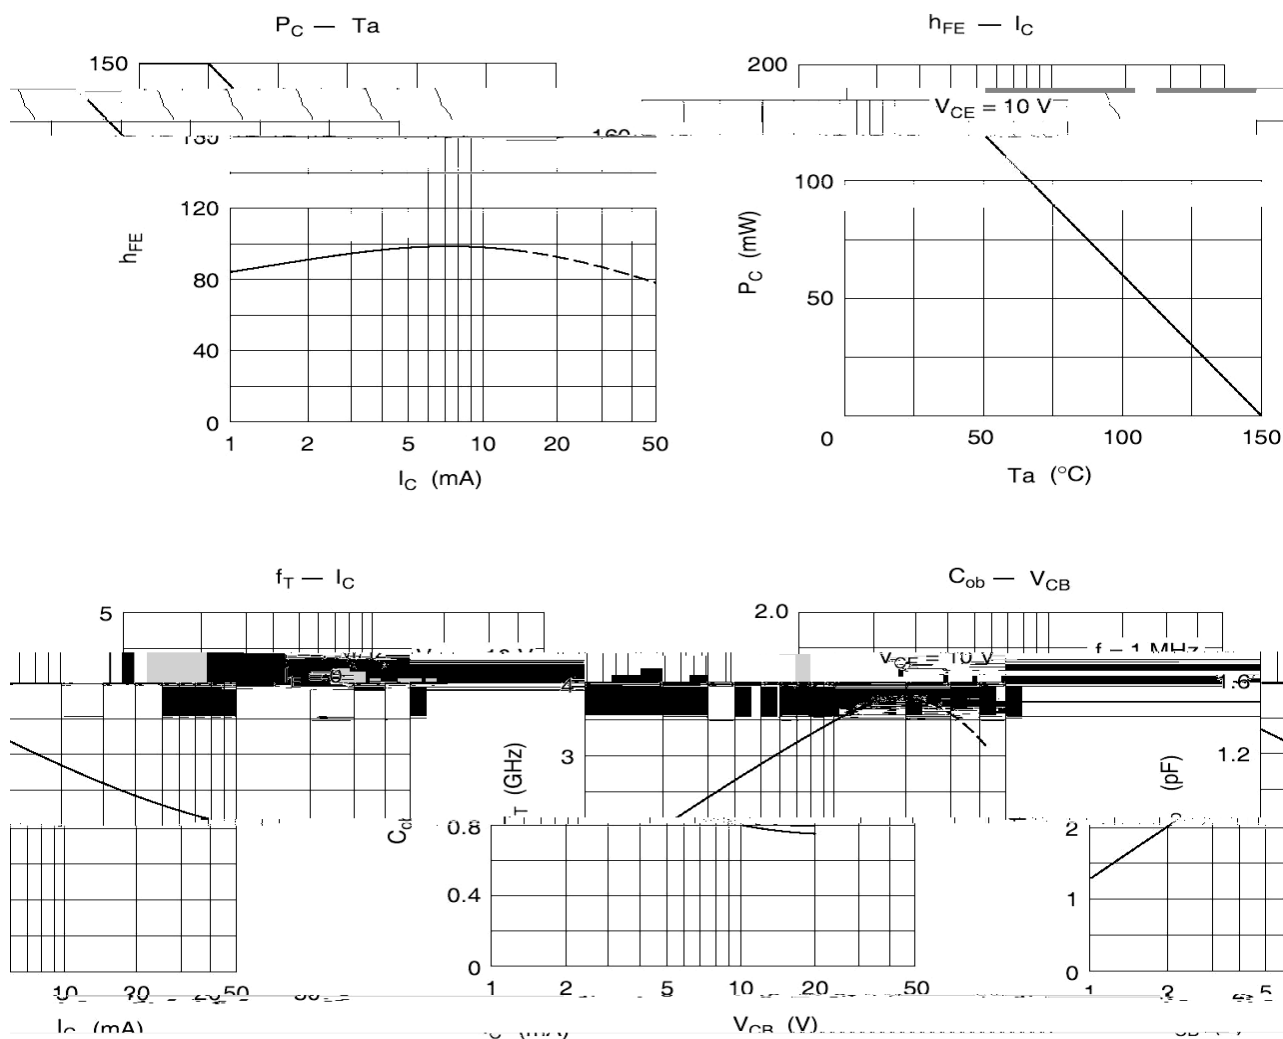

/ Marking Instructions

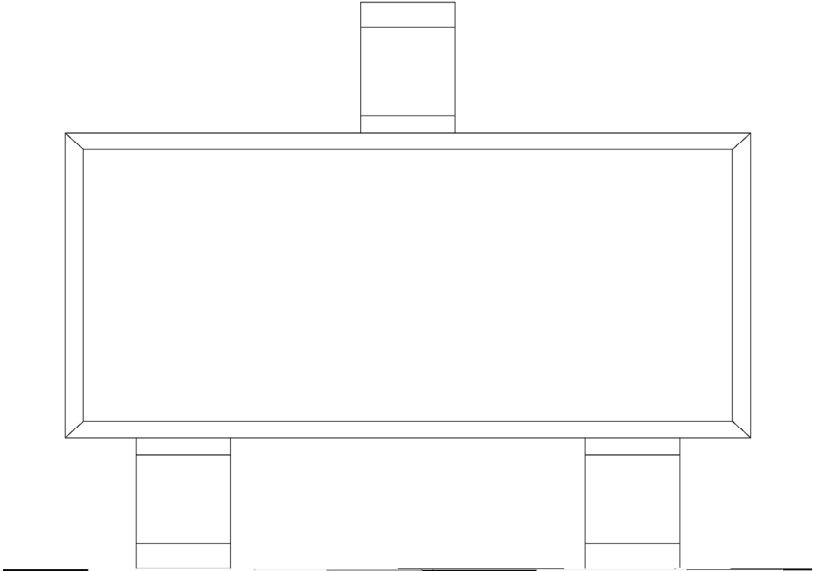

() /

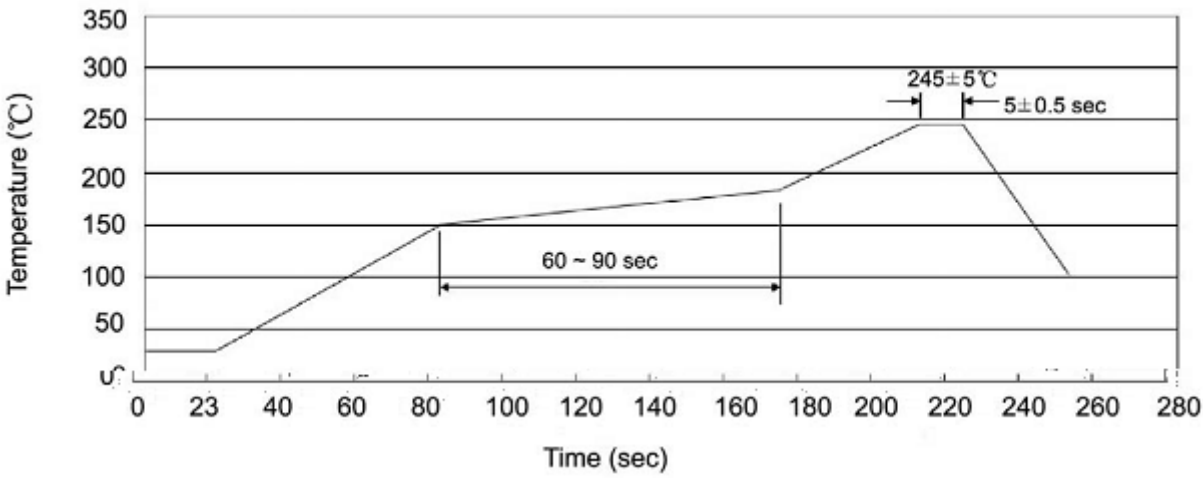

/ Resistance to Soldering Heat Test Conditions

℃

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	只 卷盘	卷盘 盒	只 盒	盒 箱	只 箱		盒	箱

/ Notices