


/ Descriptions


/ Features

/ Applications

/ / Equivalent Circuit or Application Circuit

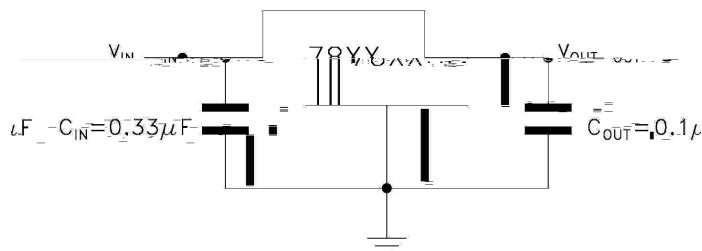

/ Pinning

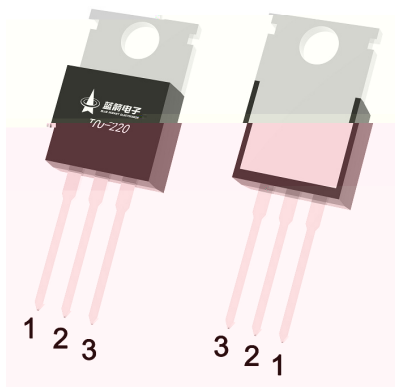

/ Marking







/ Absolute Maximum Ratings(Ta=25)

	θ		
	θ		

/ Electrical Characteristics(Ta=25 Vi=10V,Io=500mA unless otherwise specified)

		$\leq$				
						μ
						Ω


/ Electrical Characteristic Curve

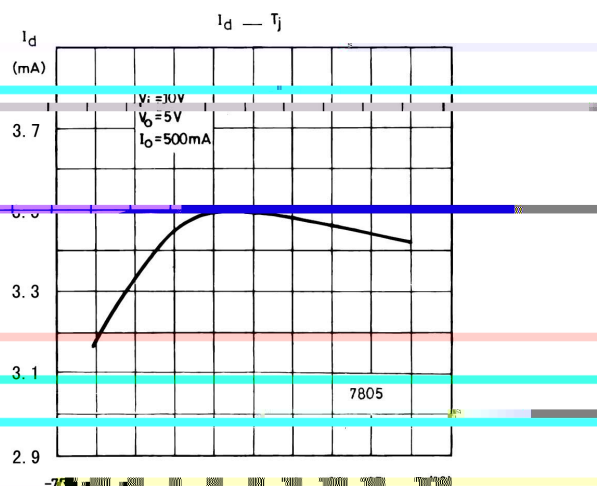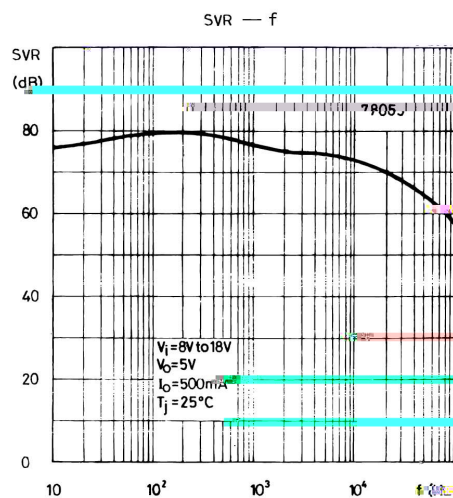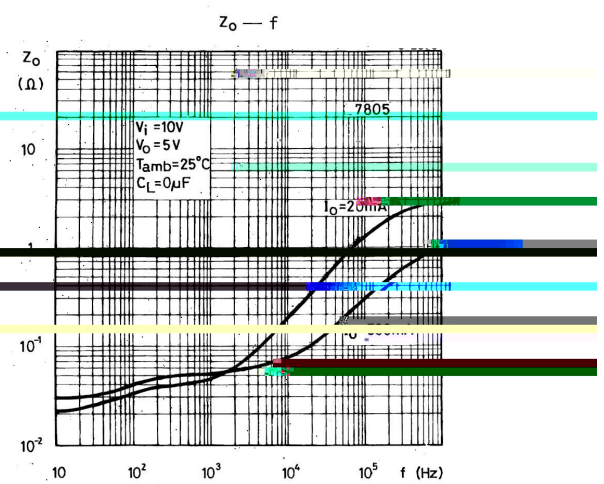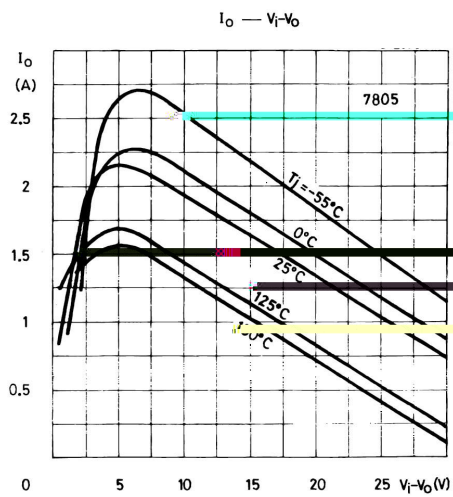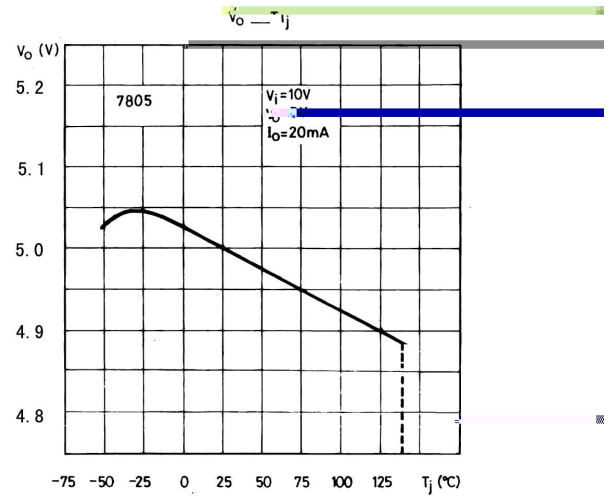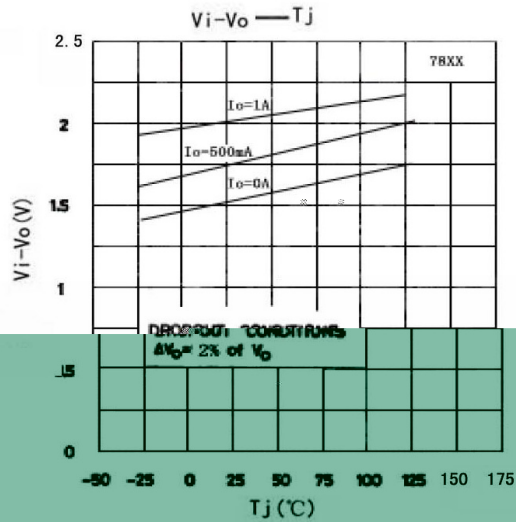

/ Package Dimensions


TO-220

单位: mm

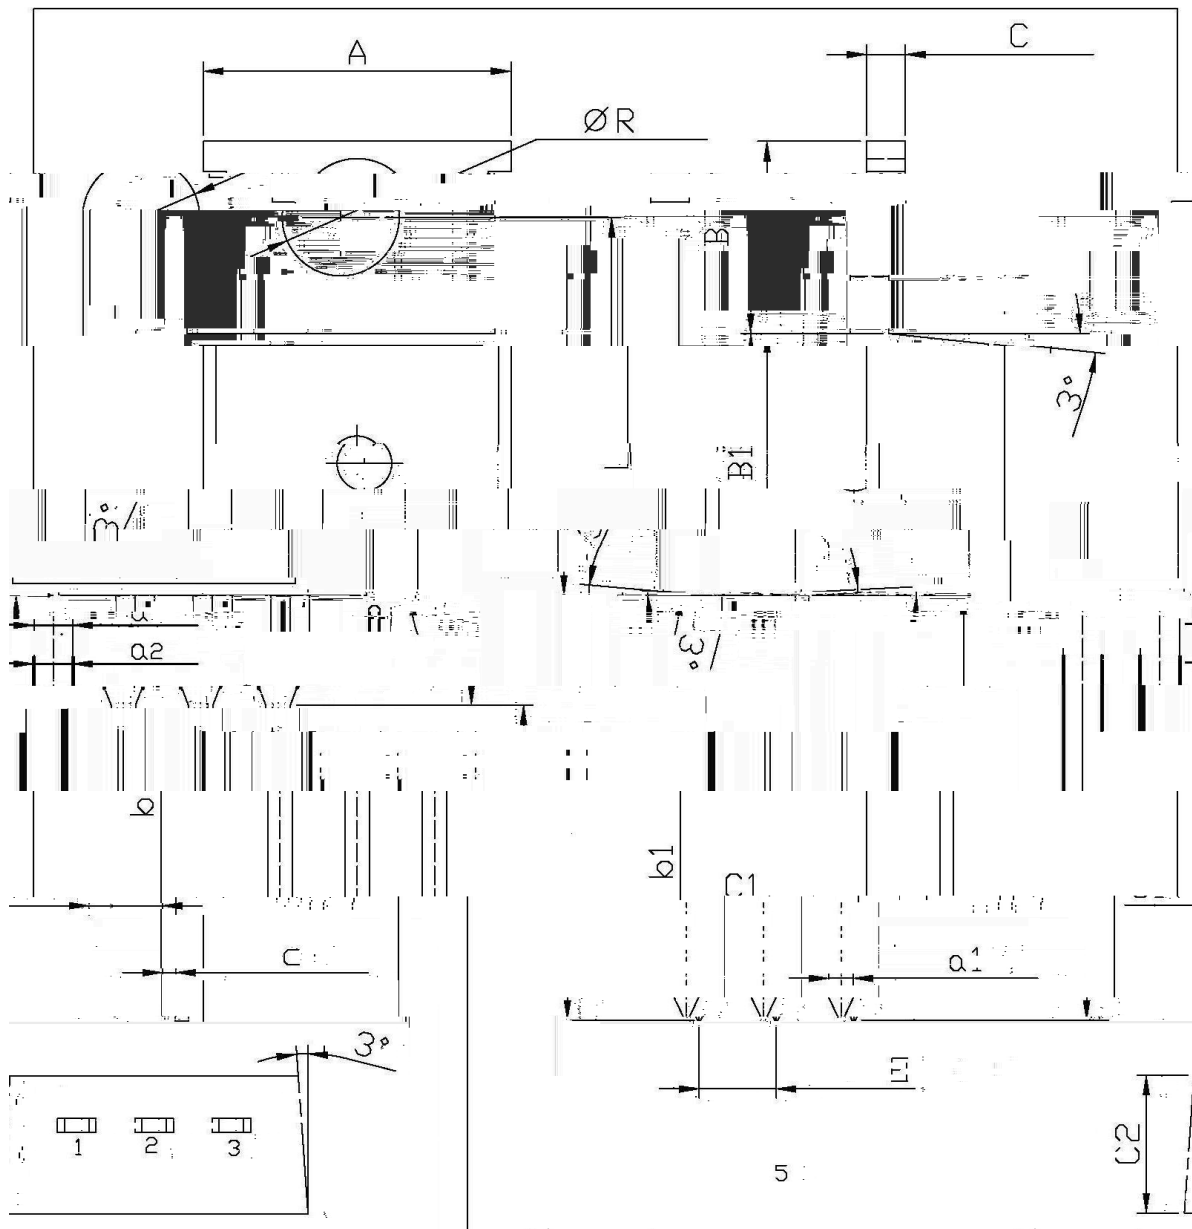


Dimensions In Millimeters			Dimensions In Millimeters		
Symbol	Min	Max	Symbol	Min	Max
A	9.8	10.2	C	1.2	1.4
R	3.56	3.64	B	6.3	6.7
$\perp$	15.7	16.1	B1	9.0	9.4
b1	12.6	13.6	C1	2.2	2.6

/ Marking Instructions

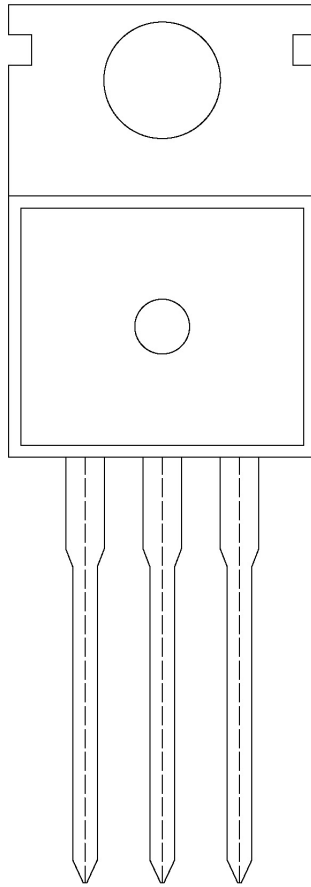

() / Temperature Profile for Dip Soldering(Pb-Free)

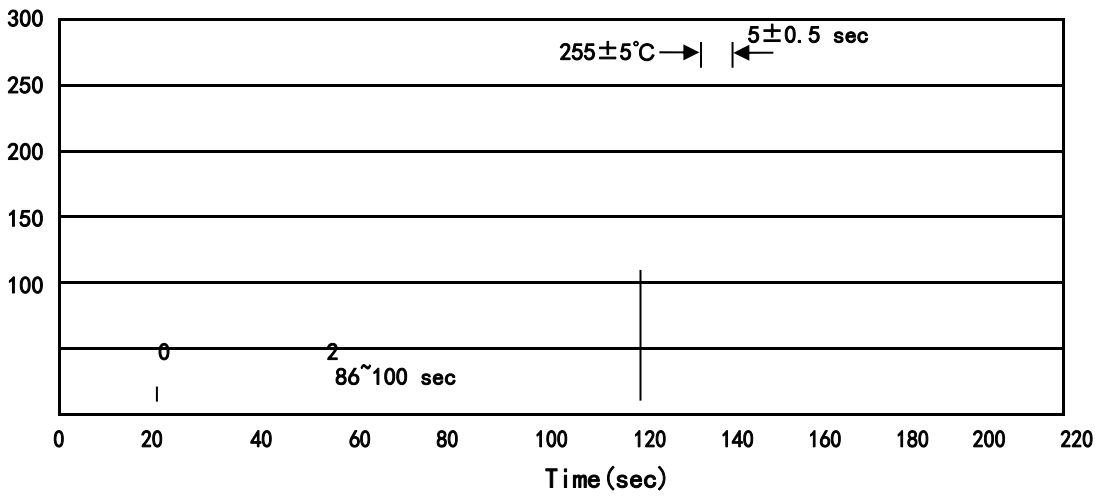

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

	Units/Bag /	Bags/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Bag	Inner Box	Outer Box

	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box

/ Notices