


/ Descriptions

/ Features

/ Applications

/ / Equivalent Circuit or Application Circuit

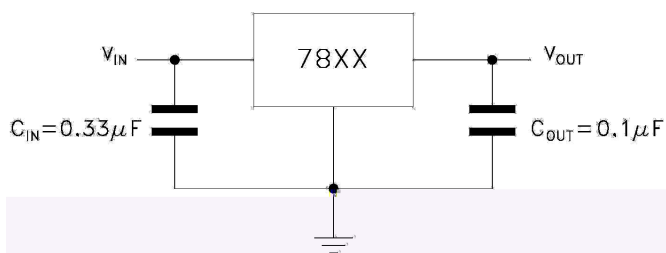

/ Pinning



/ Marking







/ Absolute Maximum Ratings(Ta=25)

	θ		
	θ		


/ Electrical Characteristics(Ta=25 Vi=16V,Io=500mA unless otherwise specified)

		℃				
		≤				
						μ
						Ω


/ Electrical Characteristic Curve

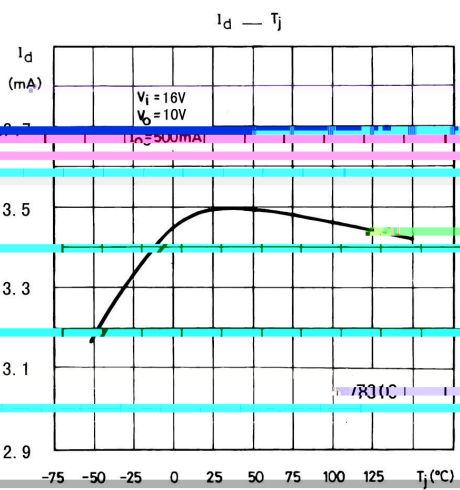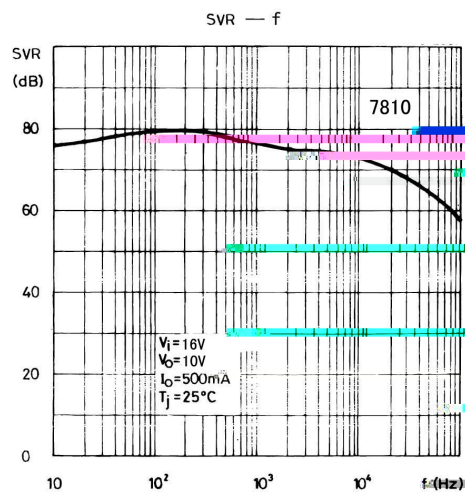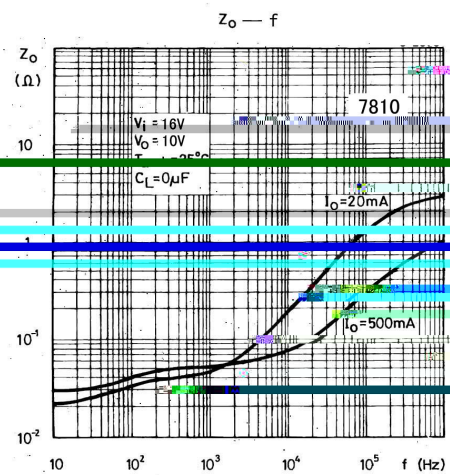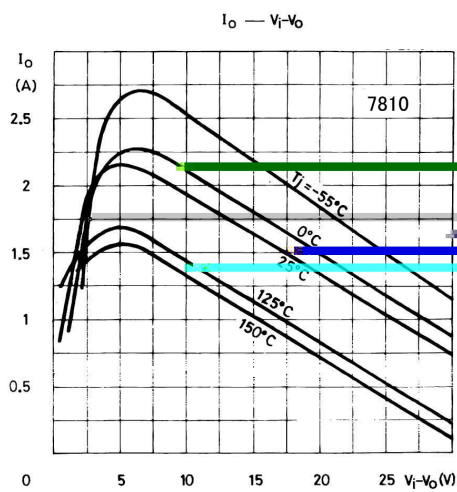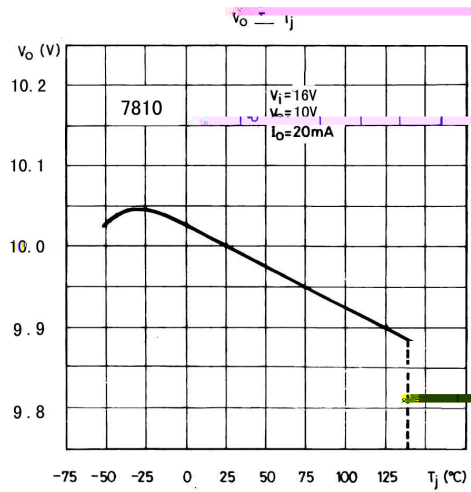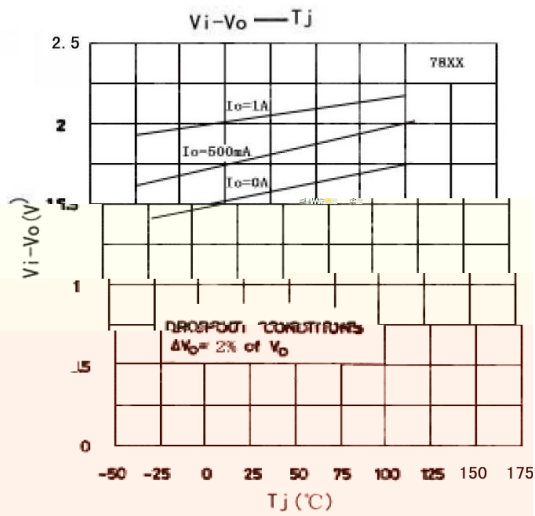

/ Package Dimensions

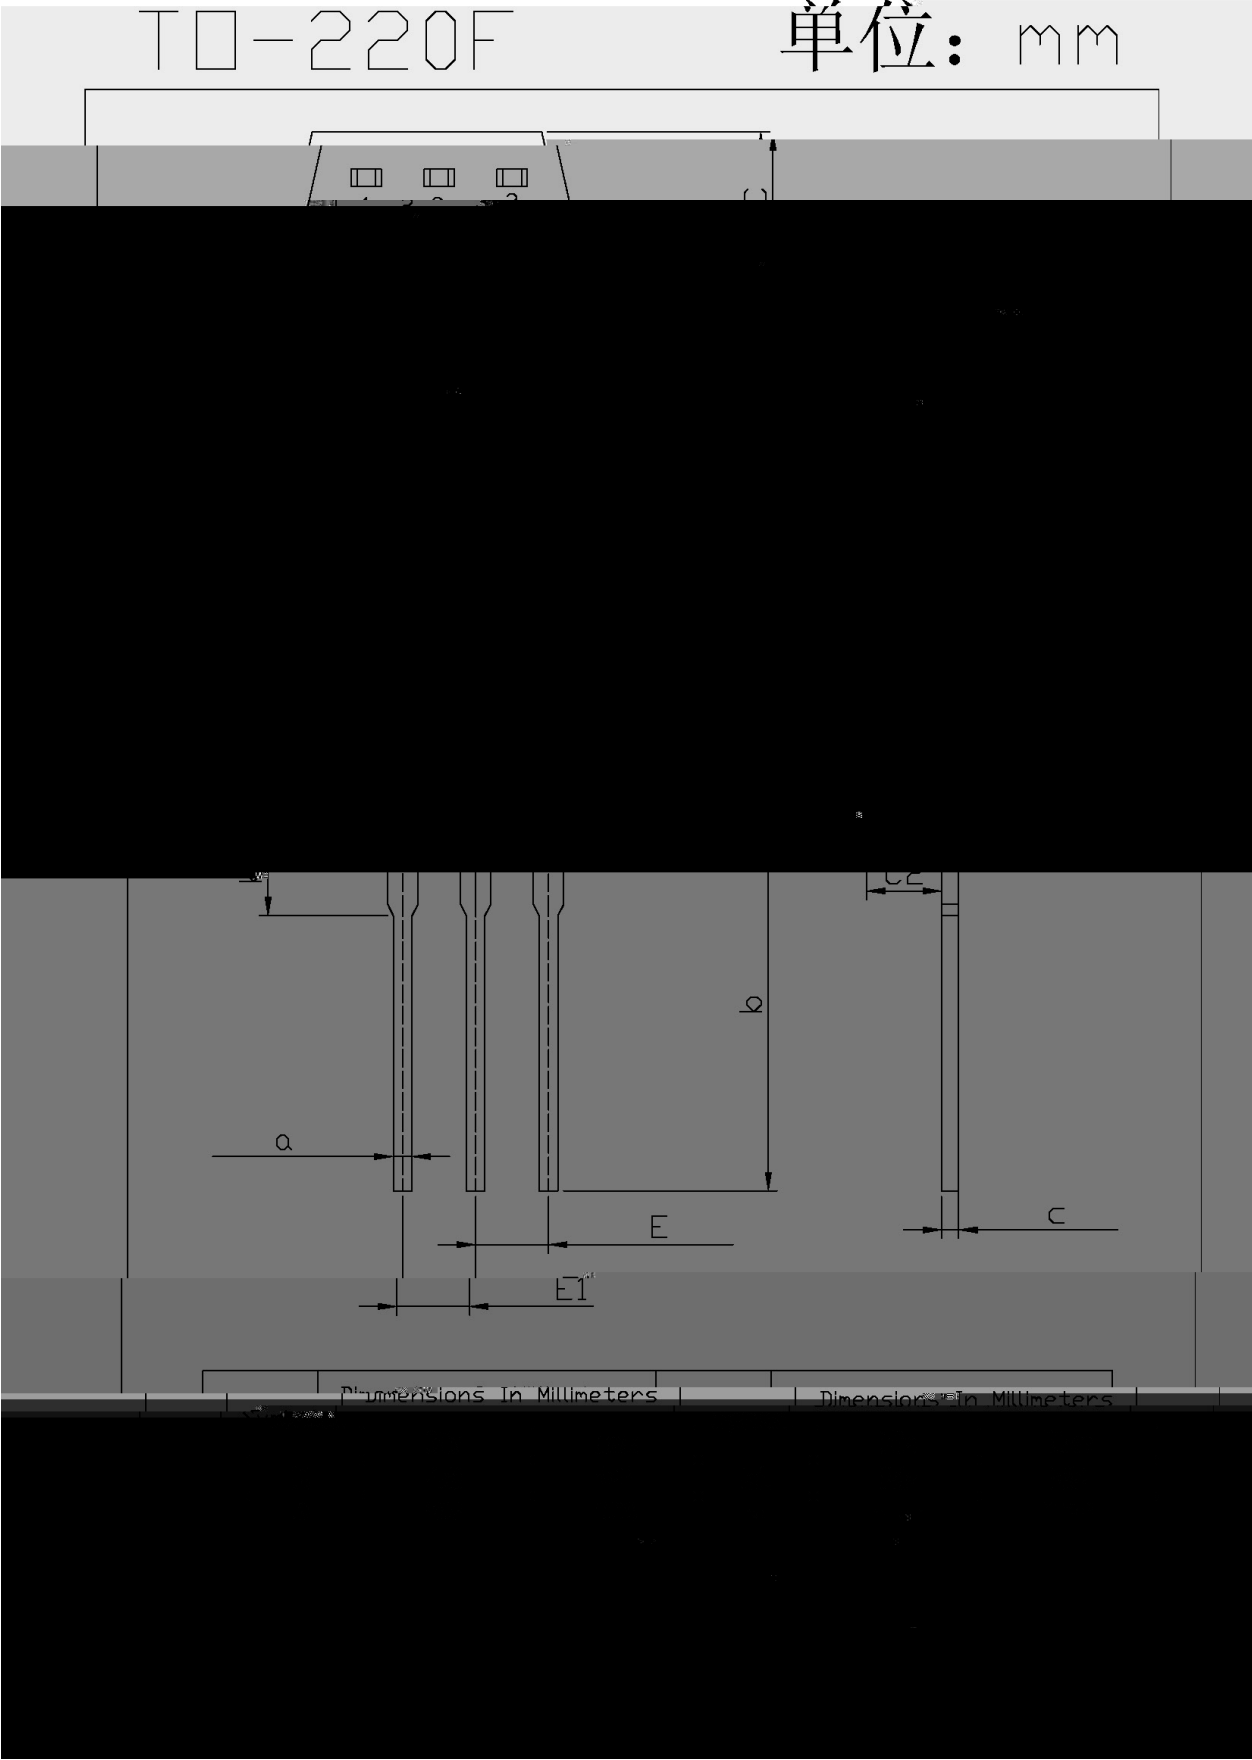


/ Marking Instructions

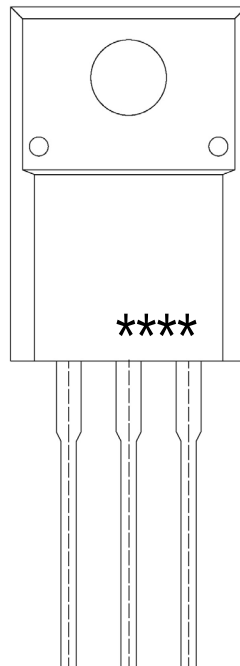

BR

: ;43I

() / Temperature Profile for Dip Soldering(Pb-Free)

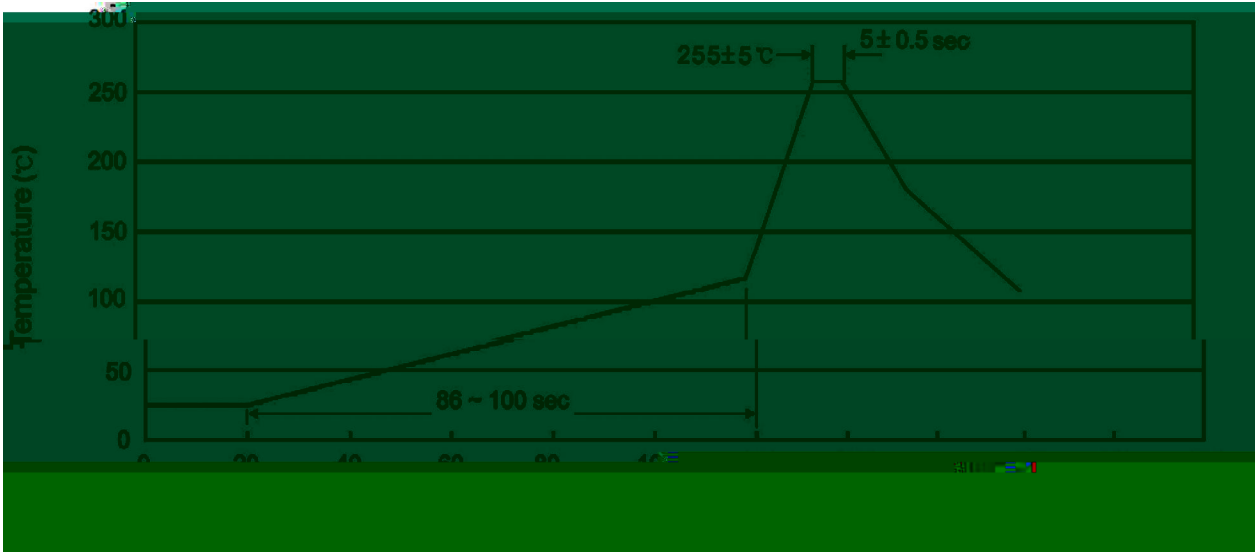

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ± °C

/ Packaging SPEC.

封装形式	包装数量				包装尺寸	:
	Units/Bag 只/袋	Bags/Inner Box 袋/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱		