


/ Descriptions

/ Features

1.5A,

/ Applications

/ Equivalent Circuit or Application Circuit

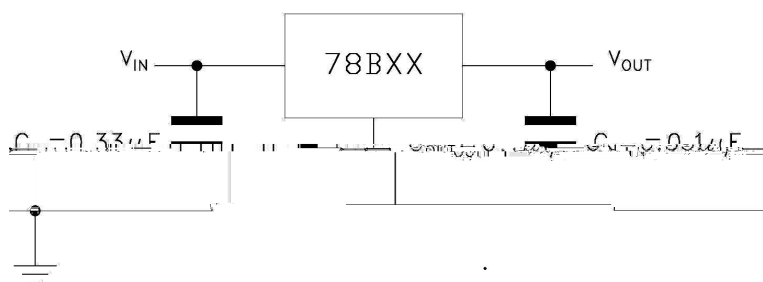

/ Pinning



/ Marking


/ Absolute Maximum Ratings(Ta=25)

	θ		
	θ		


/ Electrical Characteristics(Ta=25 Vi=10V,Io=500mA unless otherwise specified)

		≡				
						μ
						Ω

/ Electrical Characteristic Curve

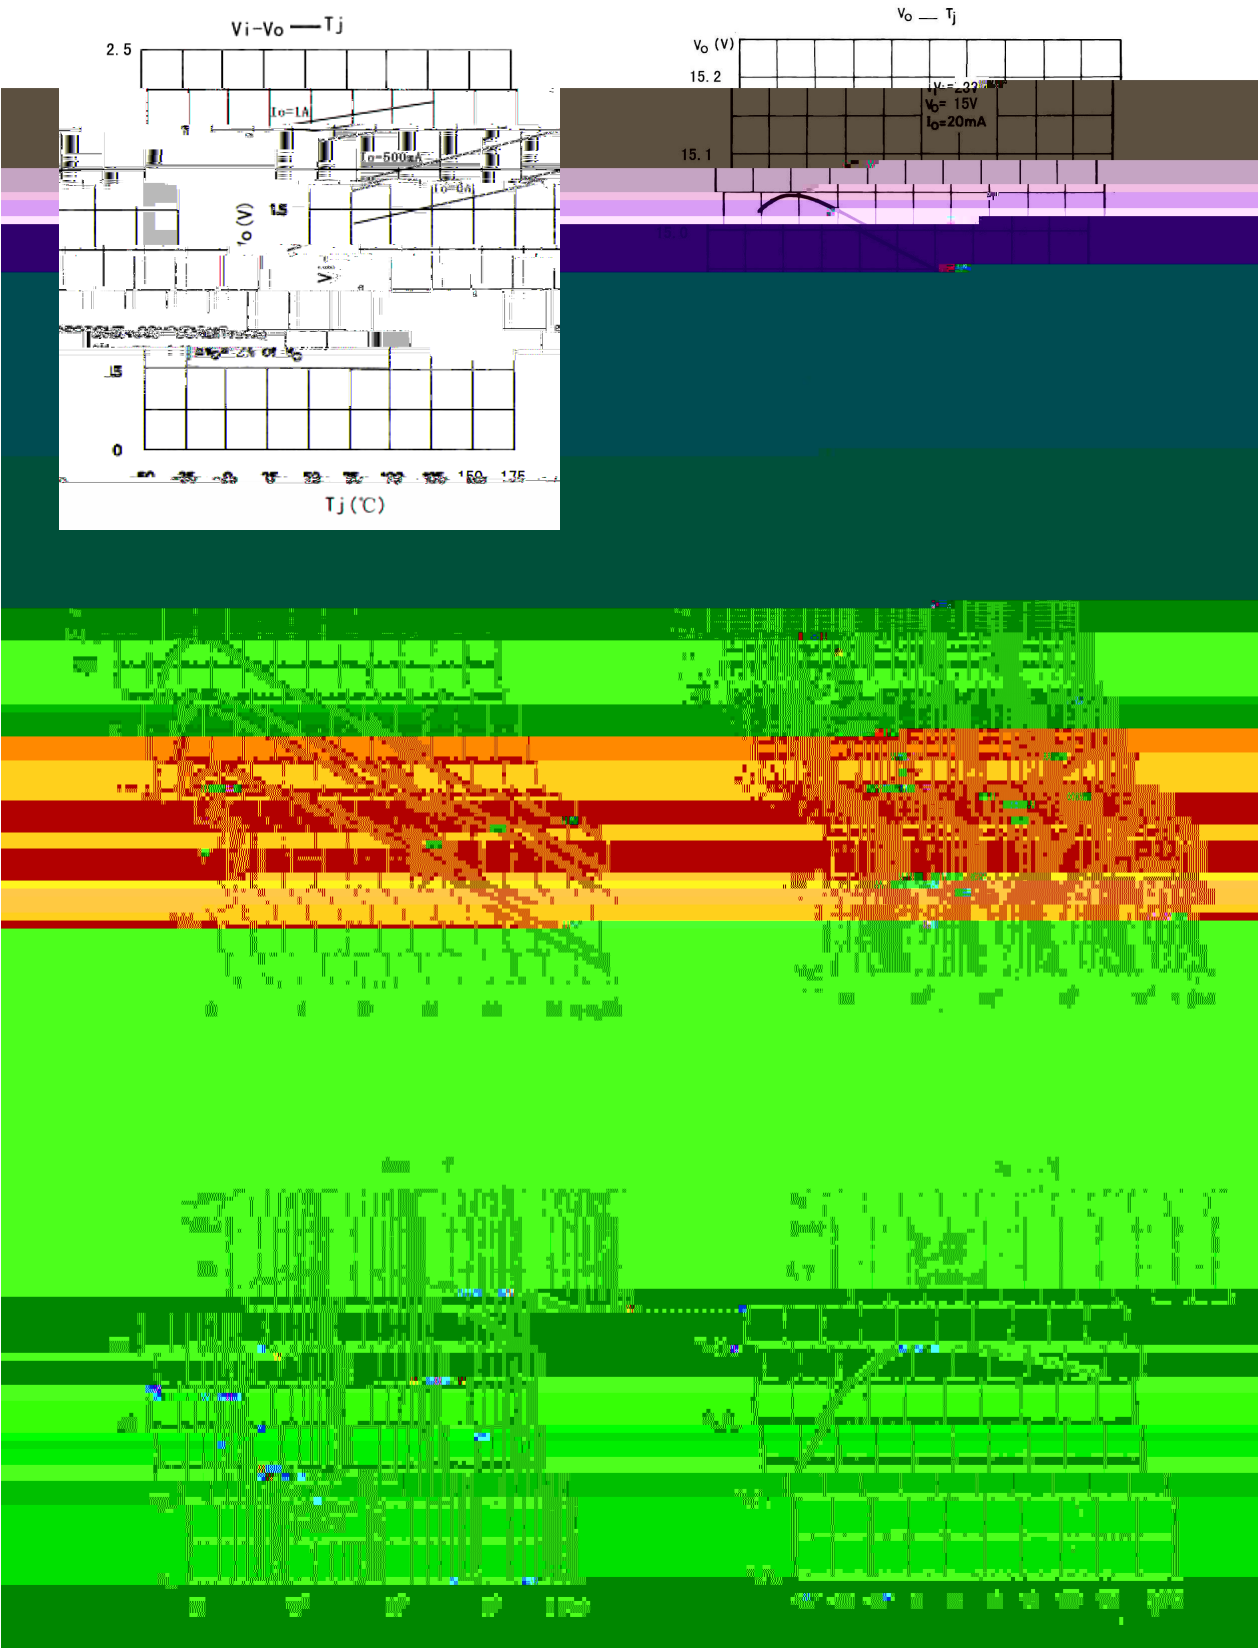


/ Package Dimensions

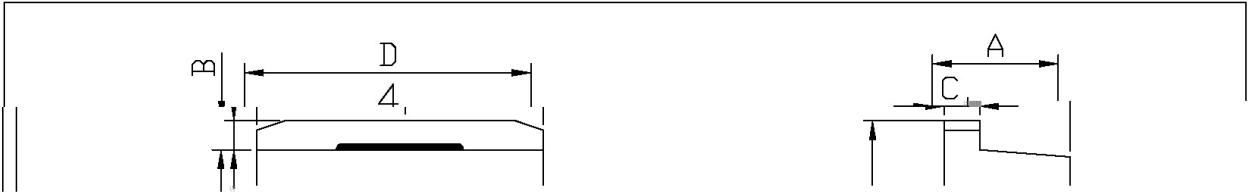

单位: mm							
Dimensions in Millimeters		Symbol		Dimensions in Millimeters		Symbol	
Max			Min	Max			Min
9.40		A	4.30	4.70		E	9.00
2.74		B	1.00	1.40		e1	2.34
5.28		b	0.70	0.90		e2	4.88
16.00		b1	1.15	1.35		L1	15.00


/ Marking Instructions

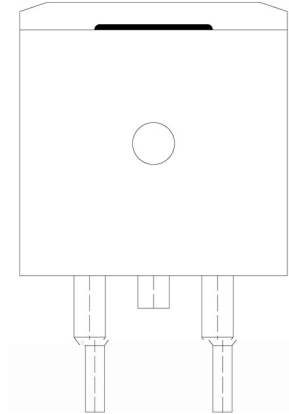

BR

78B15

() /

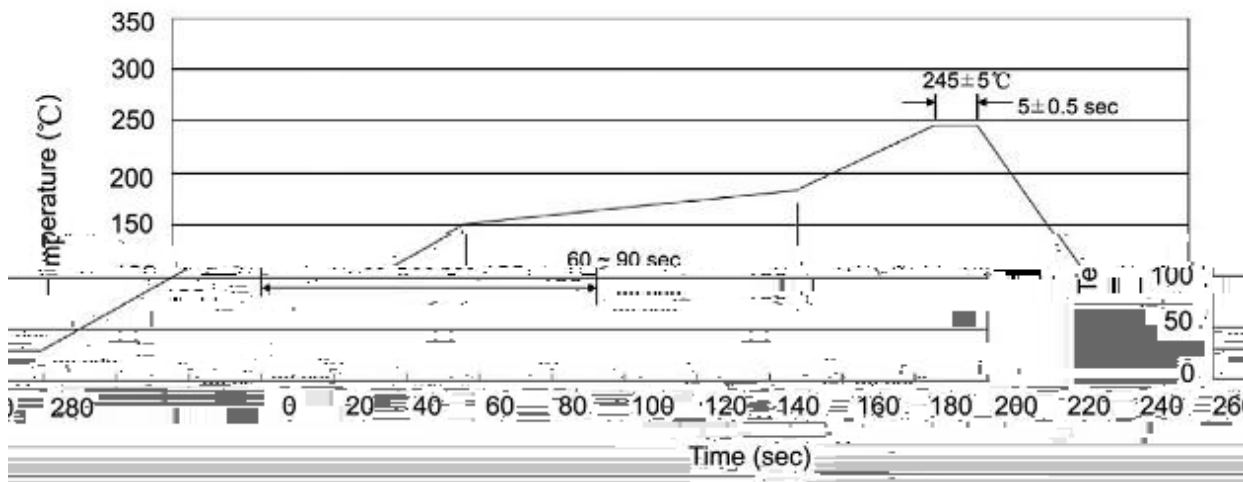

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	只 卷盘	卷盘 盒	只 盒	盒 箱	只 箱		盒	箱

封装形式	包装数量					包装尺寸		
	只 套管	套管 盒	只 盒	盒 箱	只 箱	套管	盒	箱

/ Notices