


/ Descriptions

/ Features

/ Applications

/ / Equivalent Circuit or Application Circuit

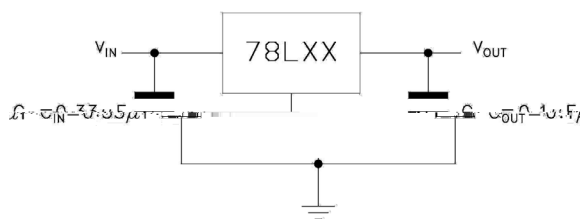

/ Pinning



/ Marking







/ Absolute Maximum Ratings(Ta=25)

		~	℃
		~	℃


/ Electrical Characteristics(Ta=25 Vi=11V,Io=40mA unless otherwise specified)

		=	℃			
	Δ		℃			
			℃			
			℃			
	Δ		℃			
			℃			
			℃			μ
			℃			
			℃			
			℃			
	Δ					

/ Electrical Characteristic Curve

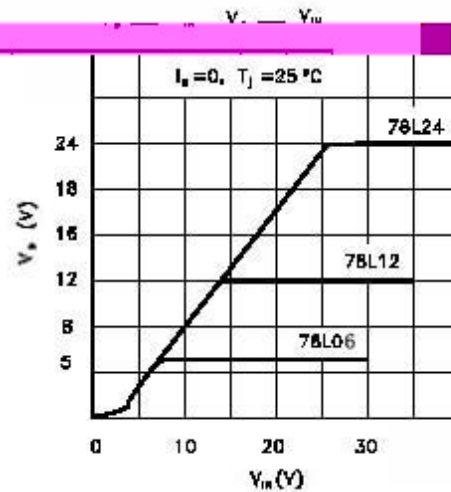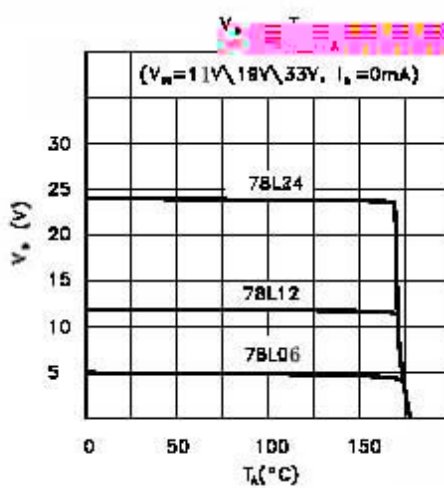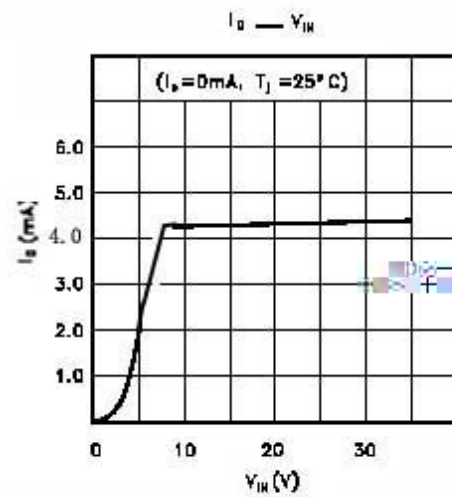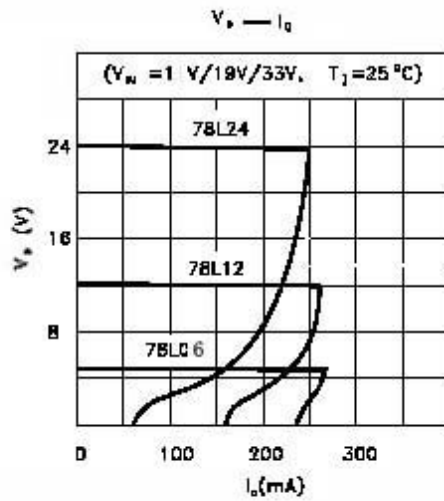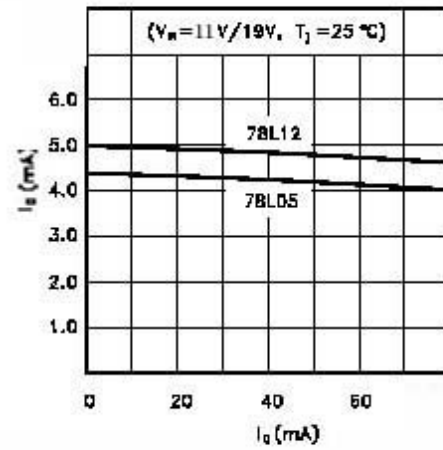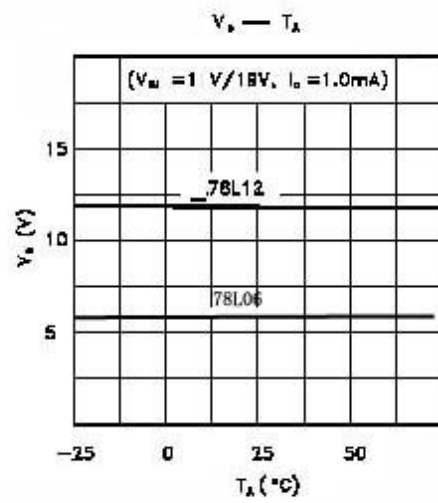

/ Marking Instructions

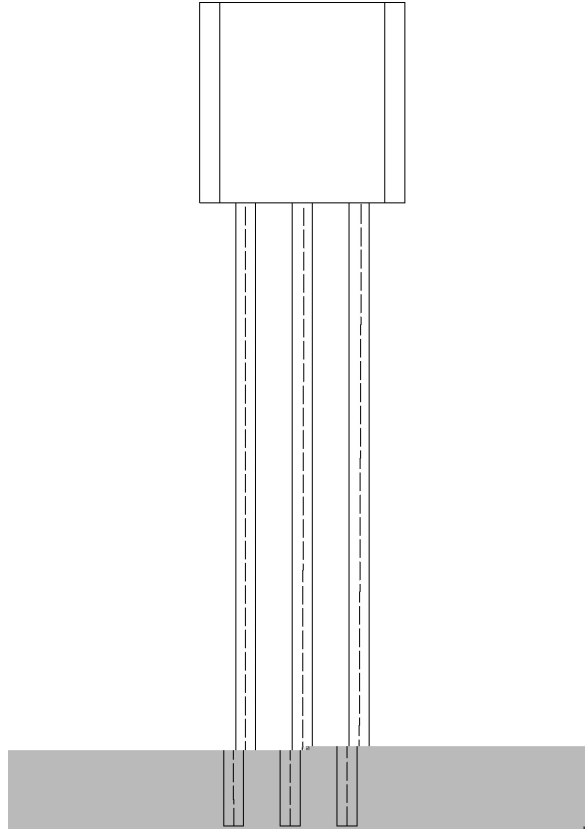

() / Temperature Profile for Dip Soldering(Pb-Free)

/ Resistance to Soldering Heat Test Conditions

°C

/ Packaging SPEC.

	Units/Bag /	Bags/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Bag	Inner Box	Outer Box
TO-92	1,000	10	10,000	5	50,000	135×190	237×172×102	560×245×195
	1,000	10	10,000	10	100,000	135×190	237×172×102	560×245×375

	Units/tape /	Tape/Inner Box /	Rows/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Inner Box	Outer Box
TO-92	3,000	1	120	10	30,000	328×230×42	480×346×235 547×407×268

/ Notices