


/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit or Application Circuit

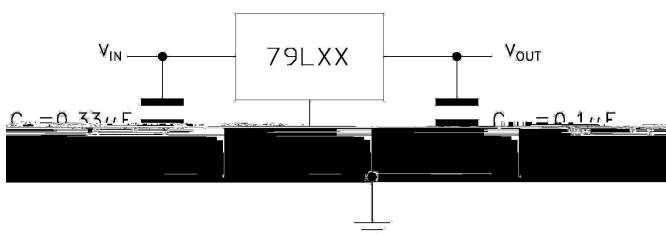

/ Pinning

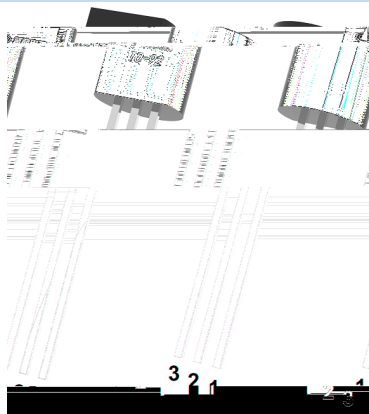


/ Marking

/ Absolute Maximum Ratings(Ta=25)

/ Electrical Characteristics(Ta=25)

		≤ ≤				
		≤ ≤				
		≤ ≤				
		≤ ≤				
		≤ ≤				
		≤ ≤				
		≤ ≤				
		≤ ≤				μ
		≤ ≤				


/ Electrical Characteristic Curve

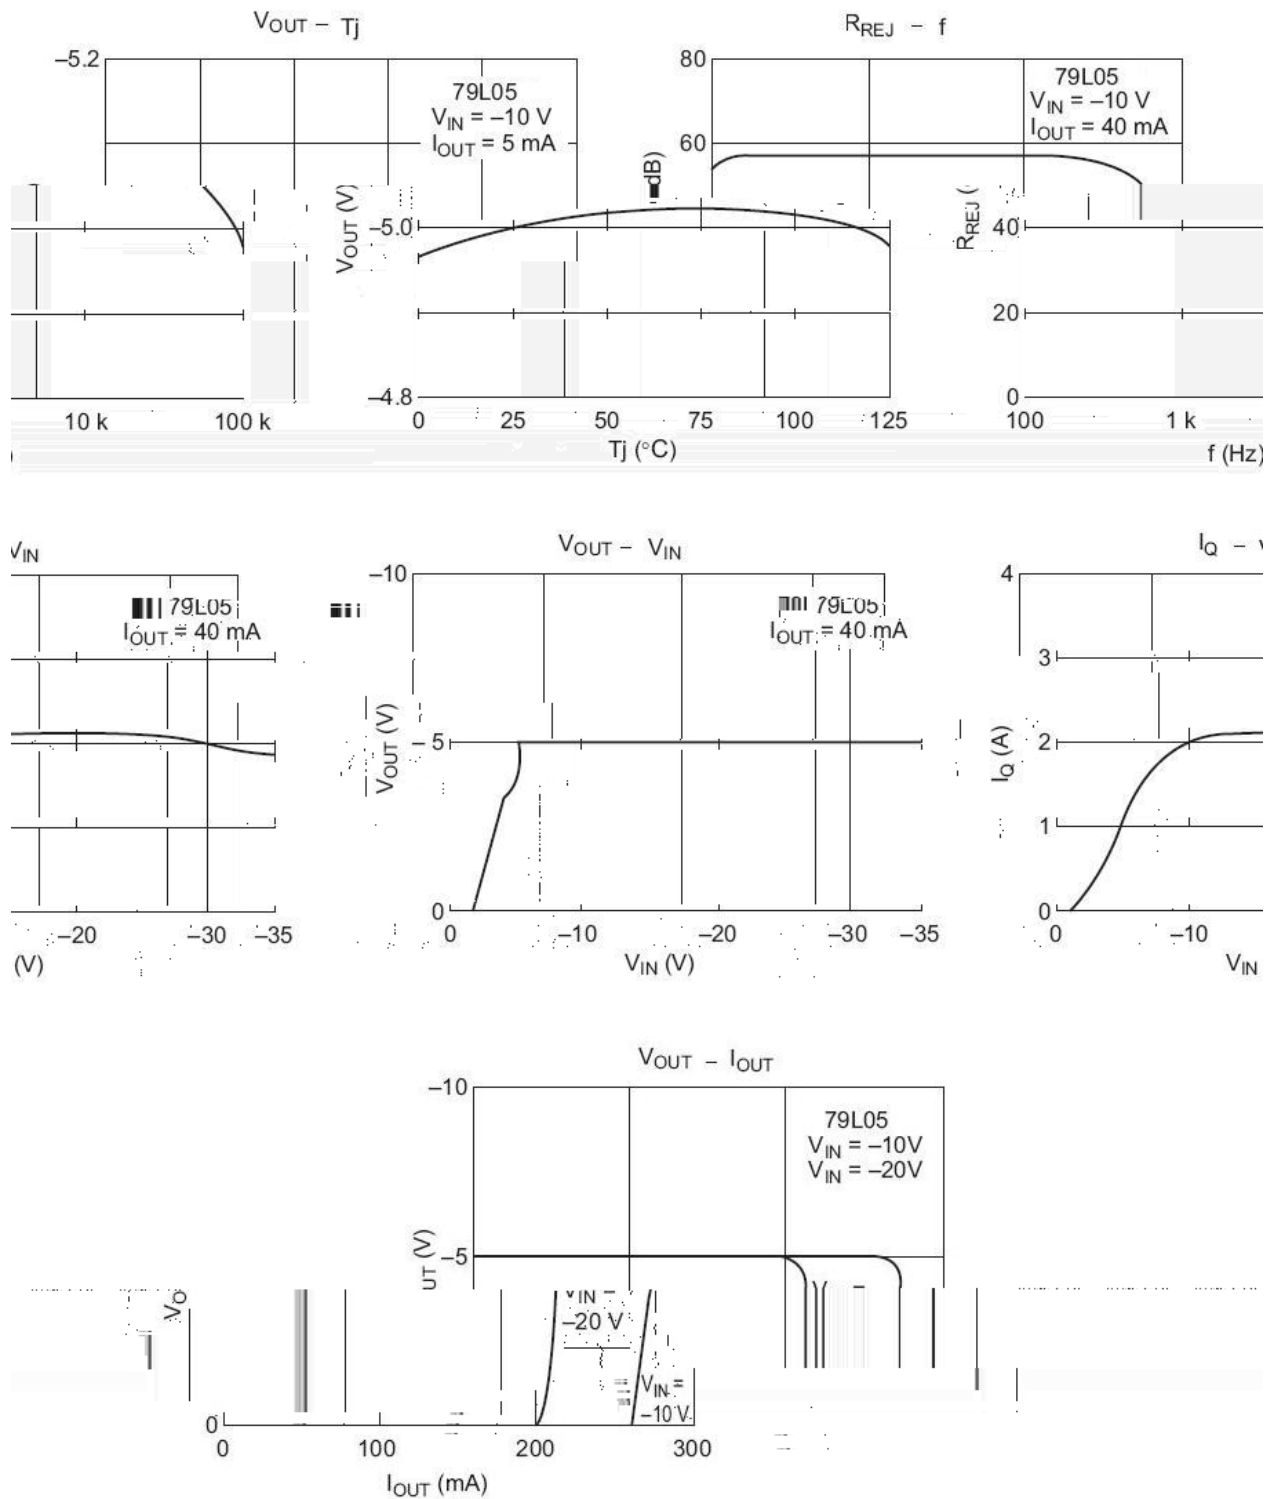


/ Package Dimensions

TO-92

Unit: mm

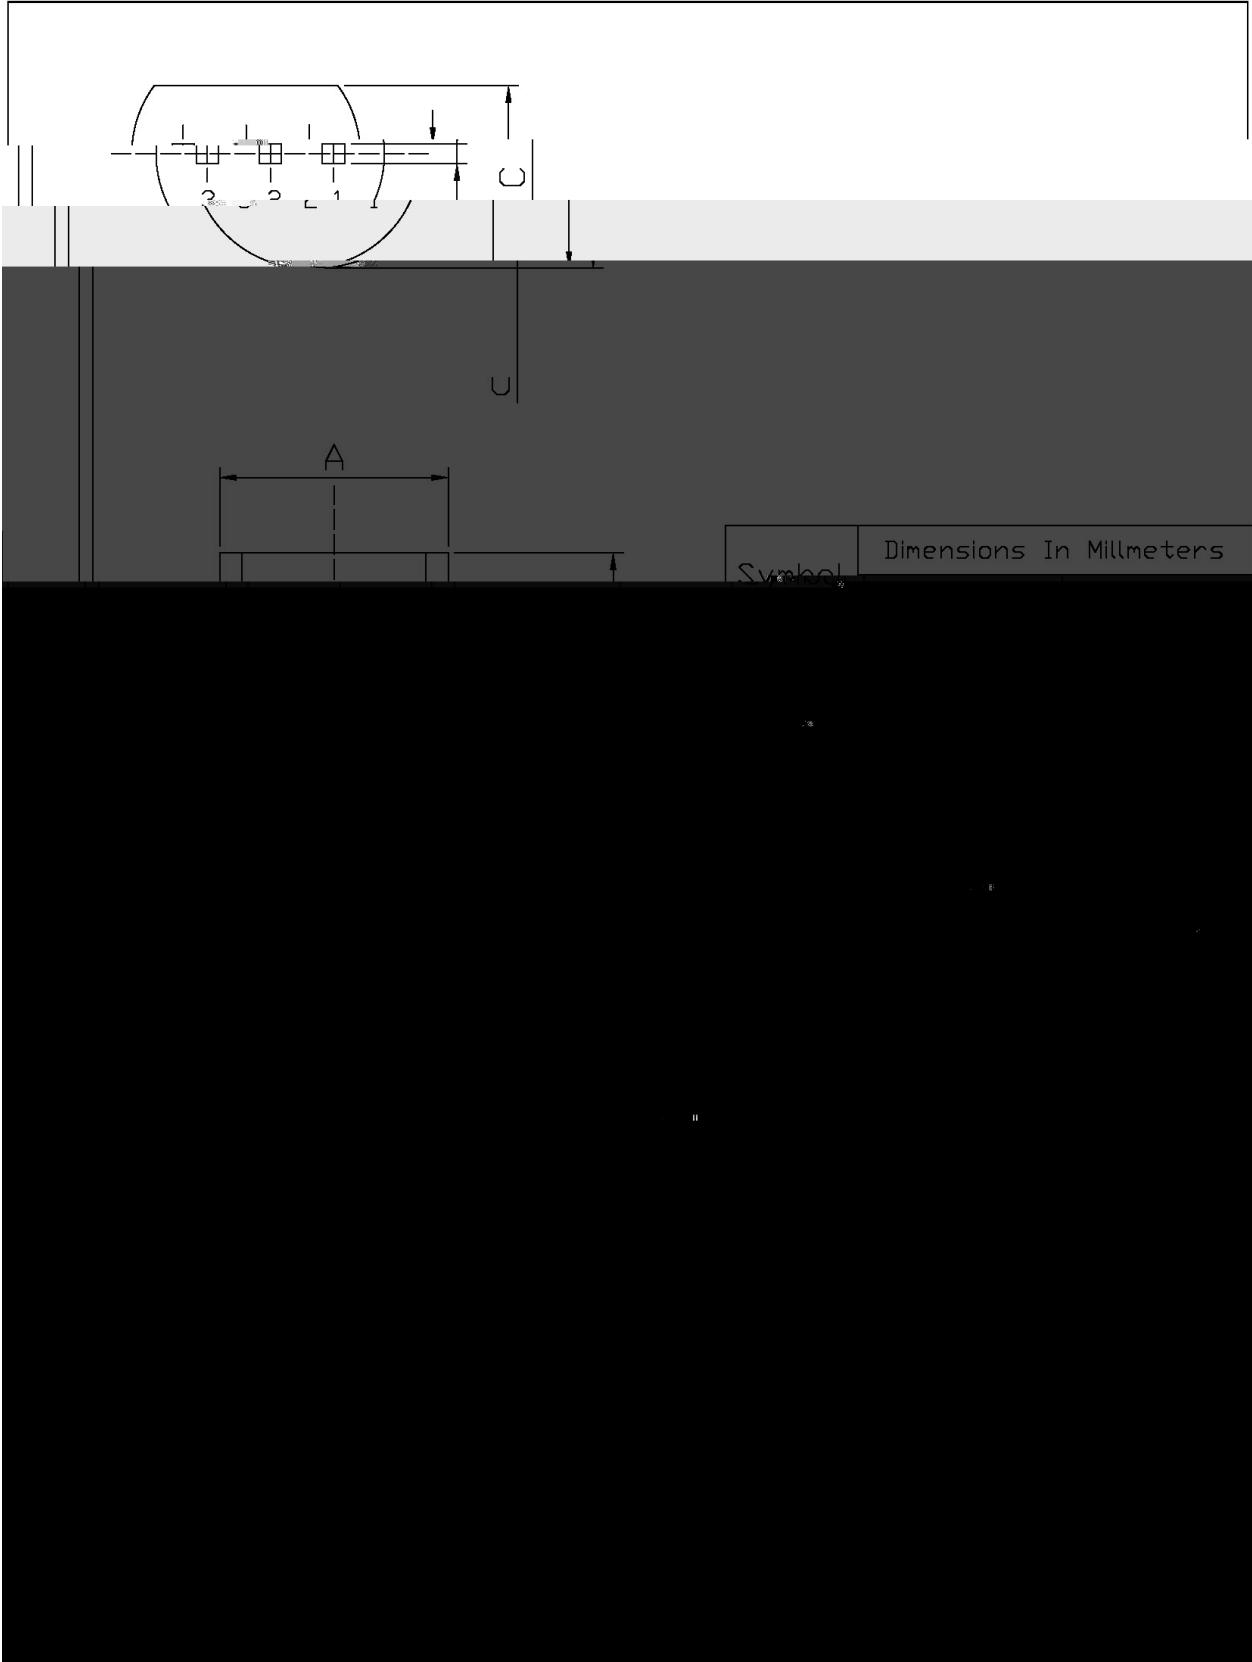

/ Marking Instructions

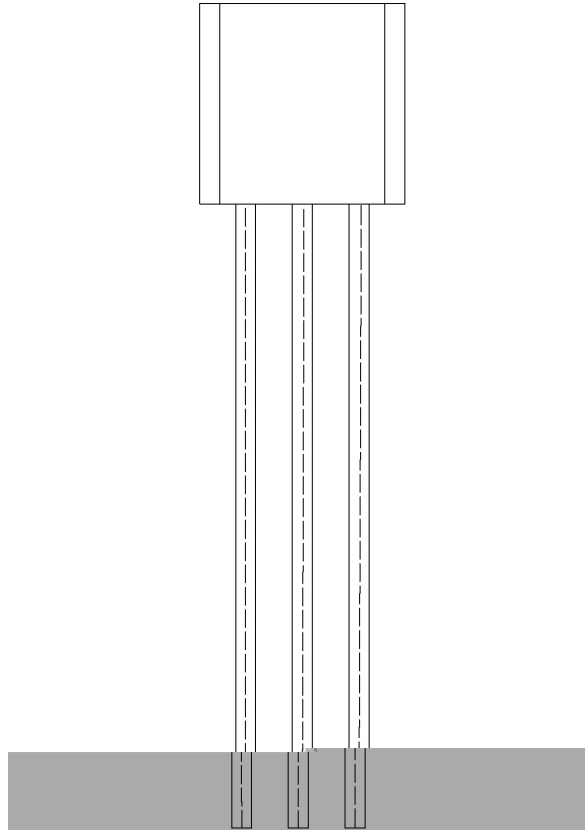

() / Temperature Profile for Dip Soldering(Pb-Free)

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

	Units/Bag /	Bags/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Bag	Inner Box	Outer Box

	Units/tape /	Tape/Inner Box /	
--	-----------------	---------------------	--