

BAT46W



/ Absolute Maximum Ratings(Ta=25)

/ Electrical Characteristics(Ta=25)

μ		μ		
				μ

/ Electrical Characteristic Curve

Fig.1 Power Dissipation Curve

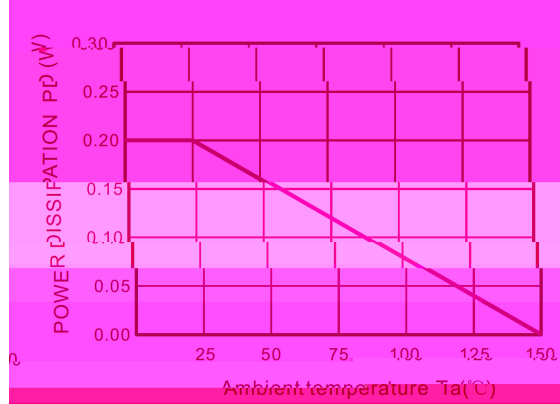


Fig.2 Typical Reverse Current Characteristics

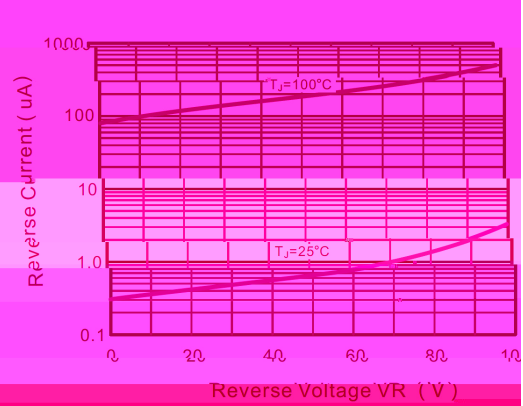


Fig.3 TYPICAL FORWARD VOLTAGE



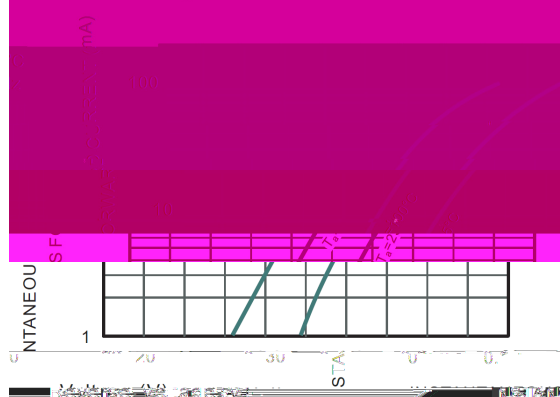


Fig.4 Typical Junction Capacitance

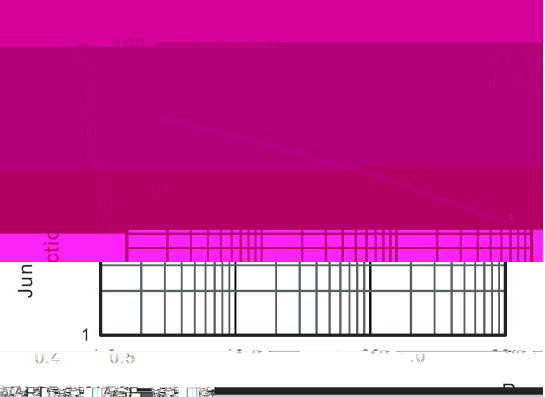


/ Package Dimensions

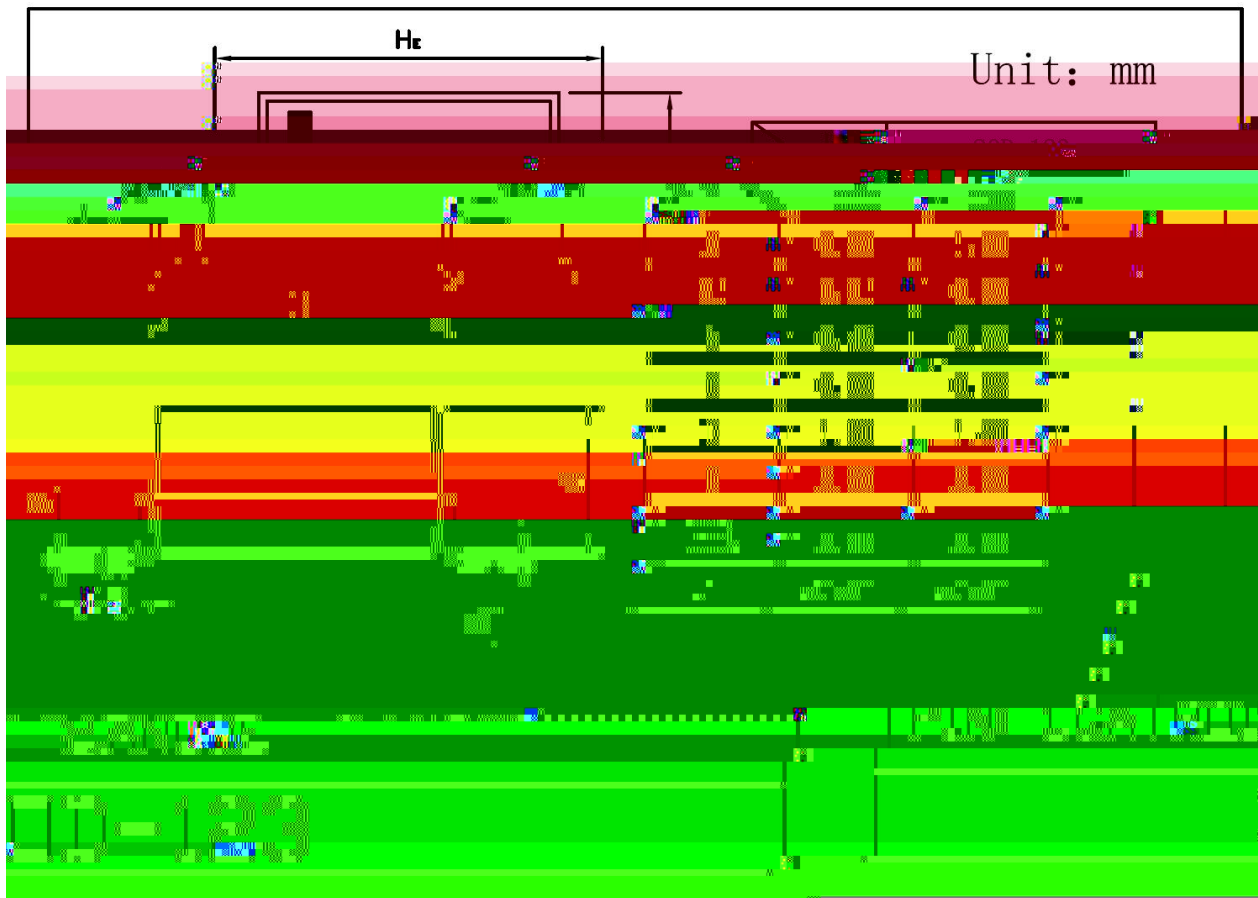

/ Marking Instructions



() /

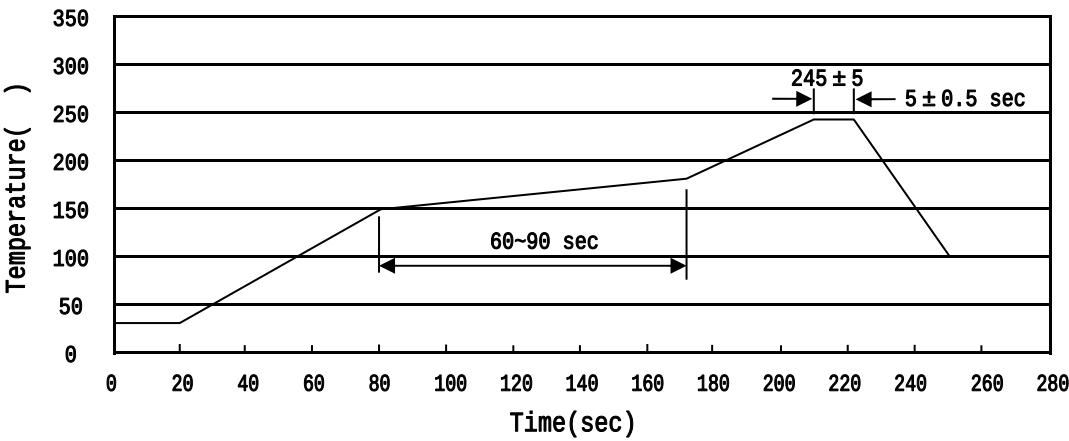

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box

/ Notices