


Silicon PNP transistor in a SOT-323 Plastic Package.

High current, low voltage complementary pair with BC848W.

General purpose switching and amplification.









PIN1 Emitter PIN 2 Base PIN 3 Collector

h_{FE} Classifications	A		B	C
Symbol				
h_{FE} Range	125	250	220 475	420 800
Marking	H3J		H3K	H3L


Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	-30	V
Collector to Emitter Voltage	V_{CEO}	-30	V
Emitter to Base Voltage	V_{EBO}	-5.0	V
Collector Current - Continuous	I_C	-100	mA
Peak Collector Current - Continuous	I_{CM}	-200	mA
Collector Power Dissipation	P_C	200	mW
Junction Temperature	T_j	150	°C
Storage Temperature Range	T_{stg}	-55 150	°C


Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector Cut-Off Current	I_{CBO}	$V_{CB}=-30V$ $I_E=0$			-0.015	μA
Emitter to Base Current	I_{EBO}	$V_{EB}=-5.0V$ $I_C=0$			-0.1	μA
DC Current Gain	h_{FE}	$V_{CE}=-5.0V$ $I_C=-2.0mA$	125		800	
Collector to Emitter Saturation Voltage	$V_{CE(sat)(1)}$	$I_C=-10mA$ $I_B=-0.5mA$		-0.075	-0.3	V
	$V_{CE(sat)(2)}$	$I_C=-100mA$ $I_B=-5.0mA$		-0.25	-0.6	V
Base to Emitter Saturation Voltage	$V_{BE(sat)(1)}$	$I_C=-10mA$ $I_B=-0.5mA$		-0.7		V
	$V_{BE(sat)(2)}$	$I_C=-100mA$ $I_B=-5.0mA$		-0.85		V
Base to Emitter Voltage	$V_{BE(1)}$	$V_{CE}=-5.0V$ $I_C=-2.0mA$	-0.6	-0.65	-0.75	V
	$V_{BE(2)}$	$V_{CE}=-5.0V$ $I_C=-10mA$			-0.82	V
Transition Frequency	f_T	$V_{CE}=-5.0V$ $I_C=-10mA$ $f=100MHz$	100			MHz
Collector Capacitance	C_C	$V_{CB}=-10V$ $I_E=I_C=0$ $f=1.0MHz$			3.0	pF
Emitter Capacitance	C_e	$V_{EB}=-0.5V$ $I_C=I_E=0$ $f=1.0MHz$			12	pF
Noise Figure	NF	$I_C=-200\mu A$ $V_{CE}=-5.0V$ $R_S=2K\Omega$ $B=200Hz$ $f=1.0KHz$			10	dB

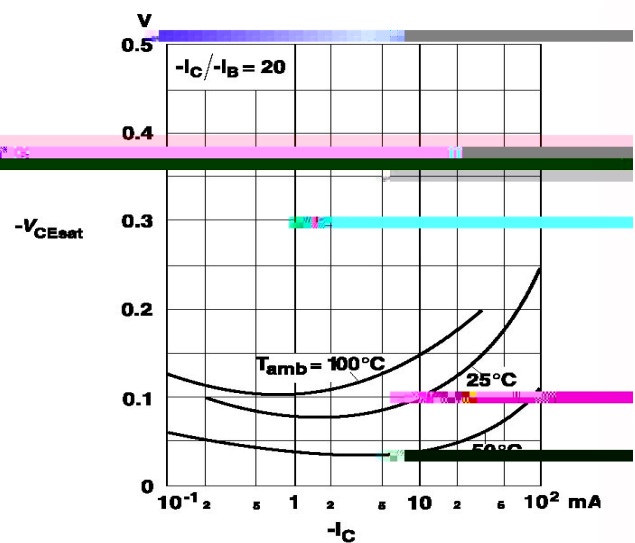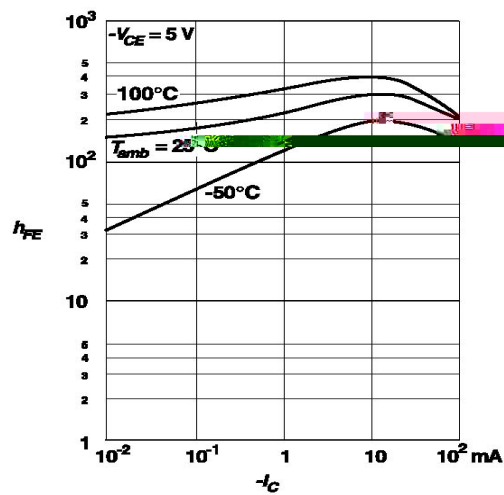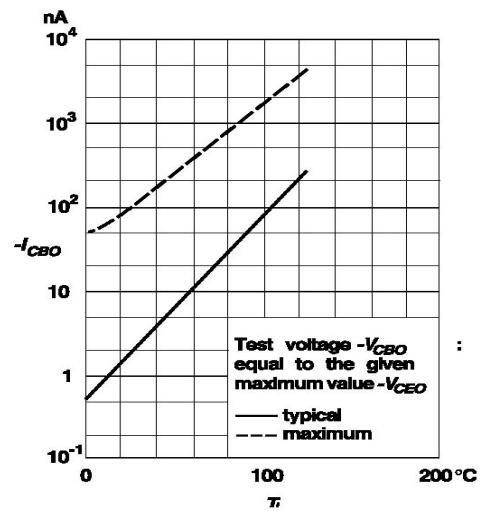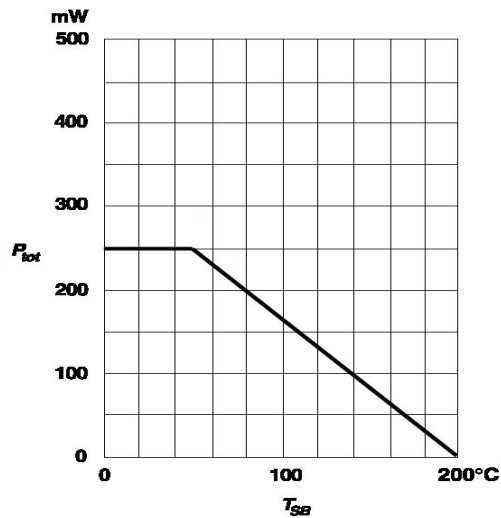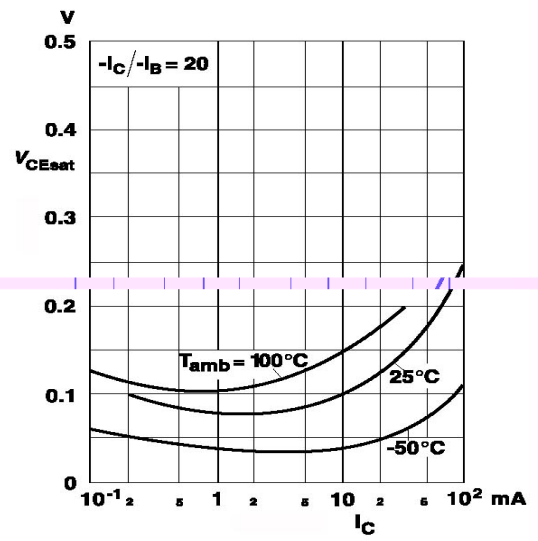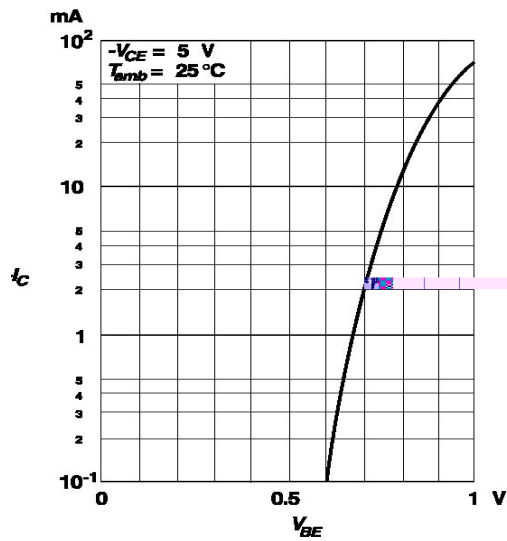

SOT-323

单位; mm

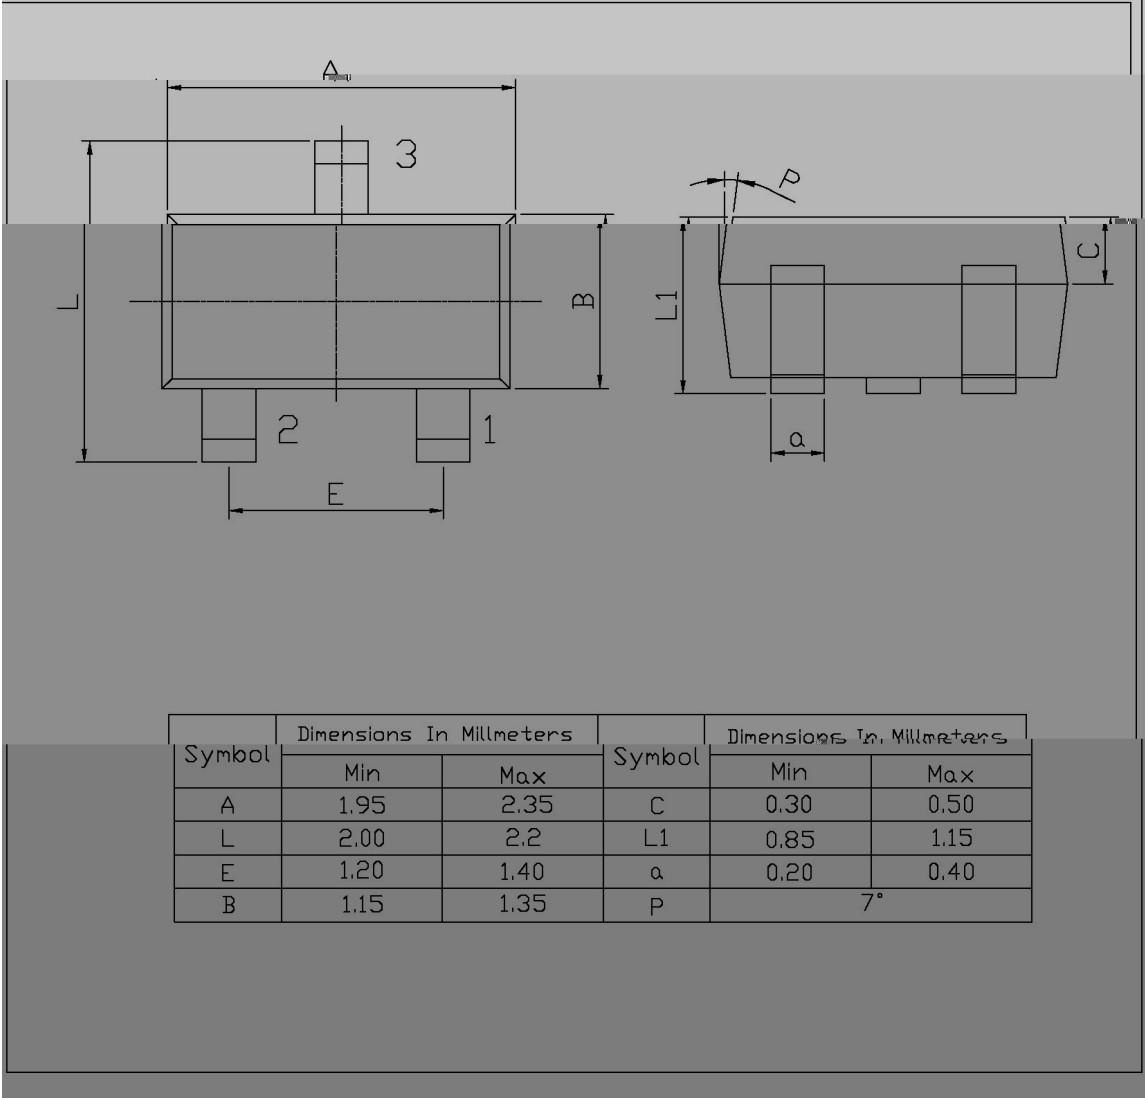

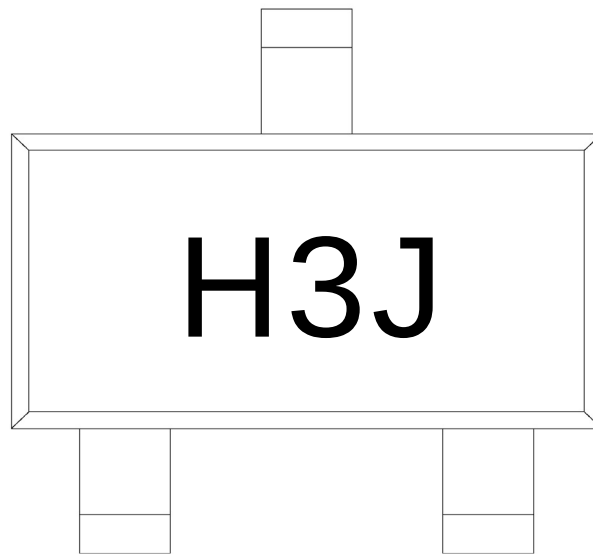


H

3J

Note:

H: Company Code.

3J: Product Type.

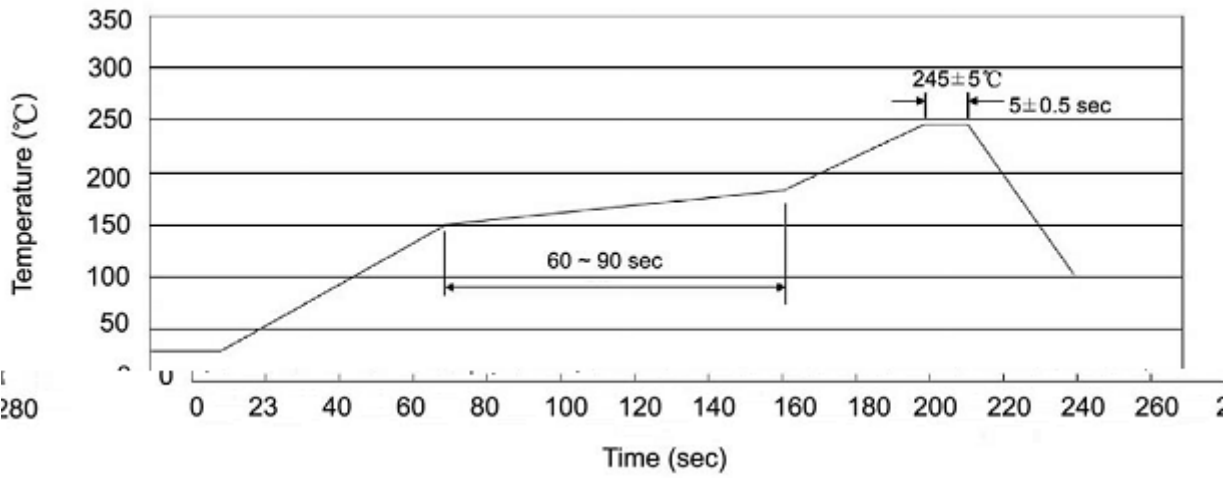

Note:

- 1

25 150

60 90sec;

1.Preheating:25~150 , Time:60~90sec.
- 2

245 5

5 0.5sec;

2.Peak Temp.:245 5 , Duration:5 0.5sec.
- 3

2 10 /sec.

3. Cooling Speed: 2~10 /sec.

260 5

10 1 sec.

Temp.:260±5°C

Time:10±1 sec

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-323	3,000	10	30,000	6	180,000	7 ×8	180×120×180	390×385×205