


/ Descriptions

/ Features

/ Applications

/ Equivalent Circuit



/ Pinning







/ h_{FE} Classifications & Marking

	~

/ Absolute Maximum Ratings(Ta=25)			
			℃
		~	℃

/ Electrical Characteristics(Ta=25)						


I Electrical Characteristic Curve

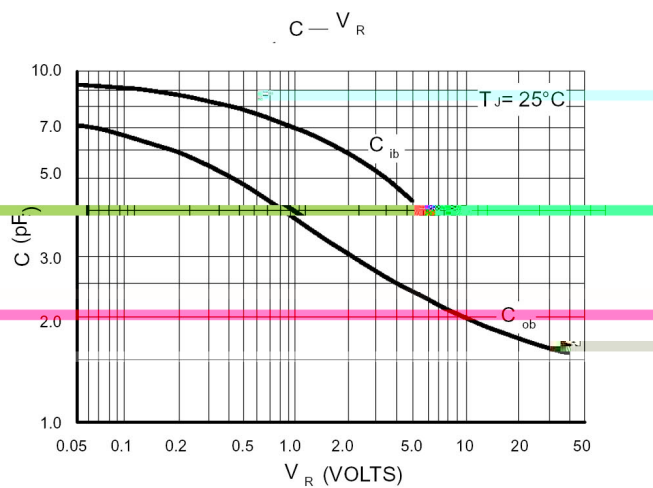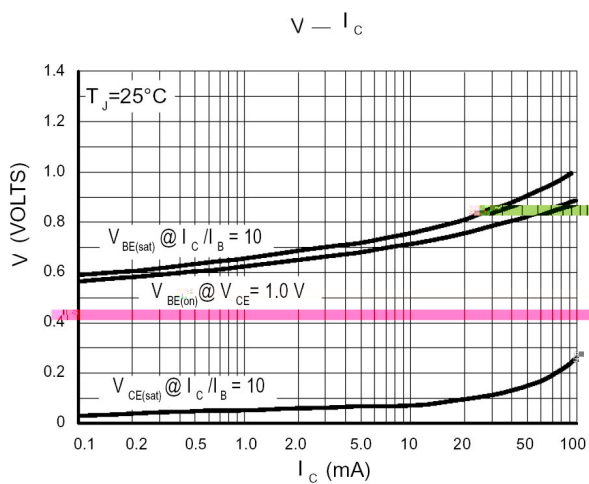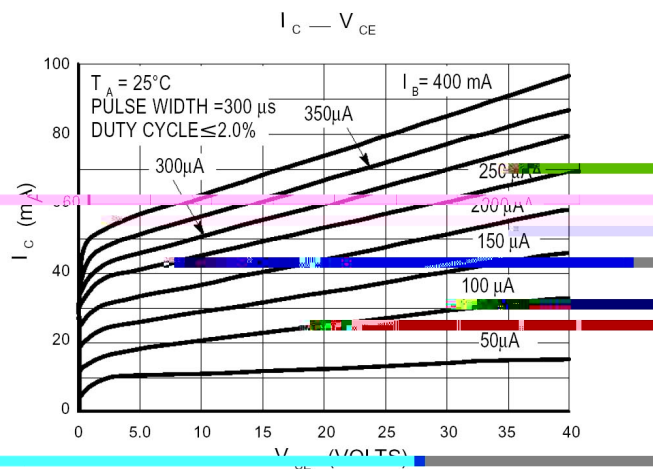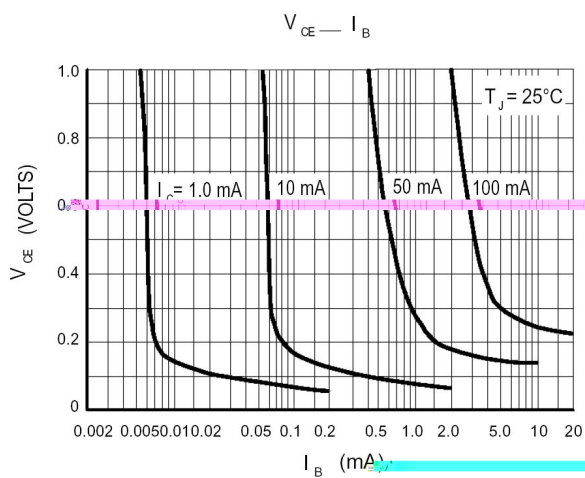


/ Package Dimensions

SOT-23


单位: mm

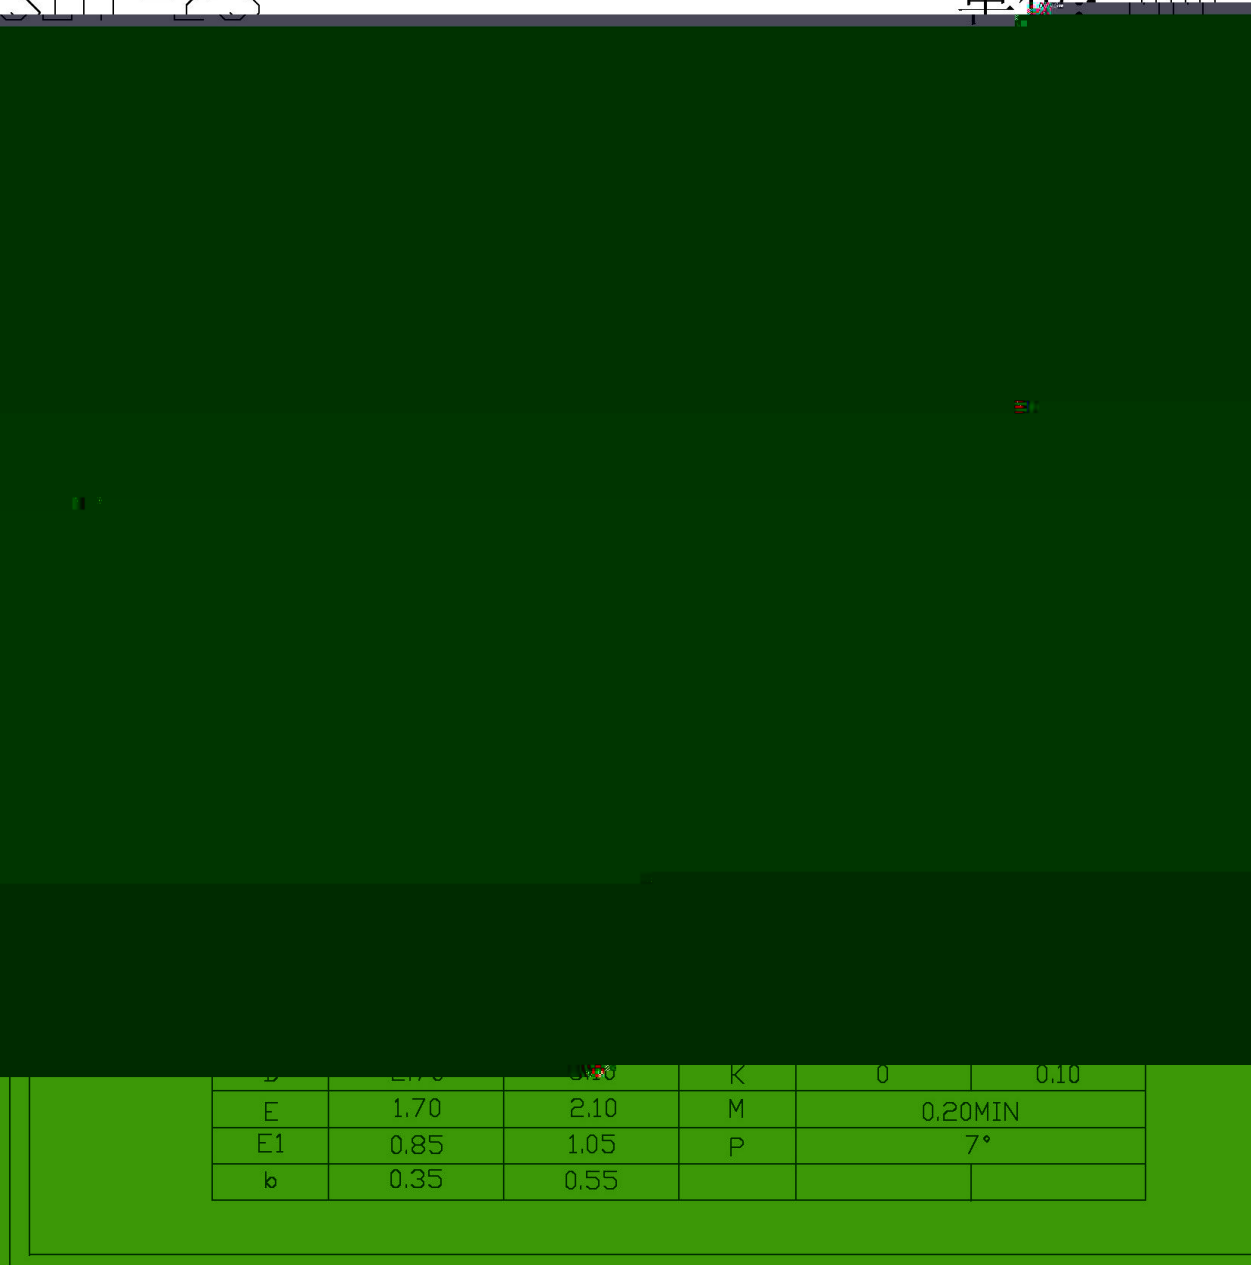

/ Marking Instructions

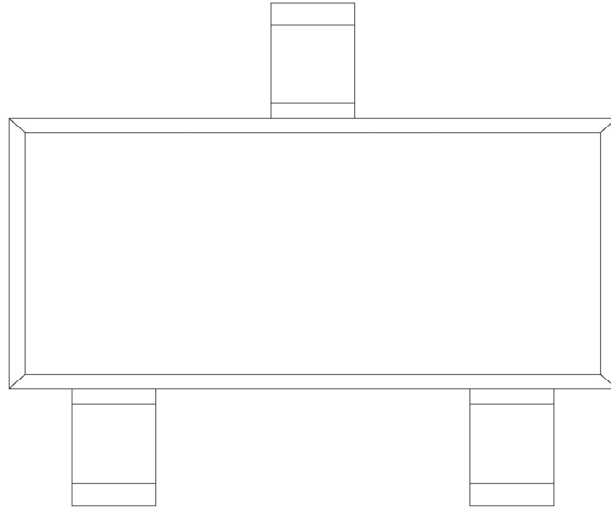

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

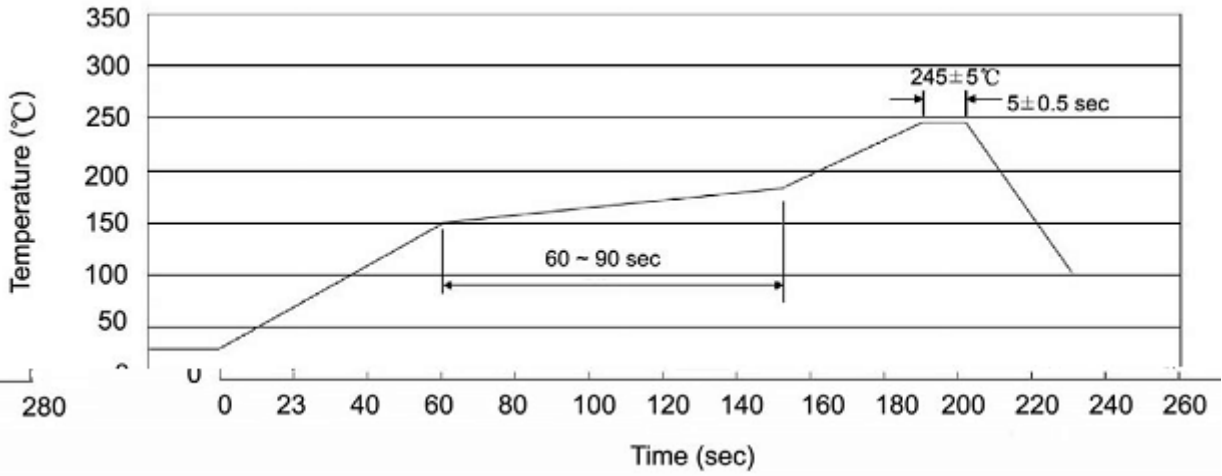

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	只 卷盘	卷盘 盒	只 盒	盒 箱	只 箱		盒	箱
						"		

/ Notices