


描述 / Descriptions

特征 / Features


用途 / Applications

PFC

内部等效电路 / Equivalent Circuit



引脚排列 / Pinning



放大及印章代码 / h_{FE} Classifications & Marking


极限参数 / Absolute Maximum Ratings(Ta=25℃)

	℃		
	℃		
	℃		

电性能参数 / Electrical Characteristics(Ta=25℃)


		μ				
						μ
		℃				μ
						μ
		μ				
						Ω
		Ω				

外形尺寸图 / Package Dimensions




Dimensions in Millimeters			Dimensions in Millimeters		
Symbol	Min	Max	Symbol	Min	Max
A	9.8	10.2	C	1.2	1.4
a	2.56	3.36	D	6.3	6.5
b	15.7	16.1	E	9.02	9.1
b1	12.6	13.6	F	2.2	2.5
c	9.6	10.6	G	0.7	0.8
d	1.2	1.3	H	0.32	0.35
e	1.47	1.5	I	2.38	2.44
f	1.25	1.45	J	1.25	1.45

印章说明 / Marking Instructions

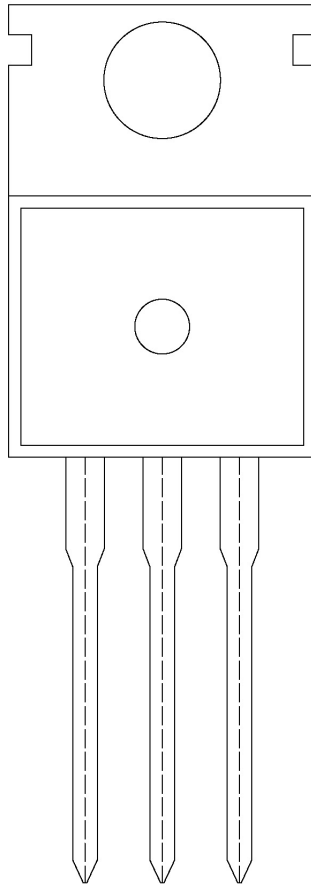

12N60

波峰焊温度曲线图(无铅) / Temperature Profile for Dip Soldering(Pb-Free)

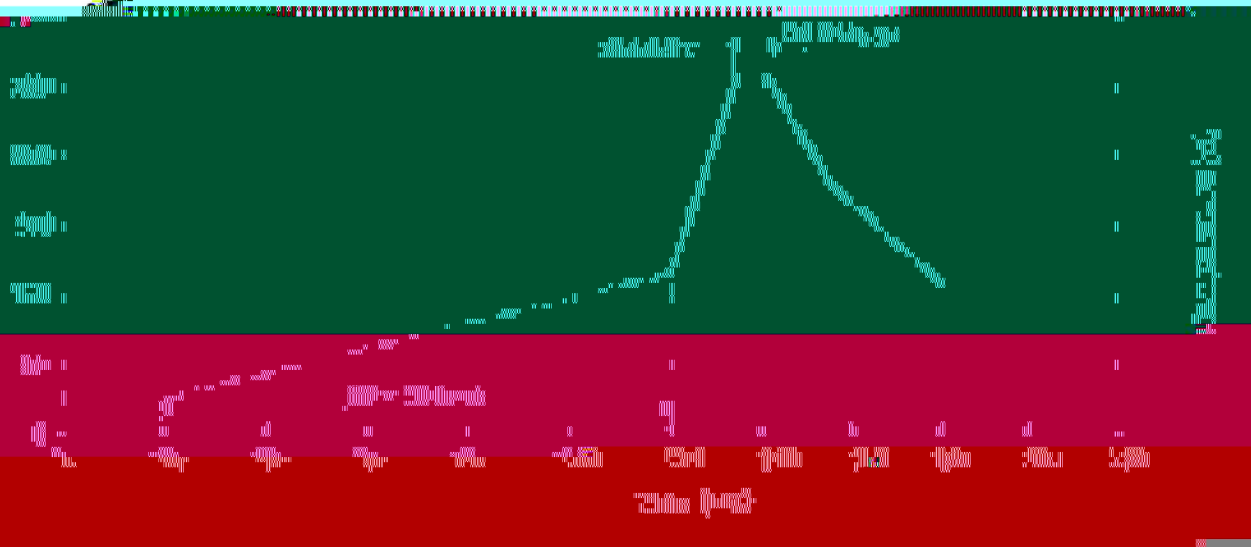

± ± ± ±

耐焊接热试验条件 / Resistance to Soldering Heat Test Conditions

± ±

包装规格 / Packaging SPEC.

封装形式	包装数量					包装尺寸		
	只 袋	袋 盒	只 盒	盒 箱	只 箱	袋	盒	箱

封装形式	包装数量					包装尺寸		
	只 套管	套管 盒	只 盒	盒 箱	只 箱	套管	盒	箱

使用说明 / Notices