


/ Descriptions

/ Features


dv/dt

/ Applications

/ Equivalent Circuit



/ Pinning



/ h_{FE} Classifications & Marking


/ Absolute Maximum Ratings(Ta=25)

			℃
			℃
			℃
			℃


/ Electrical Characteristics(Ta=25)

		μ				
						μ
		μ				
						Ω
		Ω				


/ Electrical Characteristic Curve

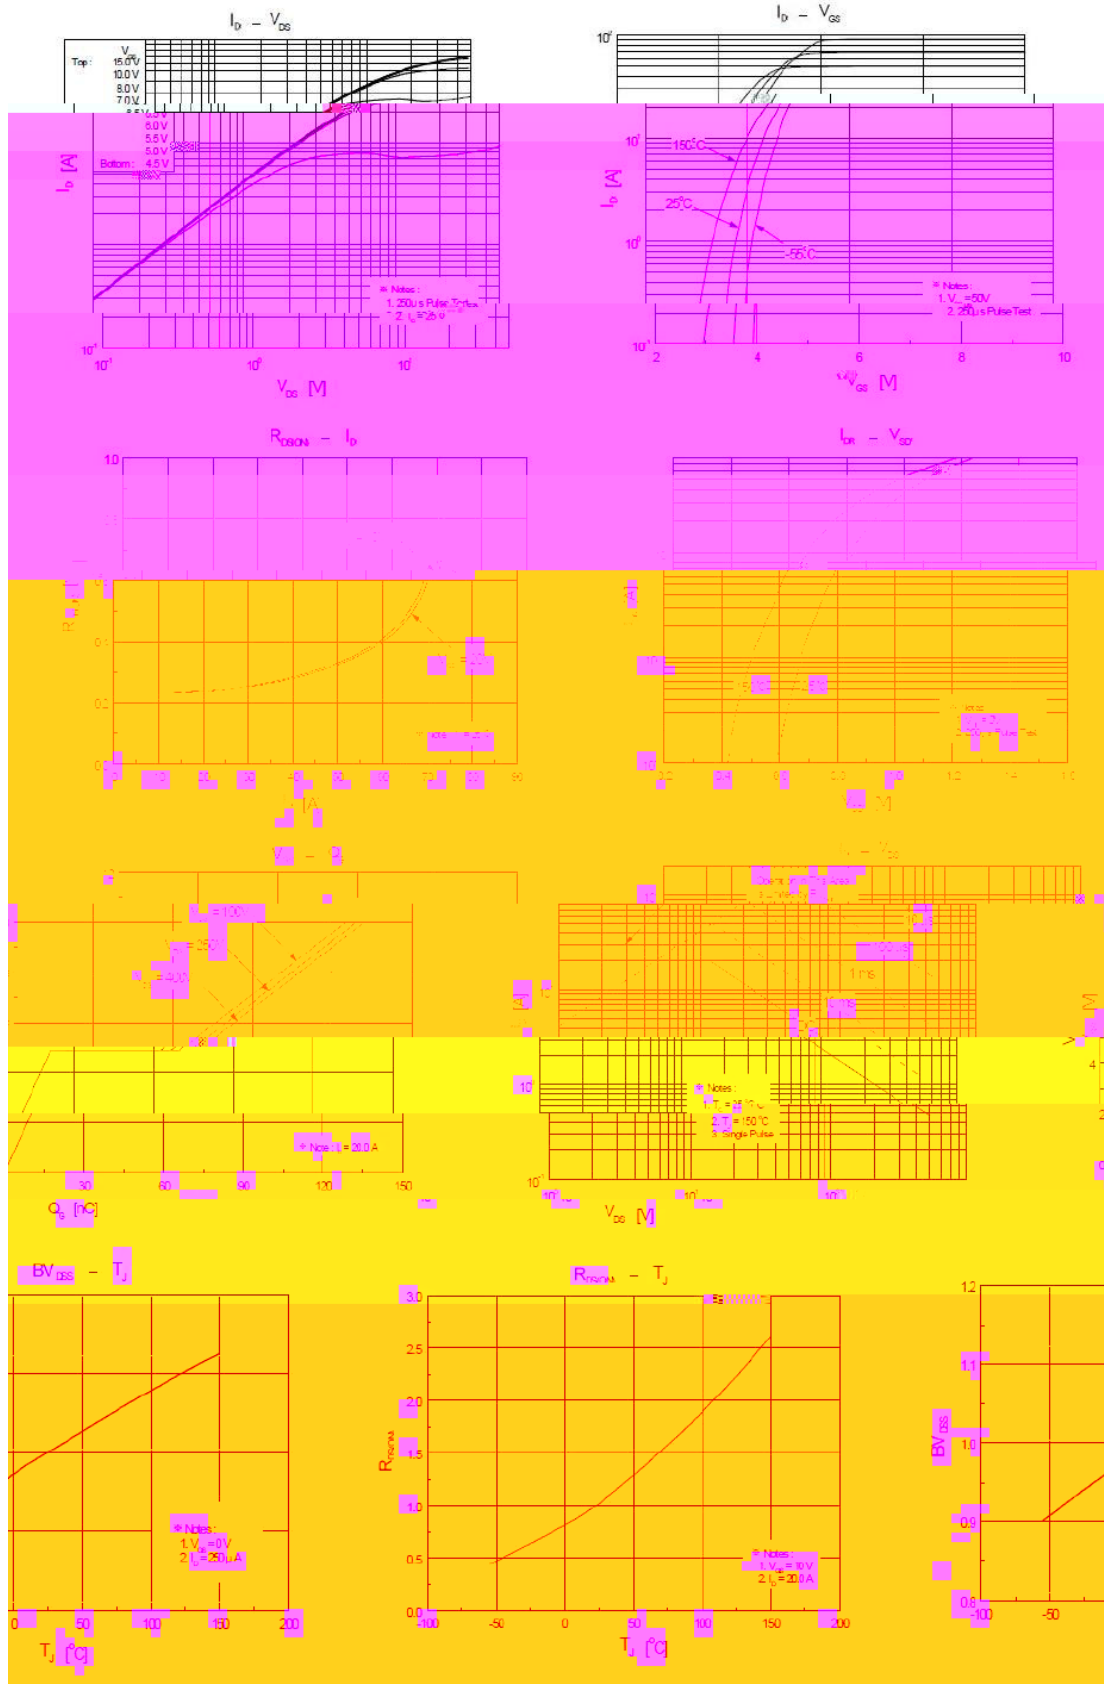

[REDACTED]

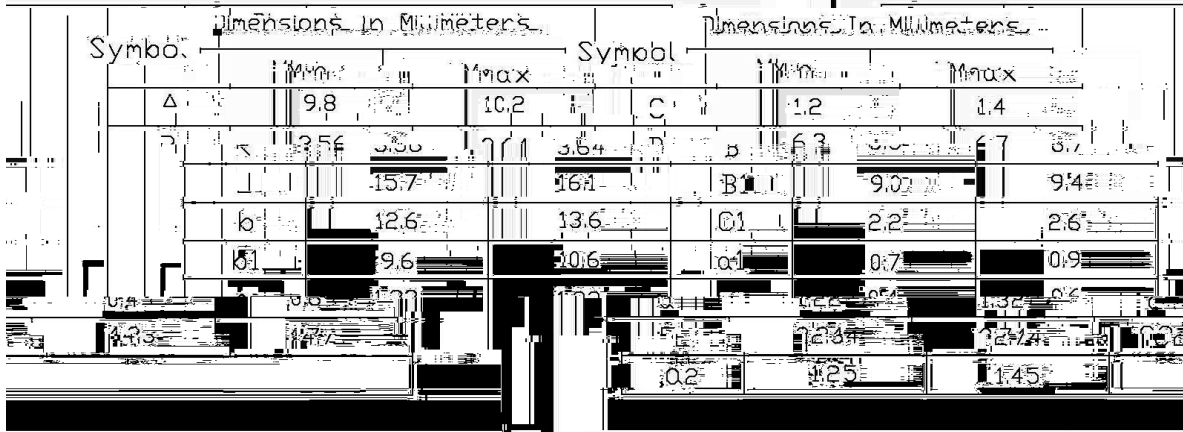


/ Marking Instructions

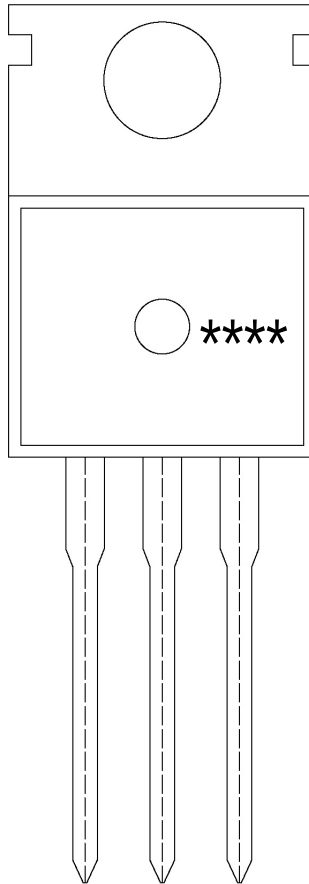

20N40

() / Temperature Profile for Dip Soldering(Pb-Free)

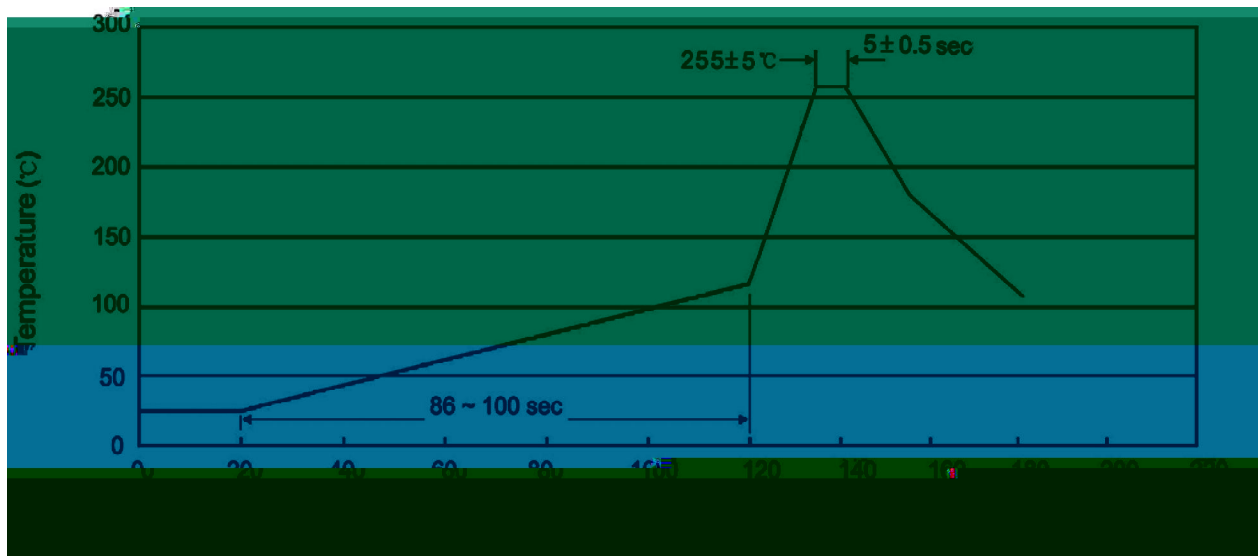 $\pm$ $\pm$ $\pm$ $\pm$

/ Resistance to Soldering Heat Test Conditions

 $\pm$ $\pm$

°C