


/ Descriptions


/ Features

/ Applications

/ / Equivalent Circuit or Application Circuit

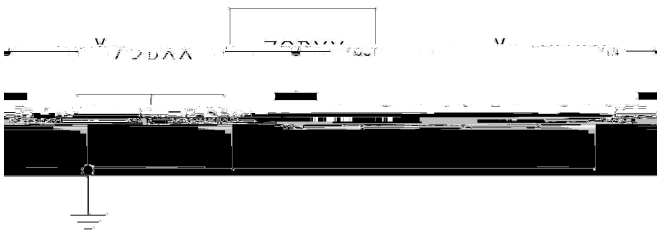

/ Pinning

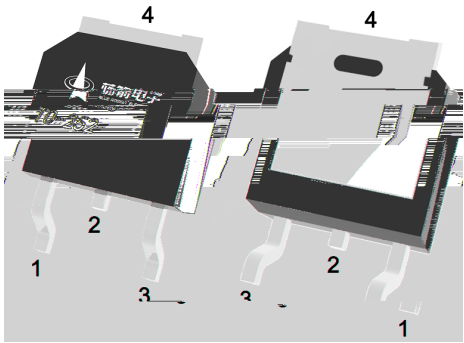

/ Marking



/ Absolute Maximum Ratings(Ta=25)

	θ		
	θ		


/ Electrical Characteristics(Ta=25)

		≤				
						μ

/ Electrical Characteristic Curve

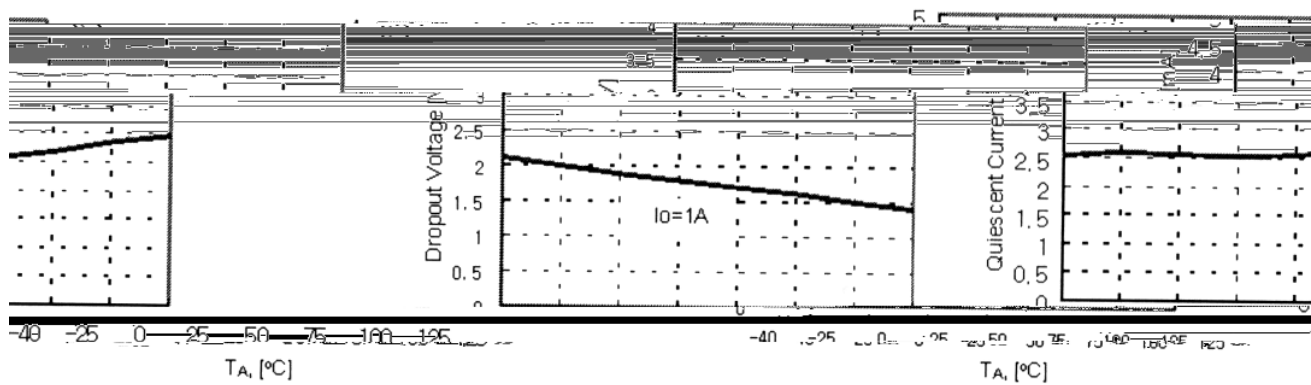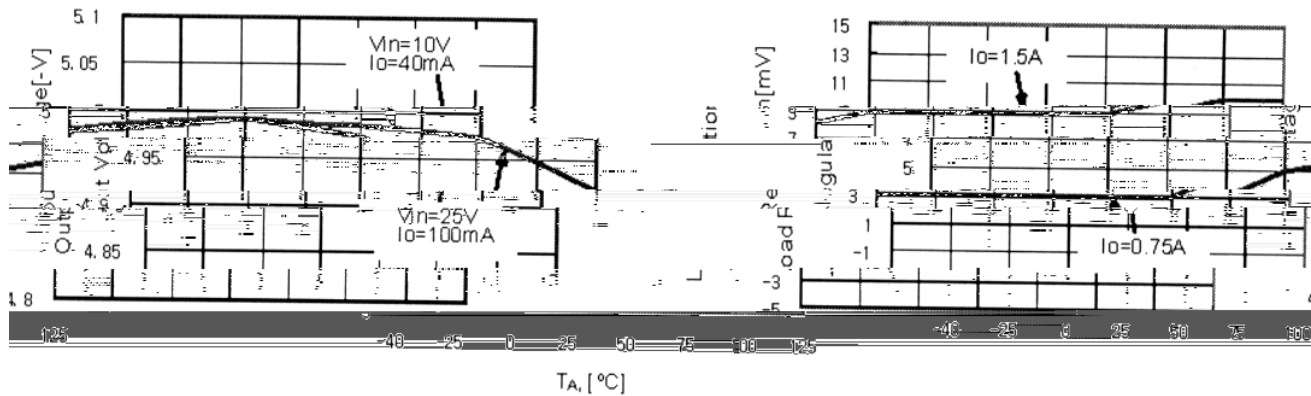


/ Package Dimensions

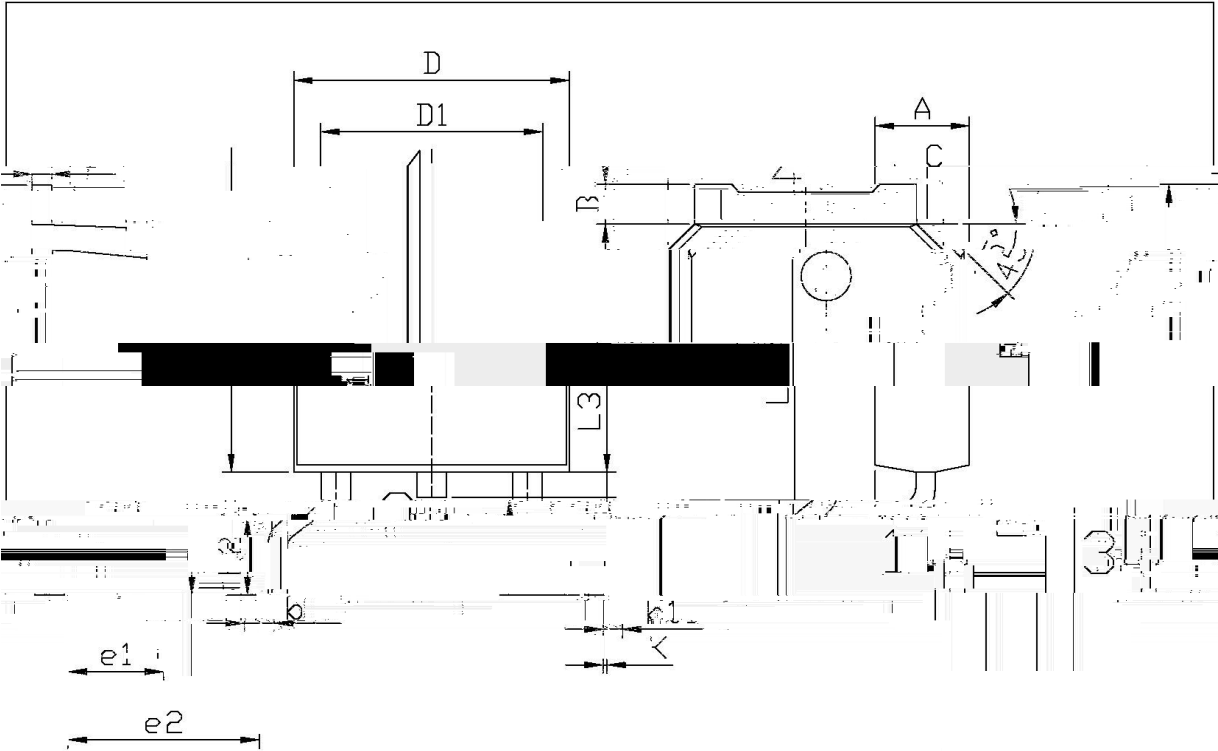

单位: mm

Symbol		Dimensions In Millimeters		Symbol		Dimensions In Millimeters	
		Min	Max			Min	Max
15	6.25			A	2.20	2.40	5.0
24	2.34			B	0.95	1.25	2.0
18	1.73			b	0.70	0.90	1.20
15	9.85	10.35		b1	0.45	0.55	
			0.55		0.12	0.30	2.00
60	0.90			D	6.45	6.75	7.00
	0.00				0.10	0.10	0.50


/ Marking Instructions

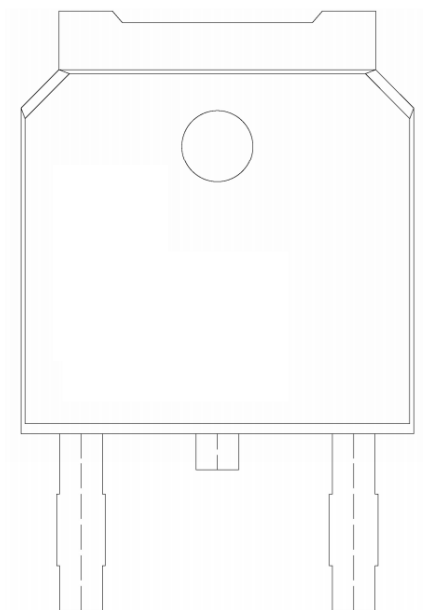

BR

79D05

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

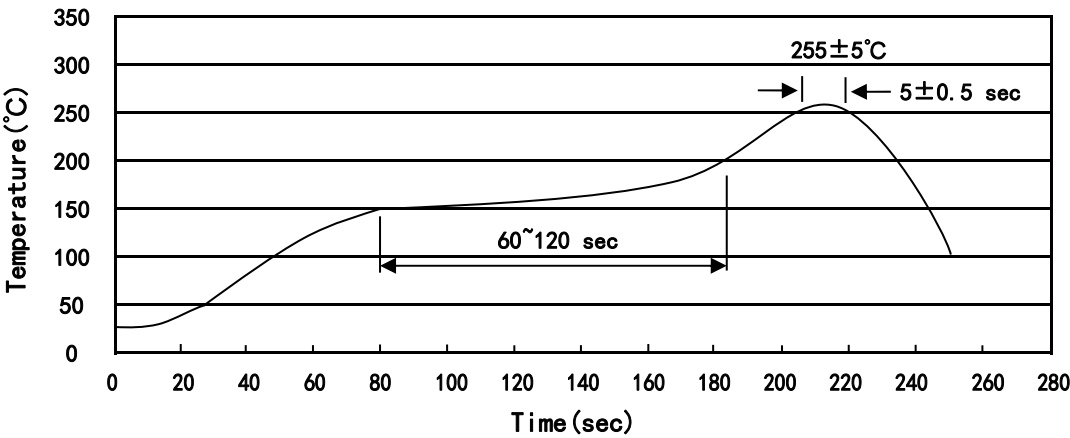

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box

	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box

/ Notices