

BRBAV19WSQ-BRBAV21WSQ

Rev.B Aug.-2025

/ Descriptions

SOD-323

Silicon Diode in a SOD-323 Plastic Package.

/ Features

AEC-Q101

Fast switching diodes, Qualified to AEC-Q101 Standards for High Reliability, HF Product.


/ Applications

Small signal diode, Meet the stringent requirements of automotive applications.

/ Equivalent Circuit



/ Pinning

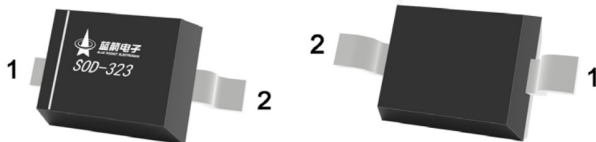

PIN1:Cathode

PIN2:Anode

/ Marking

Model	BRBAV19WSQ	BRBAV20WSQ	BRBAV21WSQ
Marking	QA8	QT2	QT3

BRBAV19WSQ-BRBAV21WSQ

Rev.B Aug.-2025




DATA SHEET

Parameter	Symbol	Rating			Unit
		BRBAV19WSQ	BRBAV20WSQ	BRBAV21WSQ	
Peak Repetitive Reverse Voltage	V_{RRM}	120	200	250	V
Working Peak Reverse Voltage, DC Reverse Voltage	V_{RWM} V_R	100	150	200	V
RMS Reverse Voltage	$V_{R\ RMS}$	71	106	141	V
Non-Repetitive Peak Forward Current	I_{FM}	400			m A
Output Current	I_O	200			m A
Non-Repetitive Peak Forward Surge Current	I_{FSM}	t=1.0			



/ Electrical Characteristic Curve

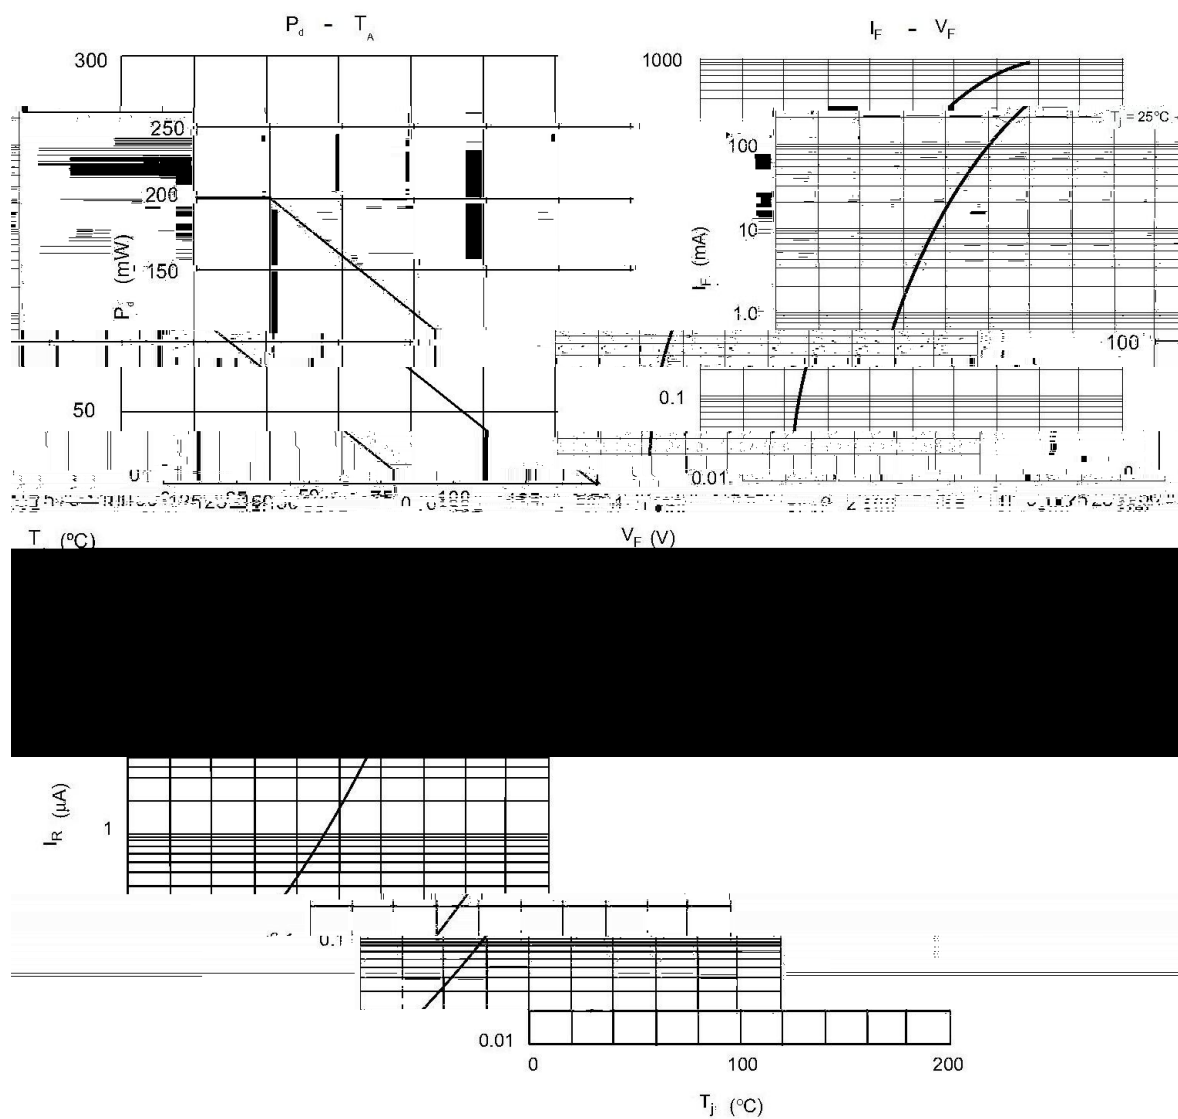

BRBAV19WSQ-BRBAV21WSQ


Rev.B Aug.-2025



蓝箭电子
BLUE ROCKET ELECTRONICS

DATA SHEET

/ Marking Instructions

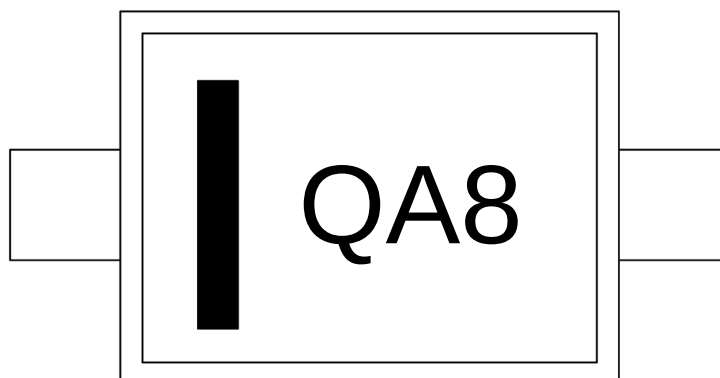

Q


A8

Note:

Q: Automobile halogen-free product Code

A8: Product Type

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

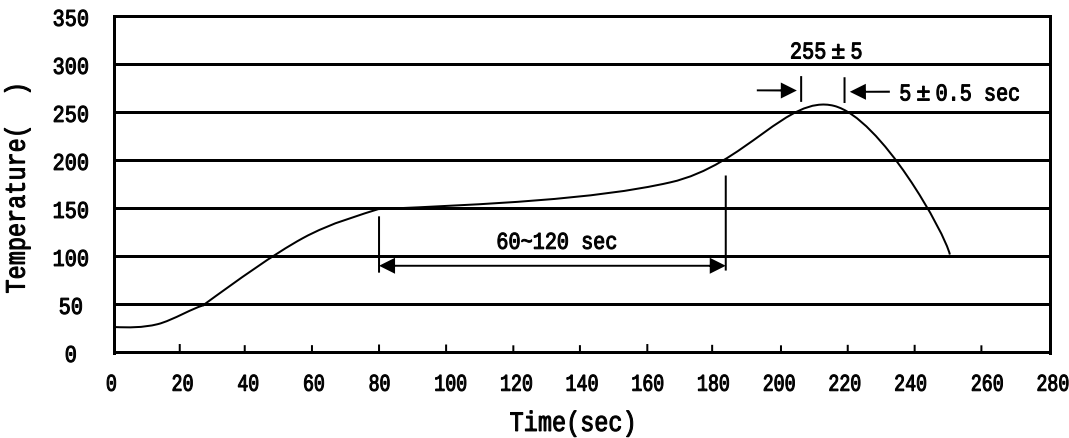

Note:

- 1. 150 200 60 120sec; 1.Preheating:150~200 , Time:60~120sec.
- 2. 255±5 5±0.5sec; 2.Peak Temp.:255±5 , Duration:5±0.5sec.
- 3. 2 10 /sec. 3. Cooling Speed: 2~10 /sec.

/ Resistance to Soldering Heat Test Conditions

260±5 10±1 sec. Temp.:260±5 Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type	Units					Dimension (unit mm ³)		
	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
SOD-323	3,000	10	30,000	6	180,000	7 ×8	180×120×180	390×385×205

/ Notices