


/ Descriptions




/ Features

- ◆
- ◆
- ◆
- ◆
- ◆
- ◆
- ◆
- ◆

- ◆
- ◆
- ◆

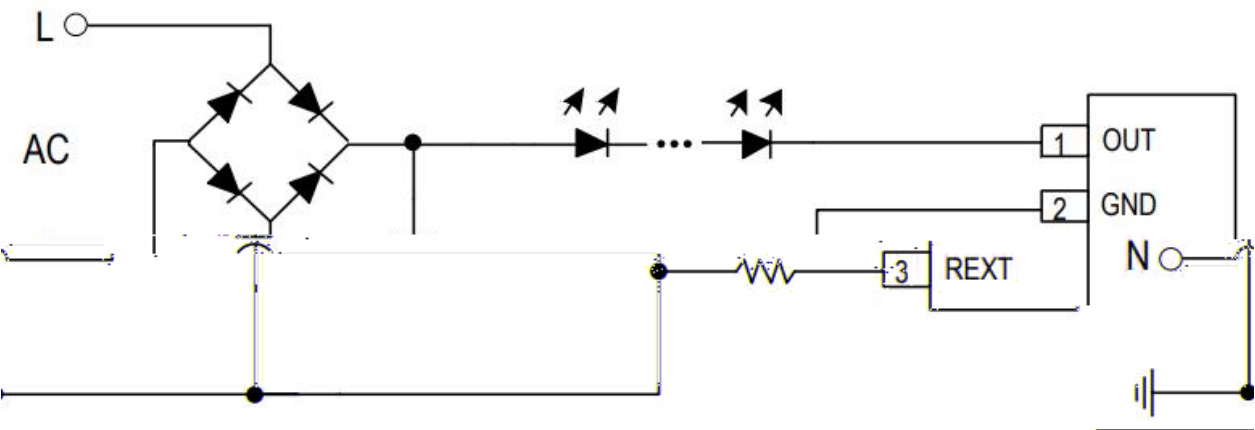

/ Pinning

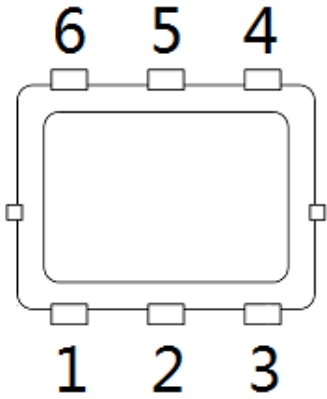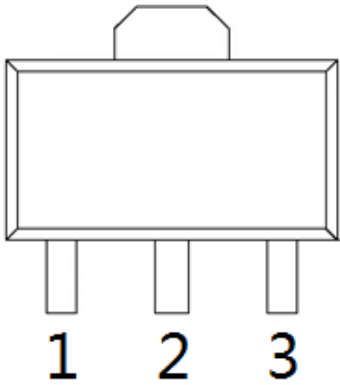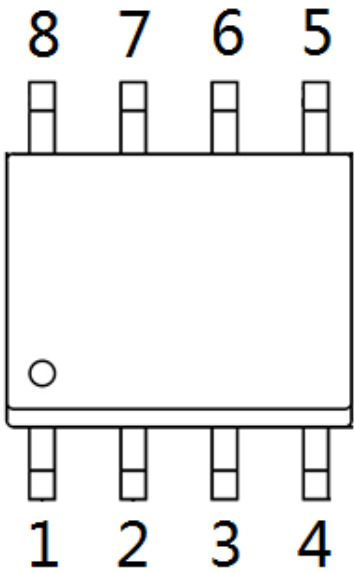

/ Part Number

/ Absolute Maximum Ratings(Ta=25)

	θ		
	θ		
	θ		


Ω

/ Working Range

/ Electrical Characteristics(T_A=25)

						μ
				±		

/ Functionl Block Diagram

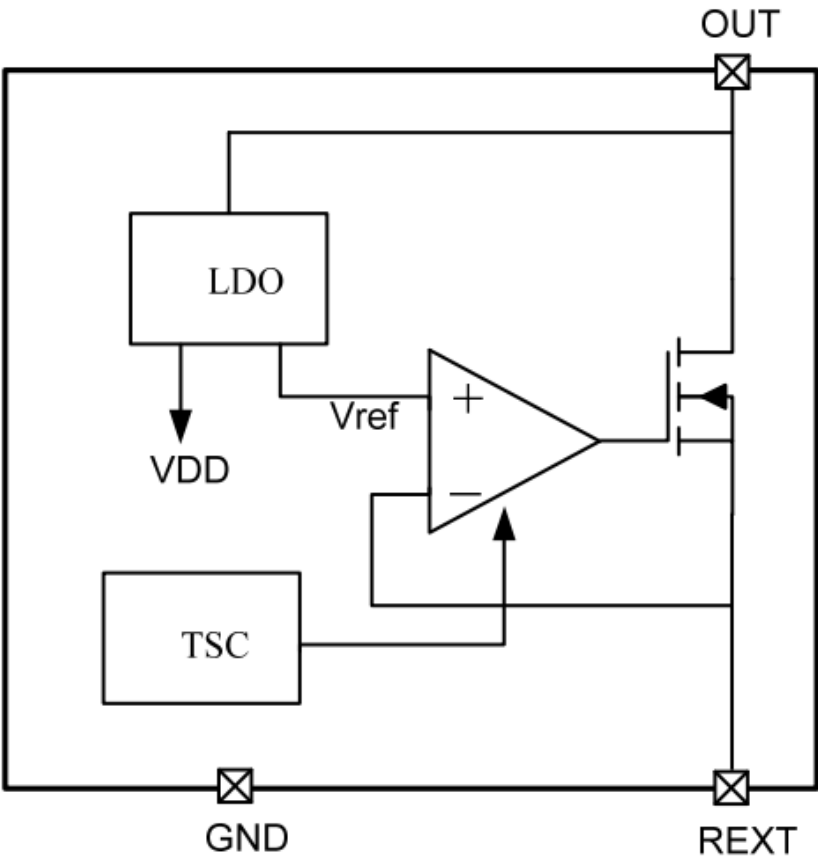

/ Functional Description










(OUT)

OUT REXT


Ω

BRCG5111 Series


PCB & & / PCB picture or Actual picture or Mounting pad size

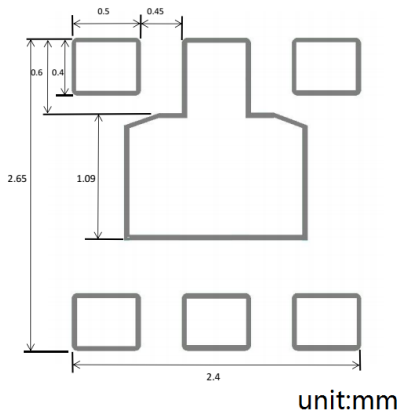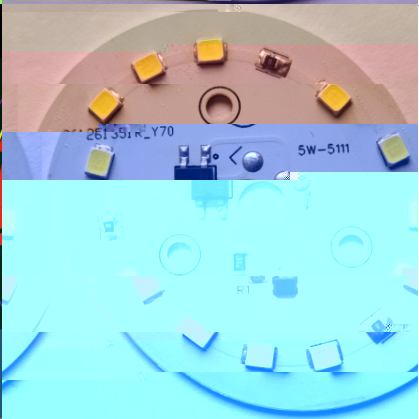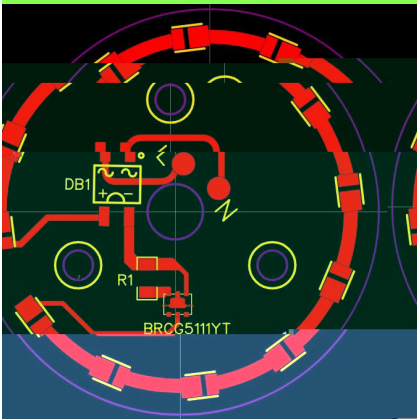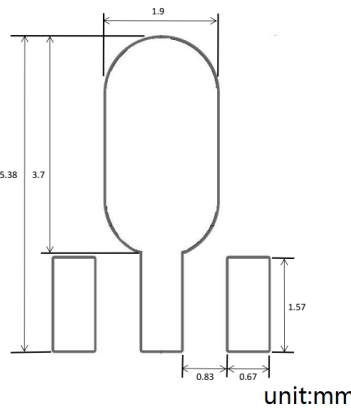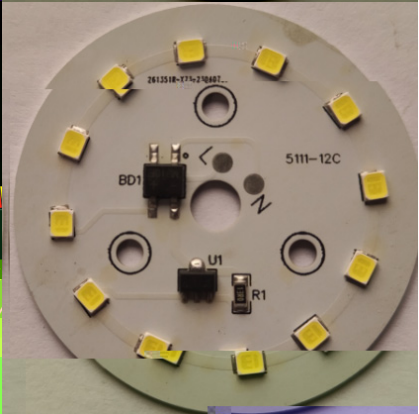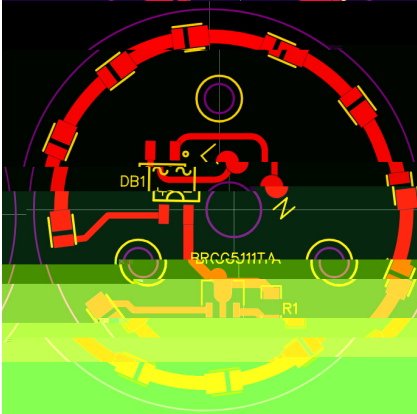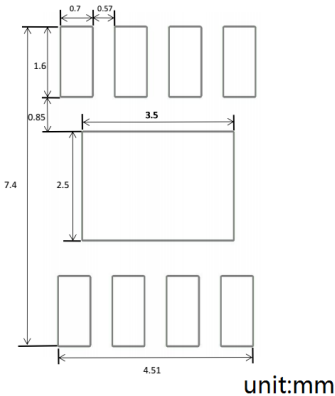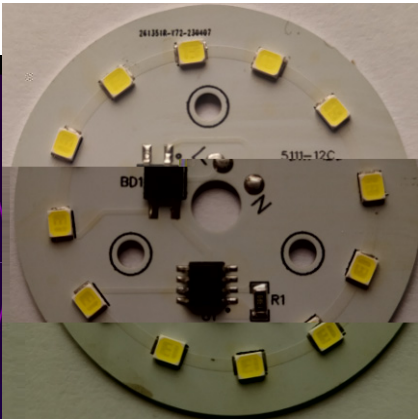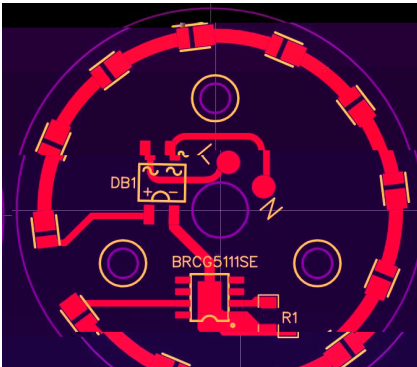


/ Package Dimensions

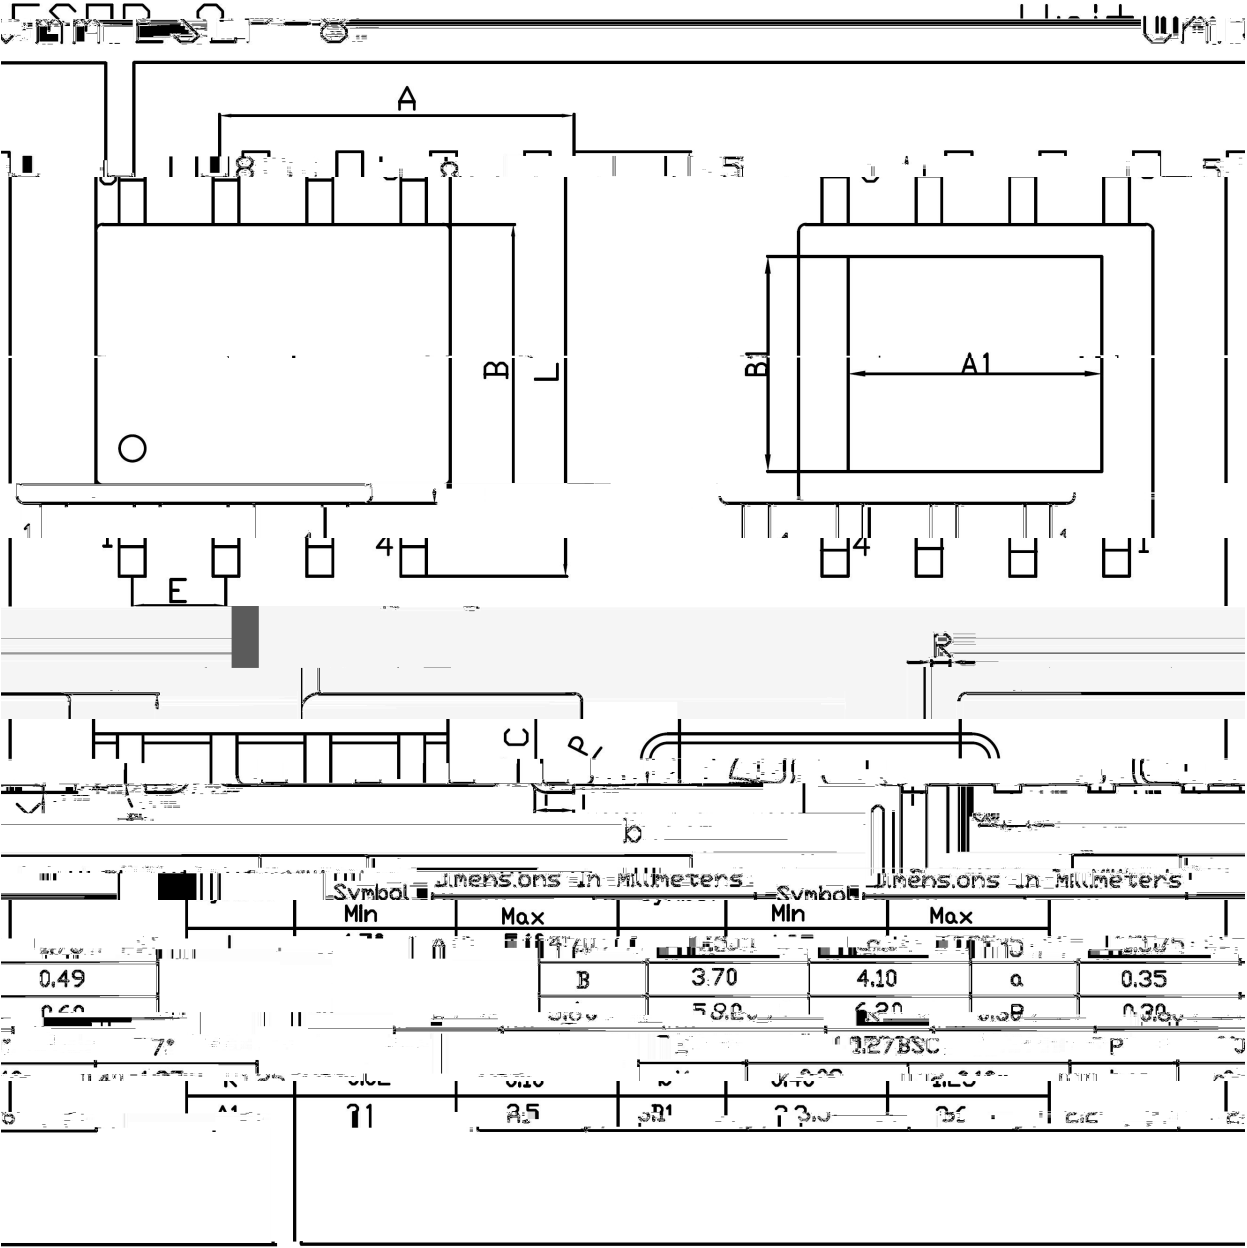


单位: 

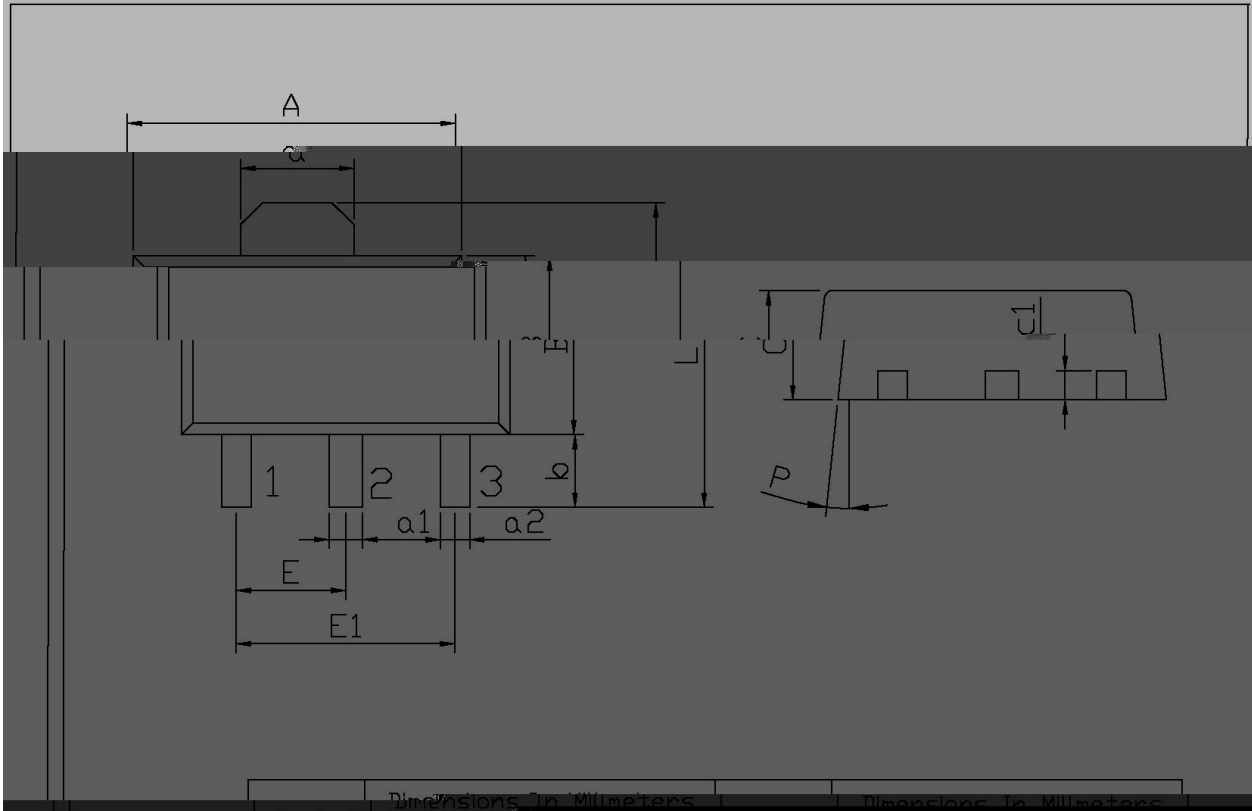


/ Package Dimensions

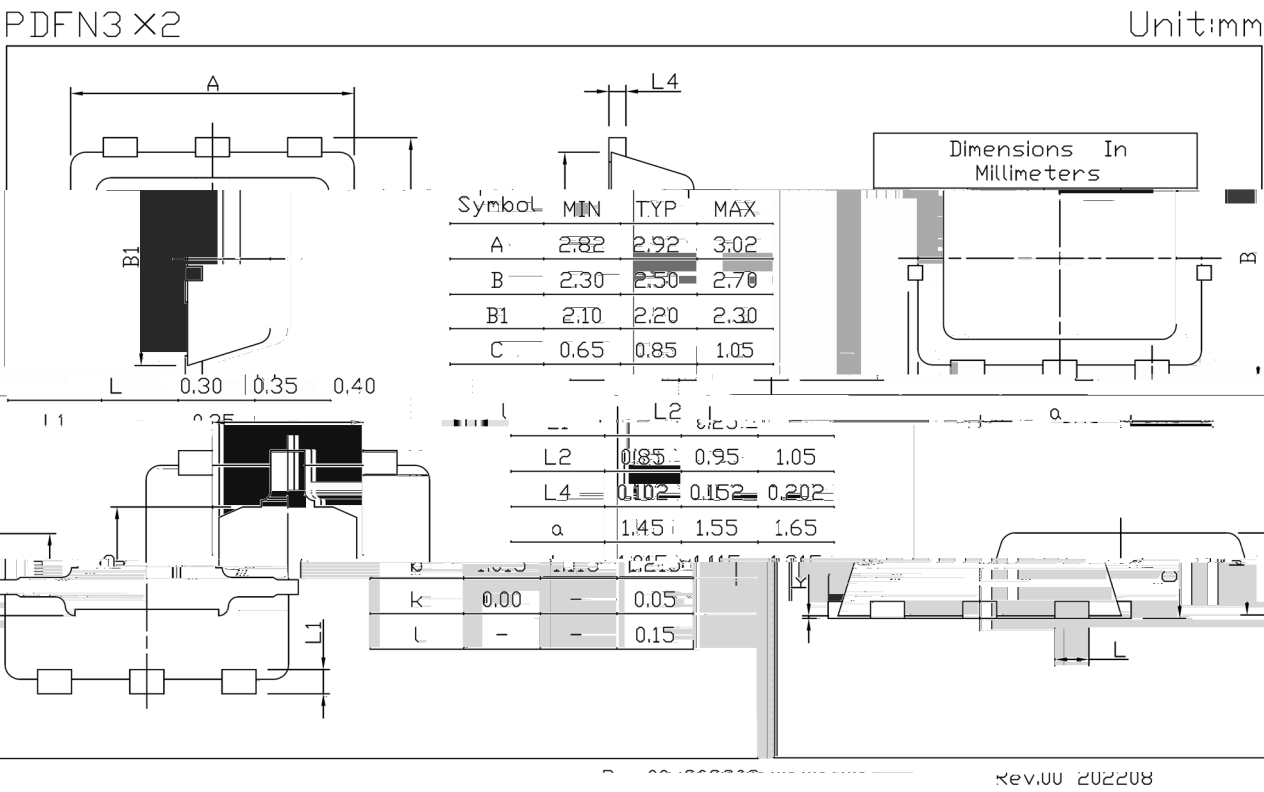


/ Marking Instructions

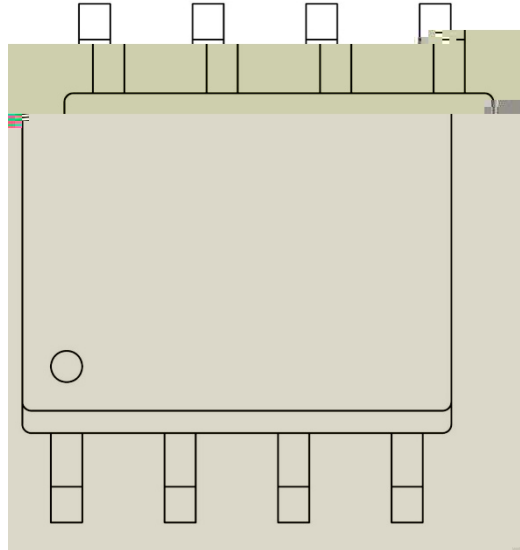


/ Marking Instructions

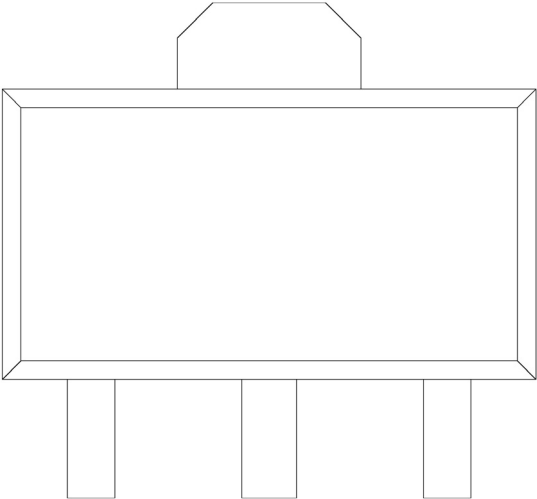

/ Marking Instructions

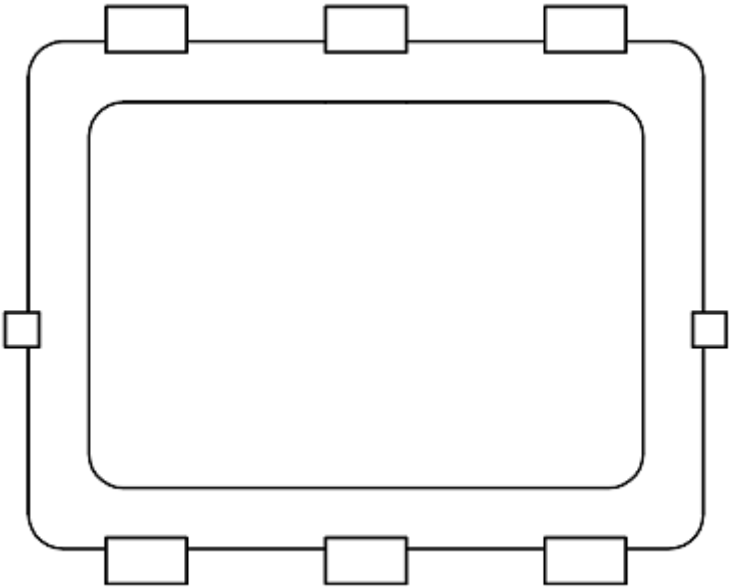

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

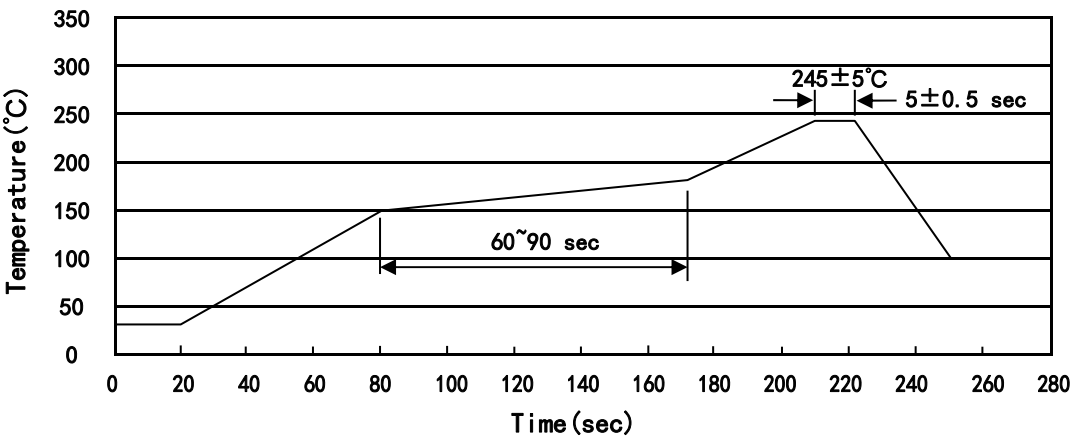

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box

Package Type	Units					Dimension (unit mm)		

/ Notices