

描述 / Descriptions

± ± Ø

特点 / Features


Θ


Ø

应用 / Applications

SGD PS6

应用电路 / Application Circuit

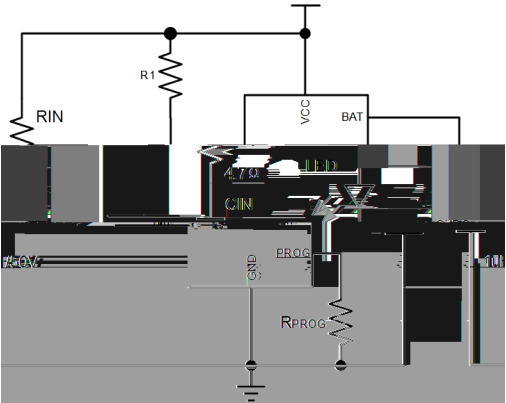



PIN Num.	Symbol	Function
	QF	
	SUR J	

PARAMETER	SYMBOL	RATINGS	UNITS
			3/8
			3/8
			3/8
			3/8

电性能参数 / Electrical Characteristics(V_{IN}=5V, V_{BAT}=3.6V, Ta=25℃, unless otherwise specified)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
						μ
						μ
						μ
						μ
		$\frac{3}{8} \leq \quad \leq \frac{3}{8}$				
						μ
						μ
						μ
	Δ					
						$\frac{3}{8}$
						μ
						μ

功能描述

2

正常充电周期

BRCL4079YT-4.2


充电终止

BRCL4079YT-4.2

功能描述 / Function description

稳定性考虑

$$\leq \frac{\quad}{\pi \cdot \quad}$$

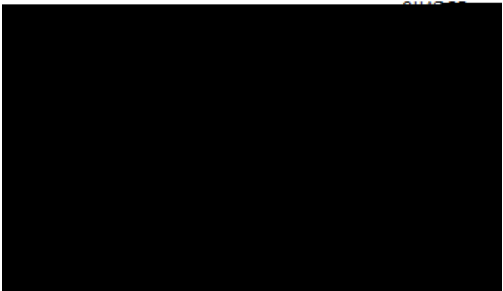


功耗

$$T_J=P_D\times\theta_{JA} + T_A$$


外形尺寸图 / Package Dimensions

PDFN3 × 2Unit:mm

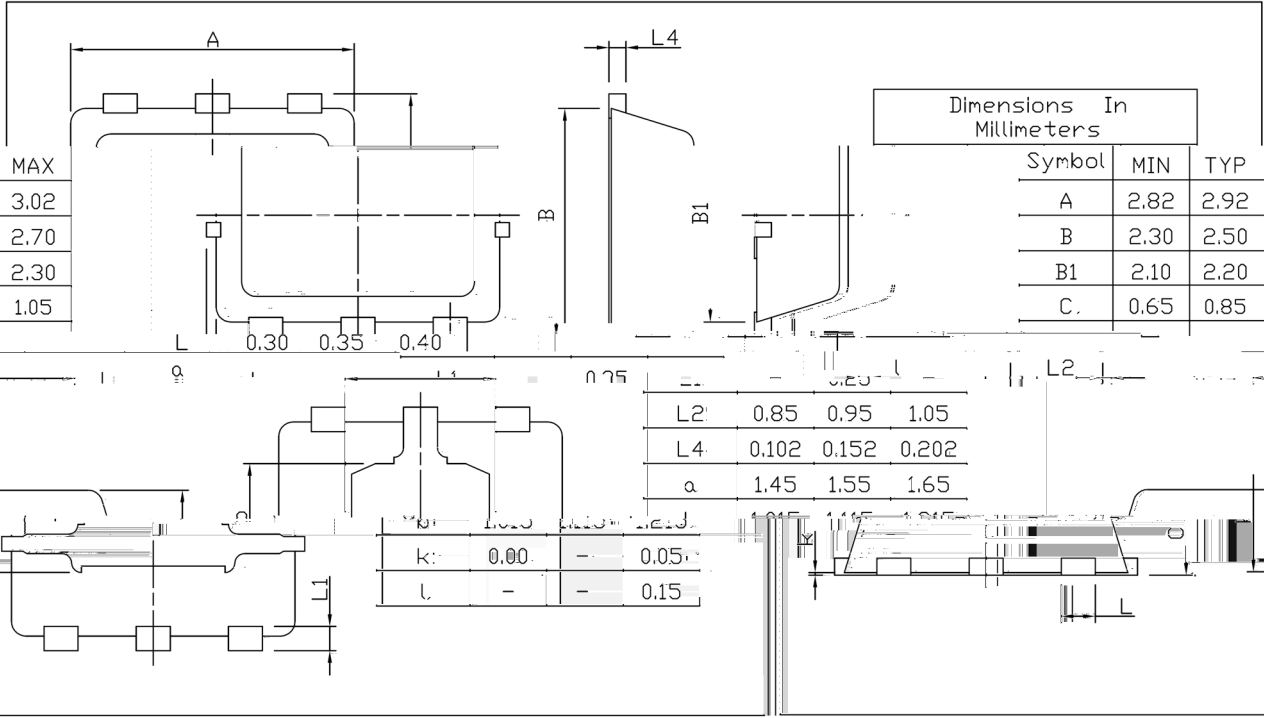

Rev.00 202208


印章说明 / Marking Instructions

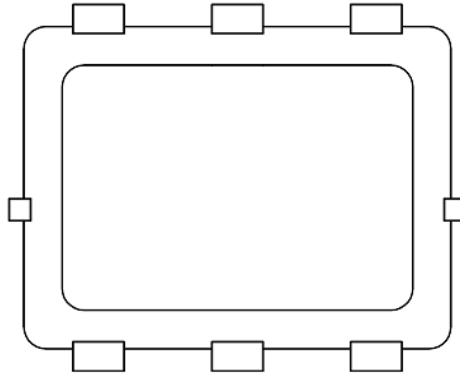

EU

73: <075

回流焊温度曲线图(无铅) / Temperature Profile for IR Reflow Soldering(Pb-Free)

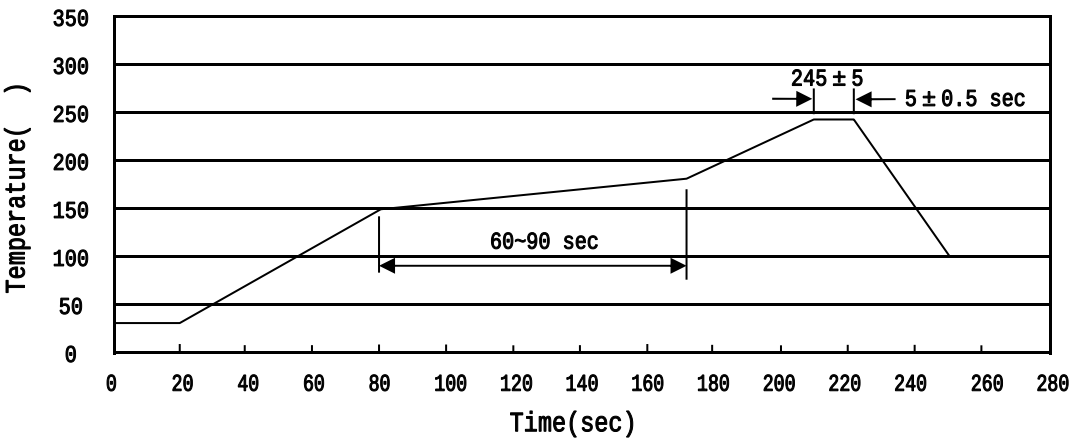

2 3/8 3/8 2 2 3/8 3/8 2

耐焊接热试验条件 / Resistance to Soldering Heat Test Conditions

2 3/8 2 °C

包装规格 / Packaging SPEC.

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱

使用说明 / Notices