



		№				

- ○

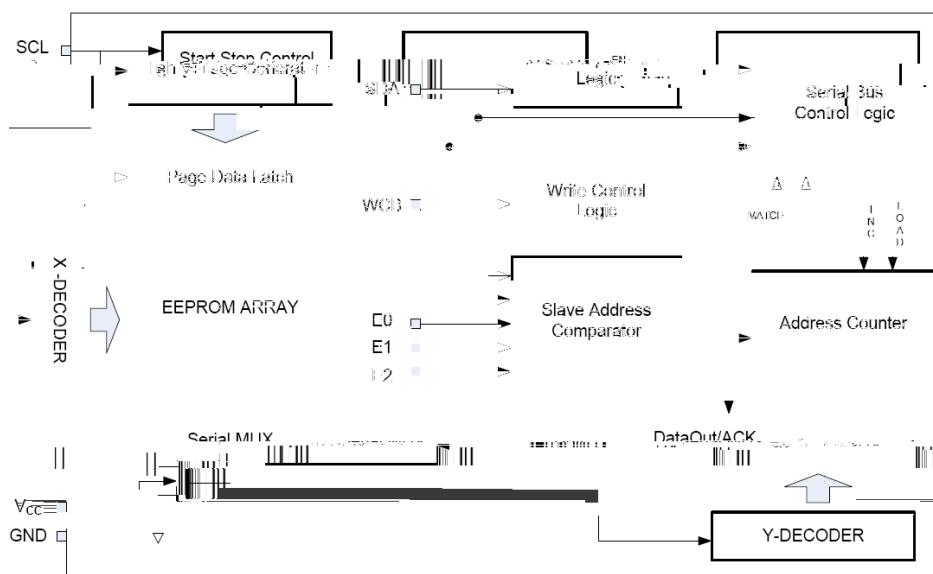


H

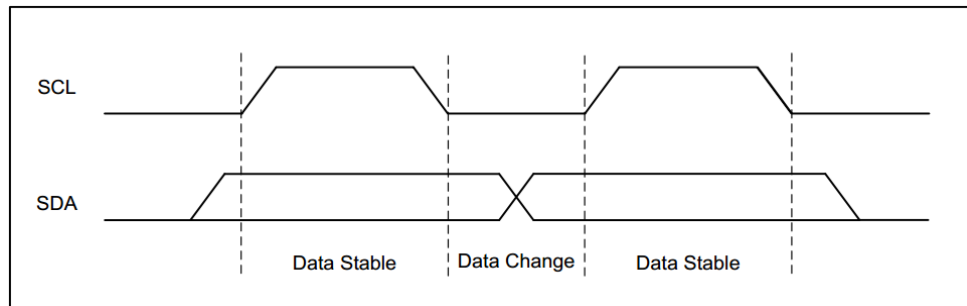


H

H

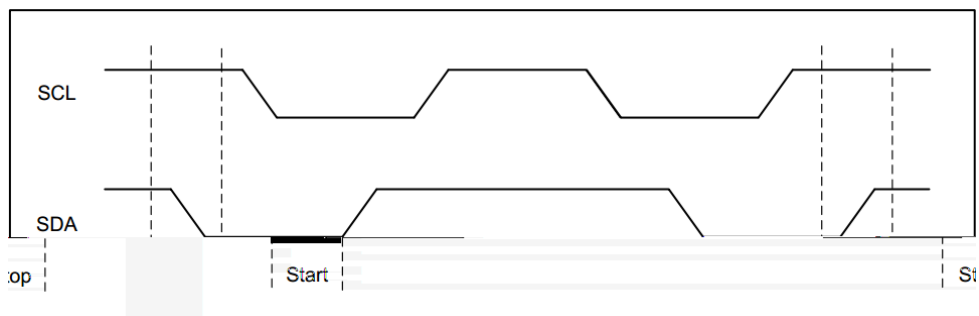


H

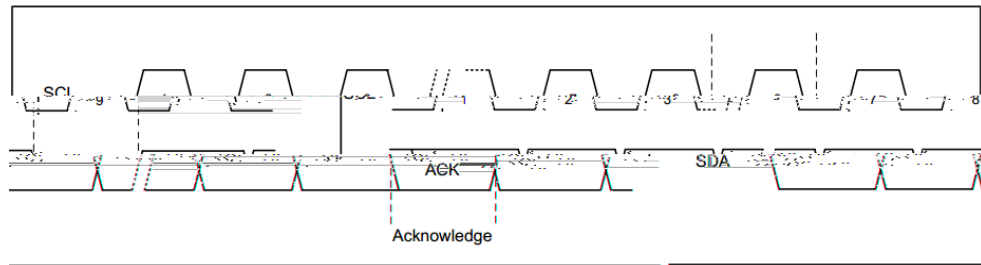

H


H

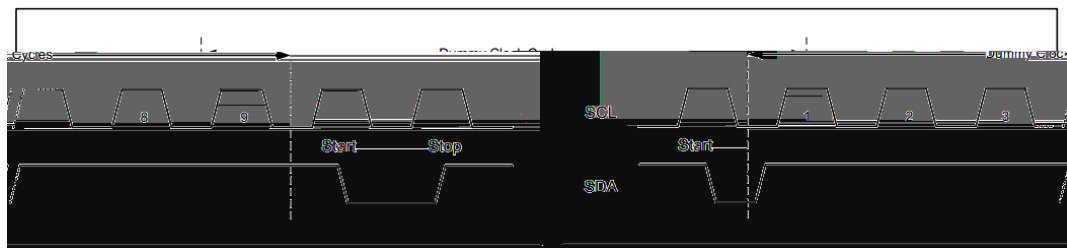


H

H


H





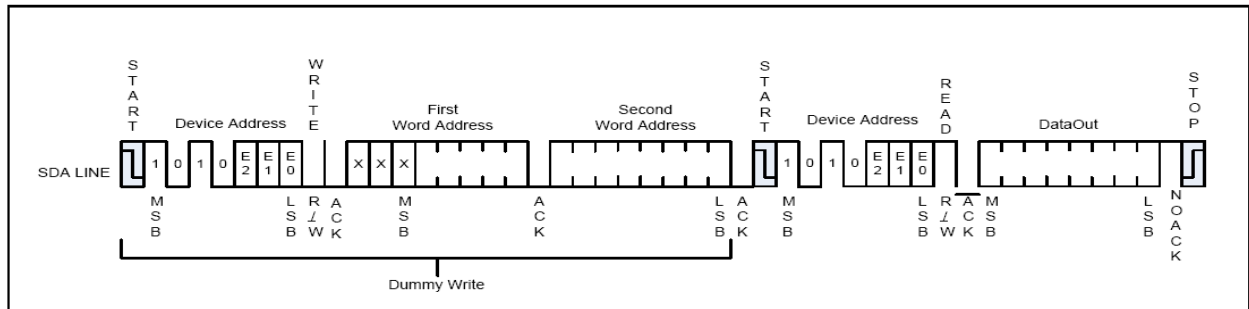


H

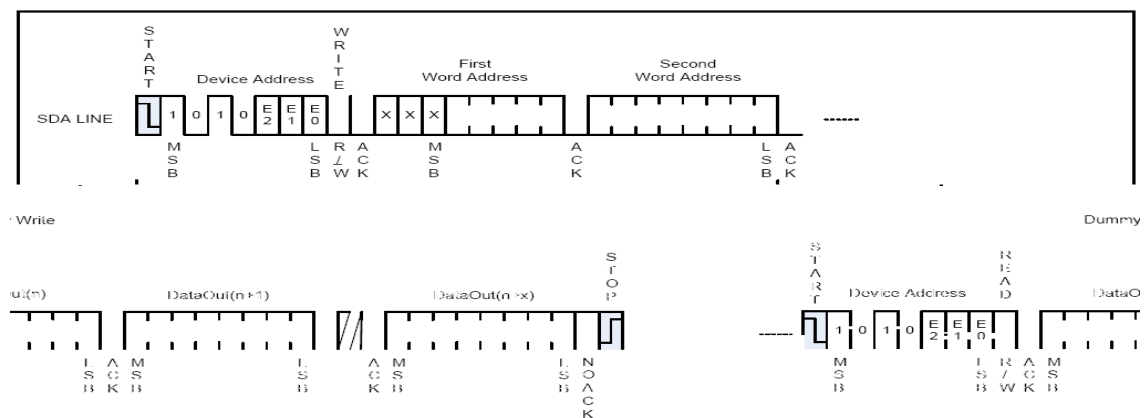


H


H

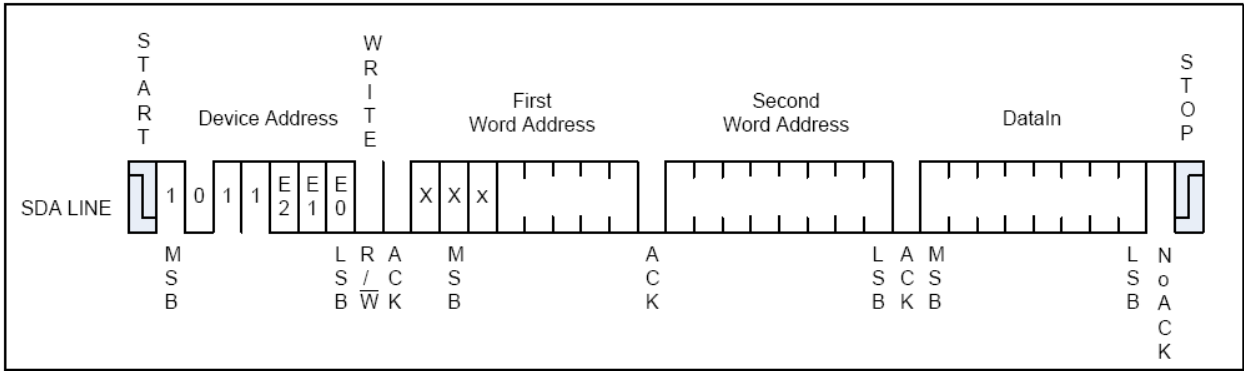


H

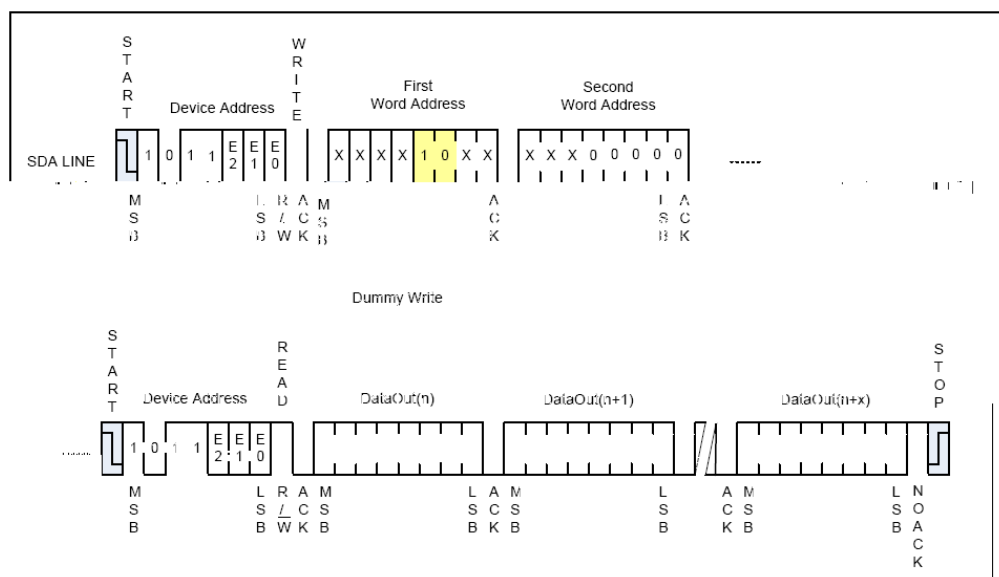

Bus Timing

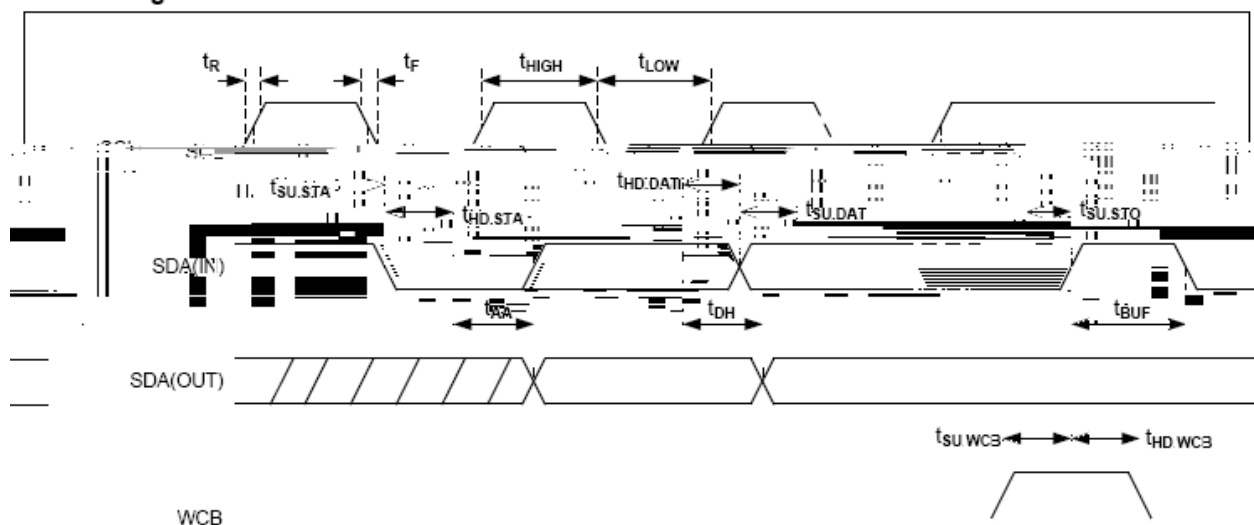

Write Cycle Timing

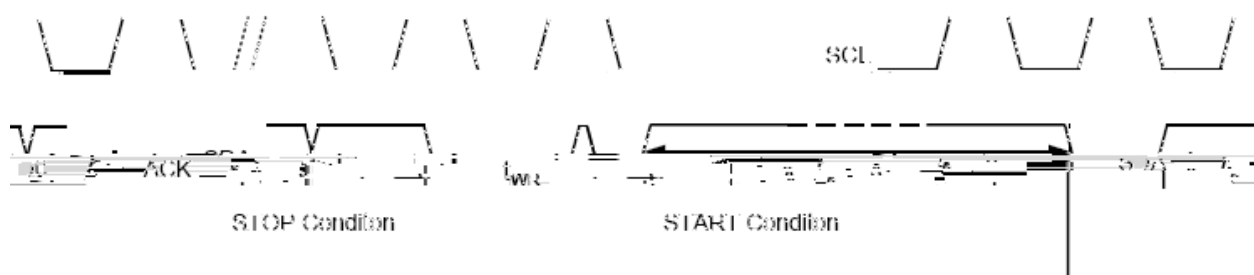



t_{WC} is the time from the start of the write sequence to the end of the write cycle. Note: The write cycle

07000-0


07000-0

1.000000

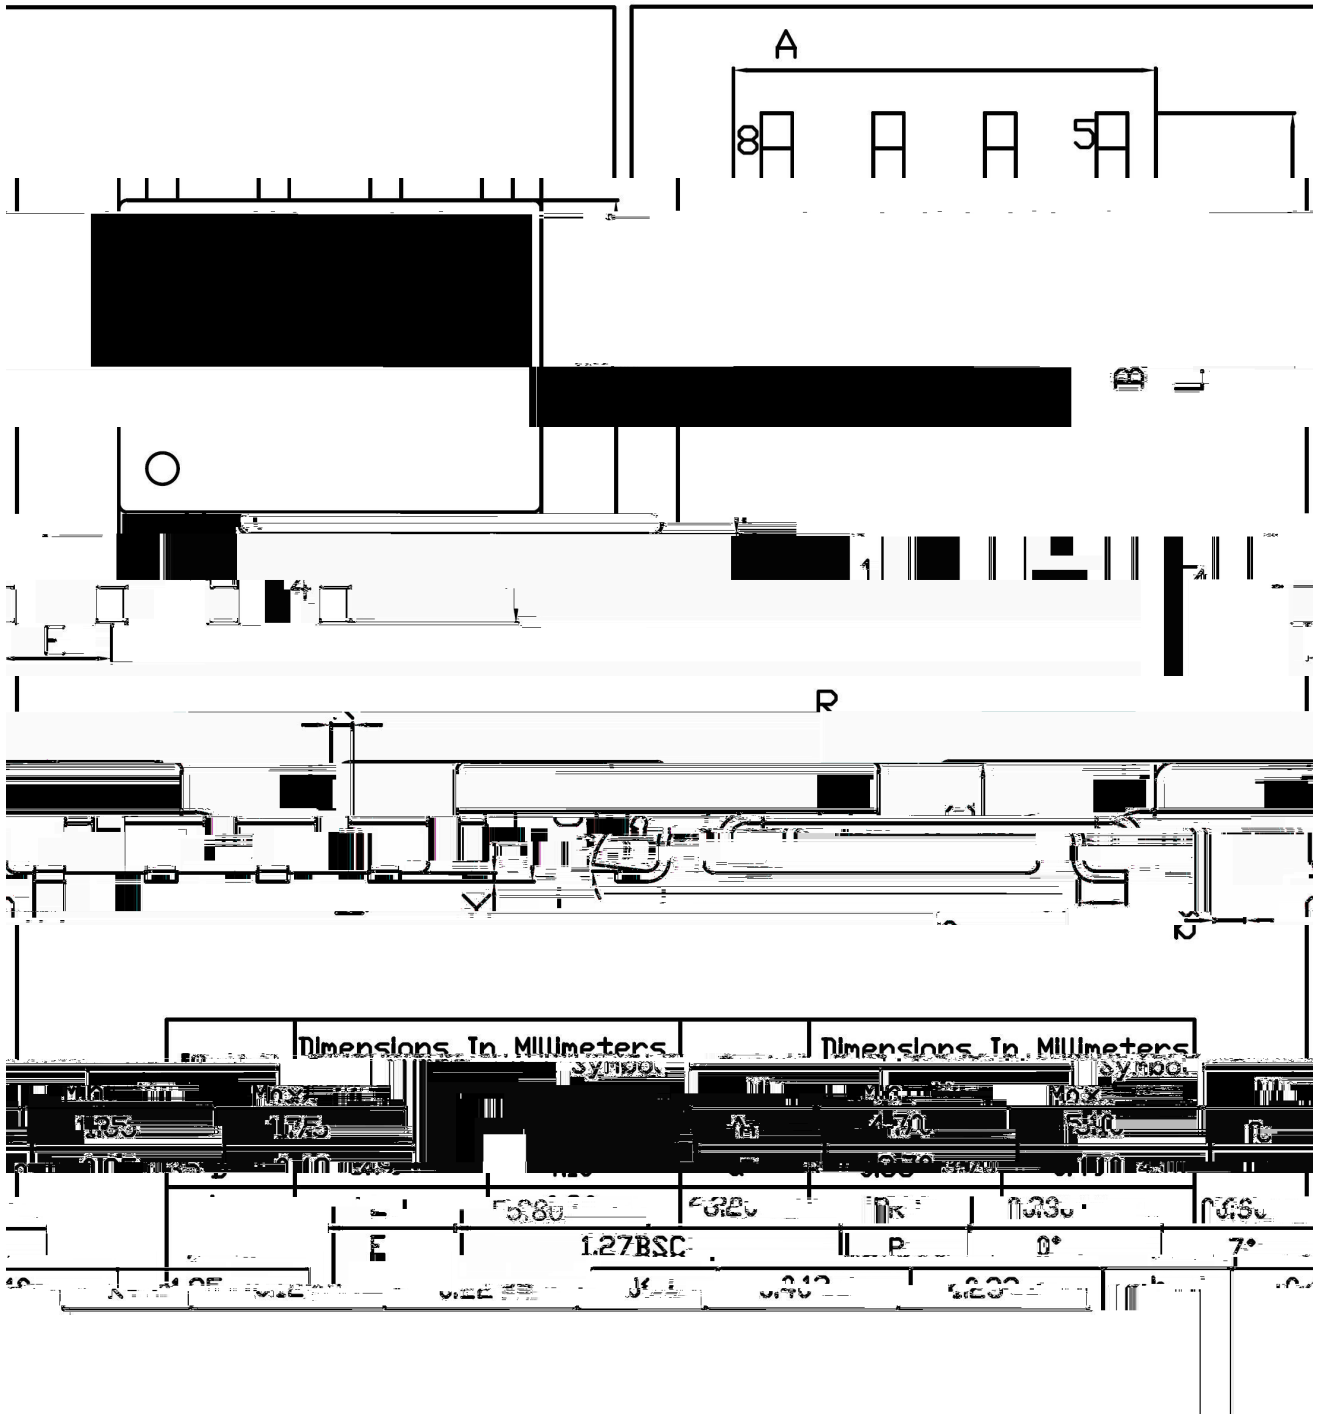

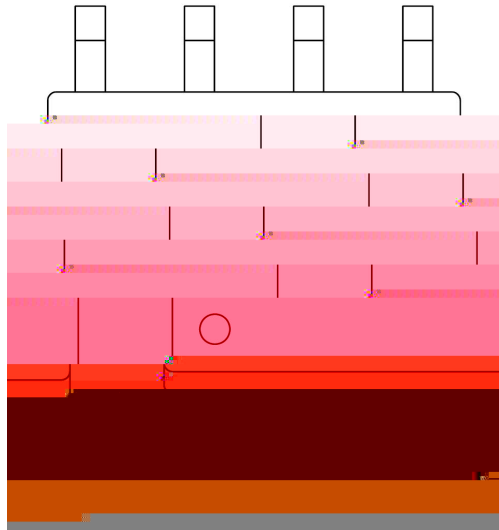

Temperature Profile for IR Reflow Soldering(Pb-Free)

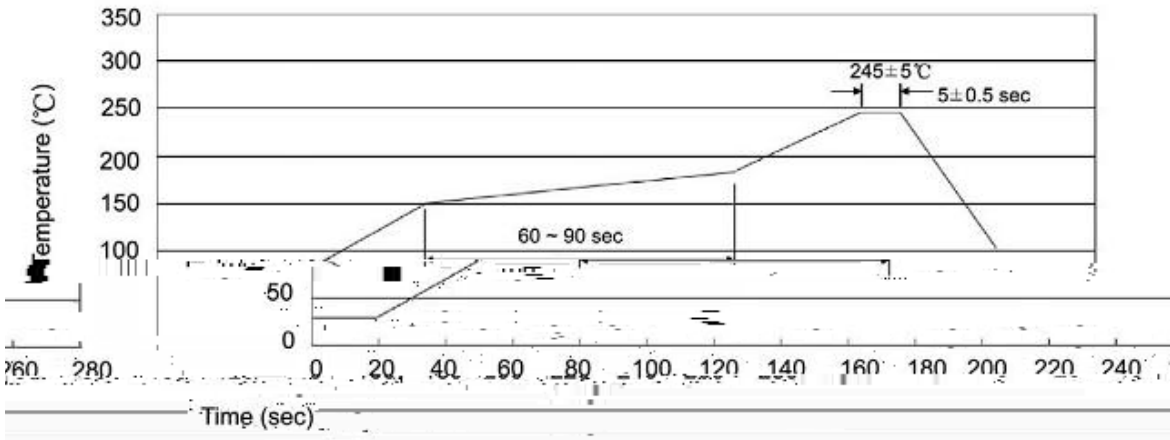

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOP/ESOP-8	4,000	2	8,000	6	48,000	13 ×12	360×360×50	380×335×366