

/ Descriptions

N-Channel Enhancement Mode Field Effect Transistor in a TO-252 Plastic Package.

/ Features

$V_{DS} (V) = 30V$ $I_D = 135 A$ ($V_{GS} = \pm 20V$)



$R_{DS(ON)}@10V$ 3mR(Typ.2.3mR)

$R_{DS(ON)}@4.5V$ 5mR(Typ.3.1mR)

HF Product.

/ Applications

Load Switch Applications,Battery Power Management.

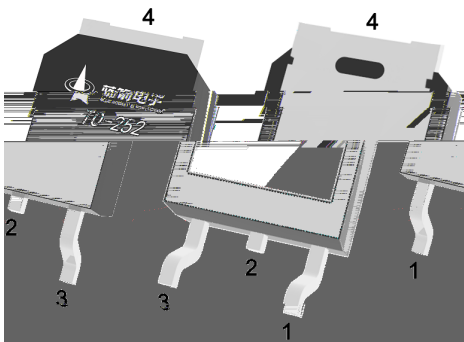/ Equivalent Circuit**/ Pinning**

PIN1 G

PIN 2 4 D

PIN 3 S

/ Marking

See Marking Instructions.

/ Absolute Maximum Ratings(Ta=25)

Parameter		Symbol	Rating	Unit
Drain-Source Voltage		V_{DSS}	30	V
Drain Current		$I_D(T_c=25^\circ\text{C})$	135	A
Drain Current - Pulsed		I_{DM}	285	A
Gate-Source Voltage		V_{GSS}	± 20	V
Single Pulsed Avalanche Energy		E_{AS}	706	mJ
Avalanche Current		I_{AS}	42	A
Power Dissipation		$P_D(T_c=25^\circ\text{C})$	90	W
Operating and Storage Temperature Range		T_J, T_{stg}	-55 to 150	$^\circ\text{C}$
Junction-to-Ambient	$t \leq 10$	R_{JA}	20	/W
Junction-to-Ambient	Steady-State		50	
Junction-to-Case	Steady-State	R_{JC}	1.39	


/ Electrical Characteristics(Ta=25)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{GS}=0V$ $I_D=250\text{ A}$	30	35		V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=30V$ $V_{GS}=0V$			1	A
Gate-Body Leakage Current Forward	I_{GSS}	$V_{GS}=\pm 20V$ $V_{DS}=0V$			± 0.1	A
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}$ $I_D=250\text{ A}$	1.0	1.6	3.0	V
Static Drain-Source On-Resistance	$R_{DS(on)1}$	$V_{GS}=10V$ $I_D=20A$		2.3	3	m
	$R_{DS(on)2}$	$V_{GS}=4.5V$ $I_D=10A$		3.1	5	m
Drain-Source Diode Forward Voltage	V_{SD}	$V_{GS}=0V$ $I_S=1A$			1.2	V
Input Capacitance	C_{iss}	$V_{DS}=25V$ $V_{GS}=0V$ $f=1MHz$		4650		pF
Output Capacitance	C_{oss}			650		
Reverse Transfer Capacitance	C_{rss}			480		
Gate resistance	R_g	$V_{GS}=0V$ $V_{DS}=0V$ $f=1MHz$		1.5		




/ Electrical Characteristics(Ta=25)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Total Gate Charge	$Q_{g(10V)}$	$V_{GS}=10V$ $V_{DS}=15V$ $I_D=20A$		32		nC
Total Gate Charge	$Q_{g(4.5V)}$			15		
Gate Source Charge	Q_{gs}			5.2		
Gate Drain Charge	Q_{gd}			6.5		
Turn-On Delay Time	$t_{d(on)}$	$V_{GS}=10V$ $V_{DS}=15V$ $R_L=0.75$ $R_{GEN}=3$		8.5		ns
Turn-On Rise Time	t_r			4.2		
Turn-Off Delay Time	$t_{d(off)}$			30		
Turn-Off Fall Time	t_f			5.7		


/ Electrical Characteristic Curve

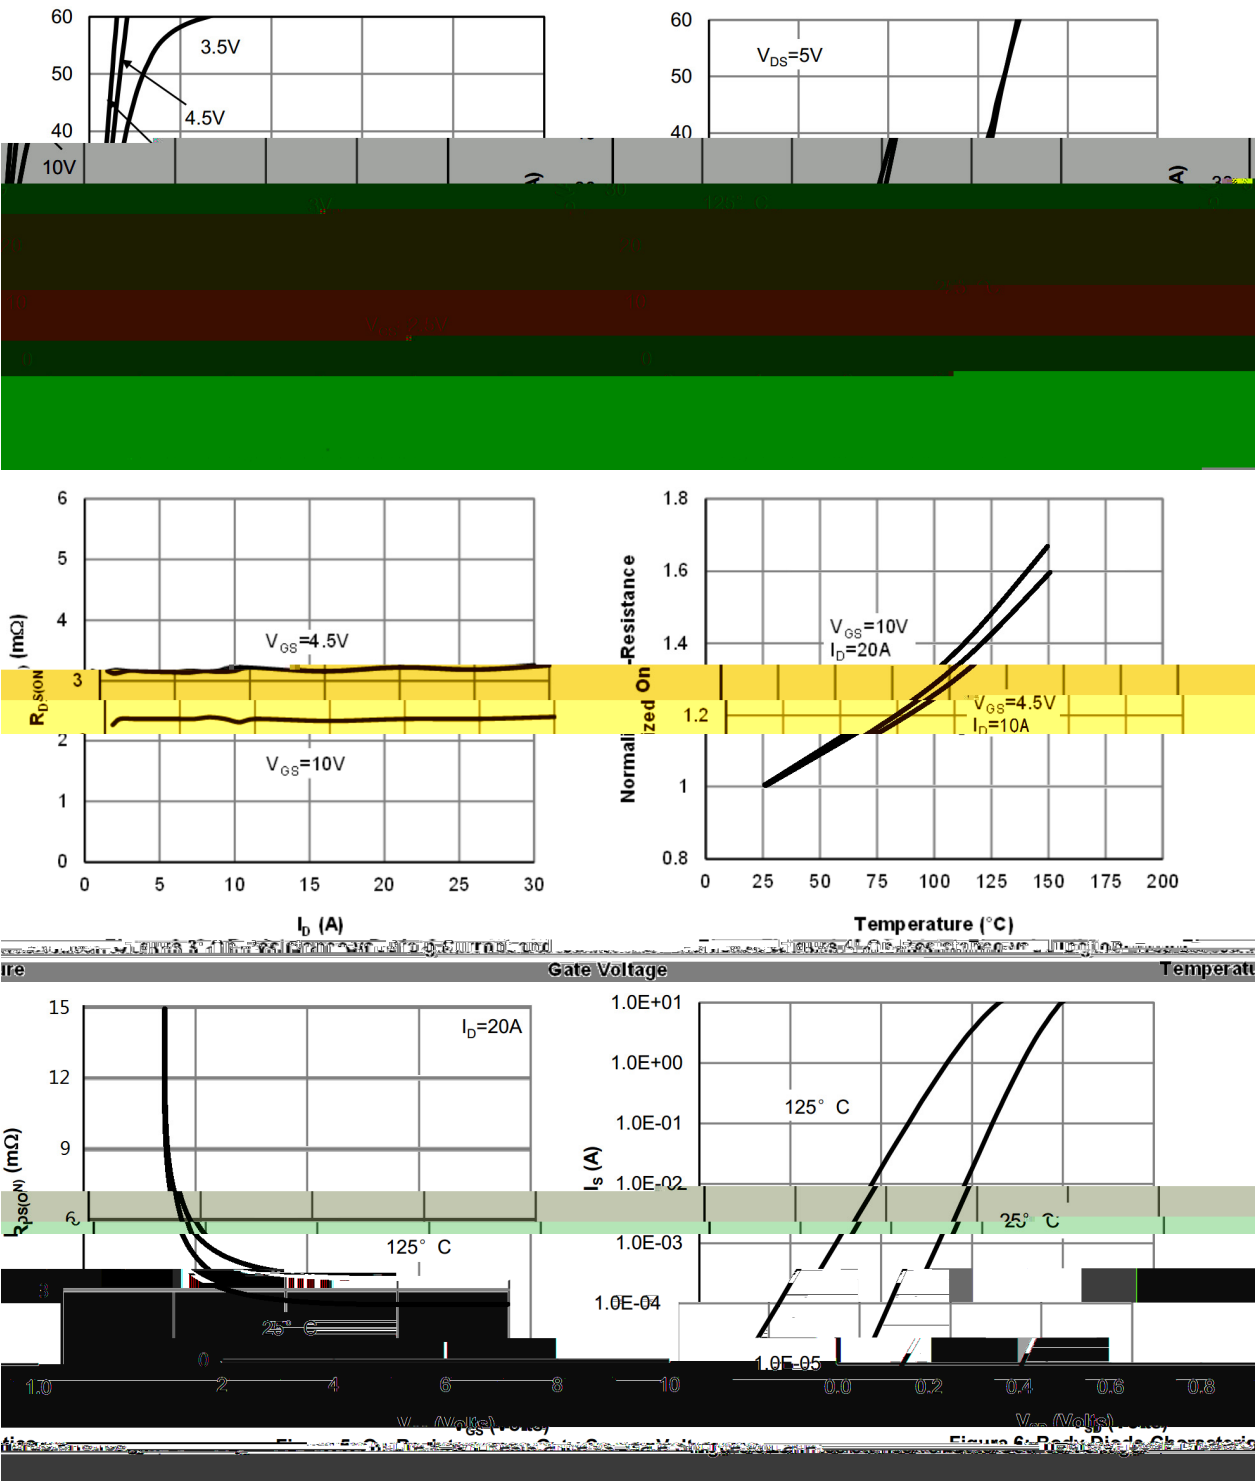

Electrical Characteristic Curve

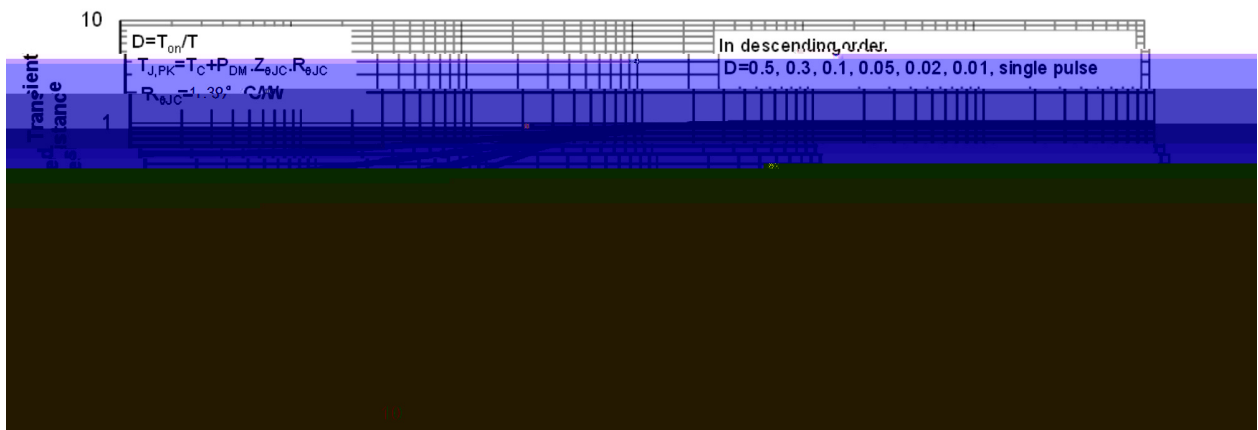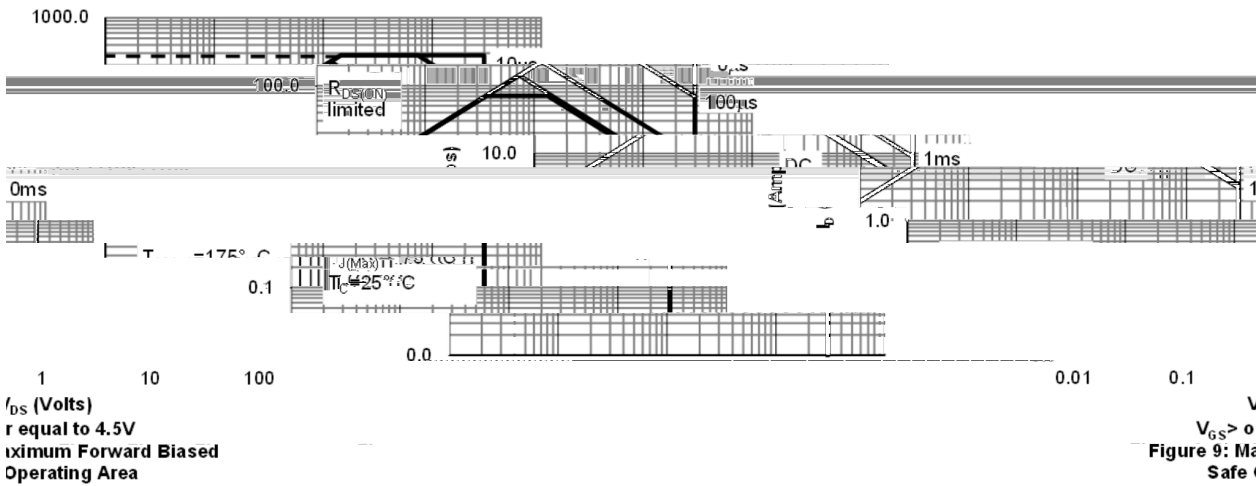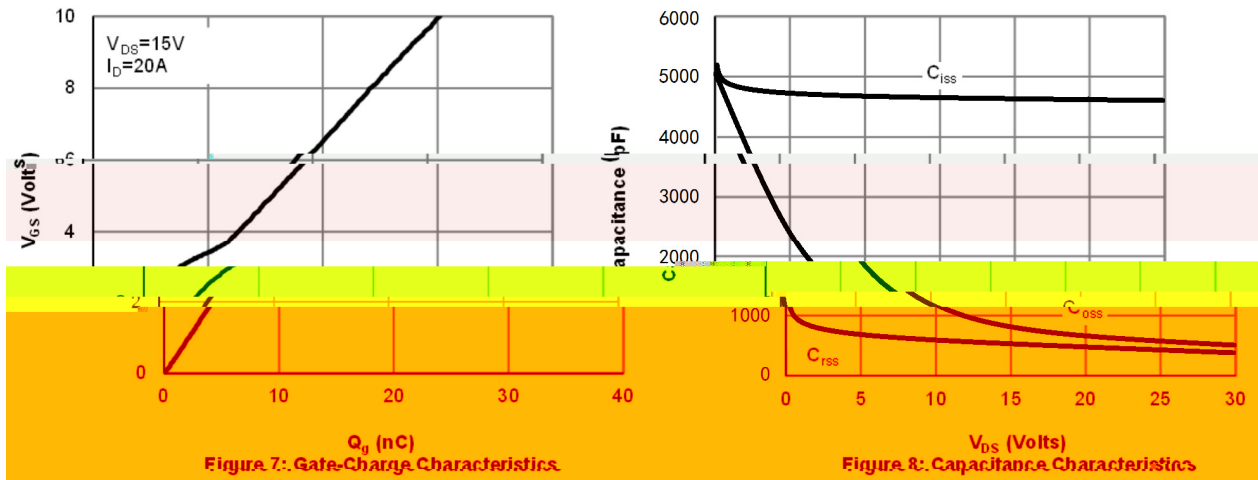

/ Package Dimensions

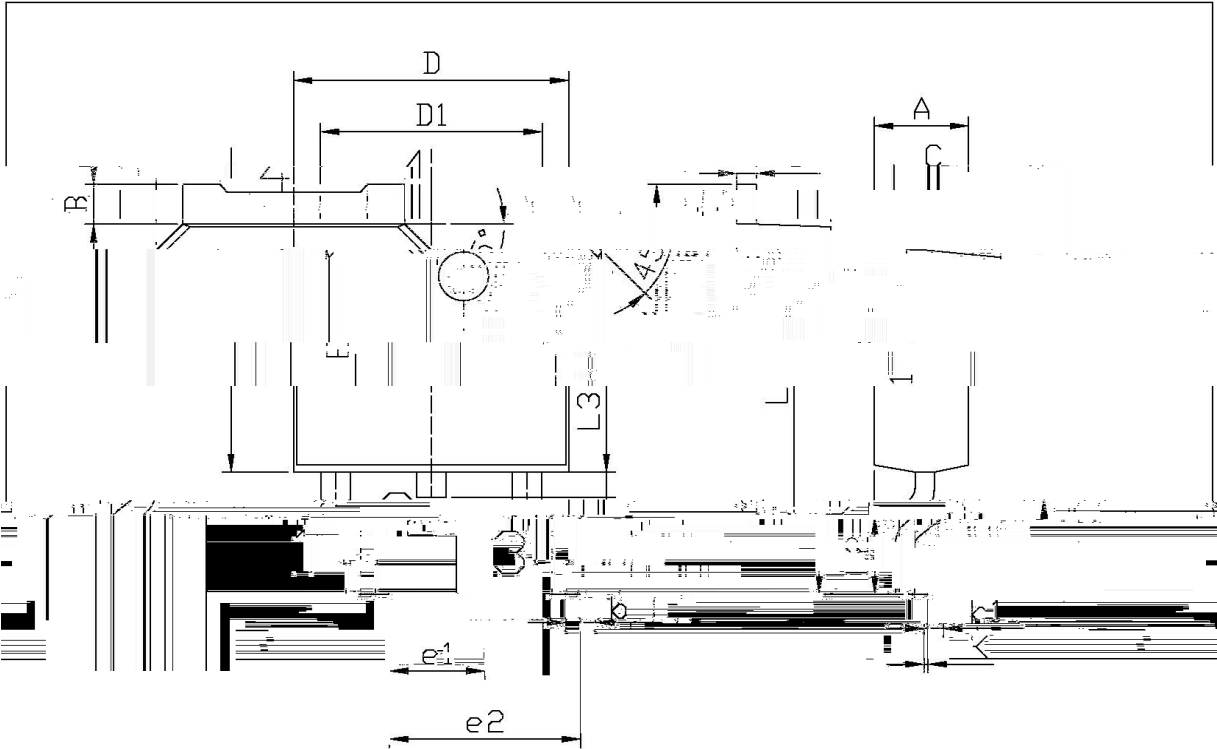


单位: mm

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
E	5.95	6.25	A	2.20	2.40
e1	2.24	2.34	B	0.95	1.25
L1	9.85	10.35	C	0.70	0.75
L2	0.55	0.55	b1	0.45	0.45
L3	0.90	0.90	J	0.70	0.70
D	6.45	6.45	L3	0.60	0.60
K	0.00	0.10	J1		

T0-252

/ Marking Instructions

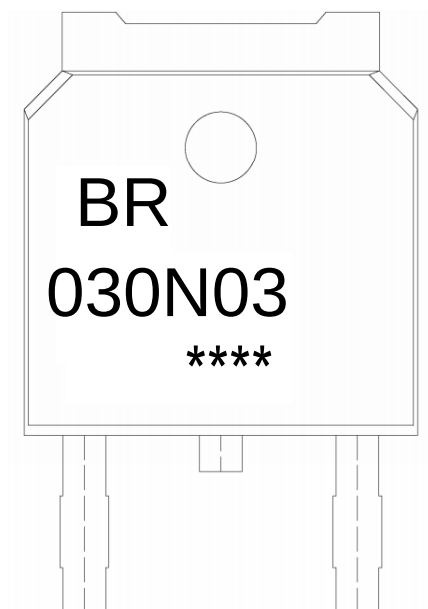

BR


Note:

BR: Company Code

030N03: Product Type Code

****: Lot No. Code, code change with Lot No

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

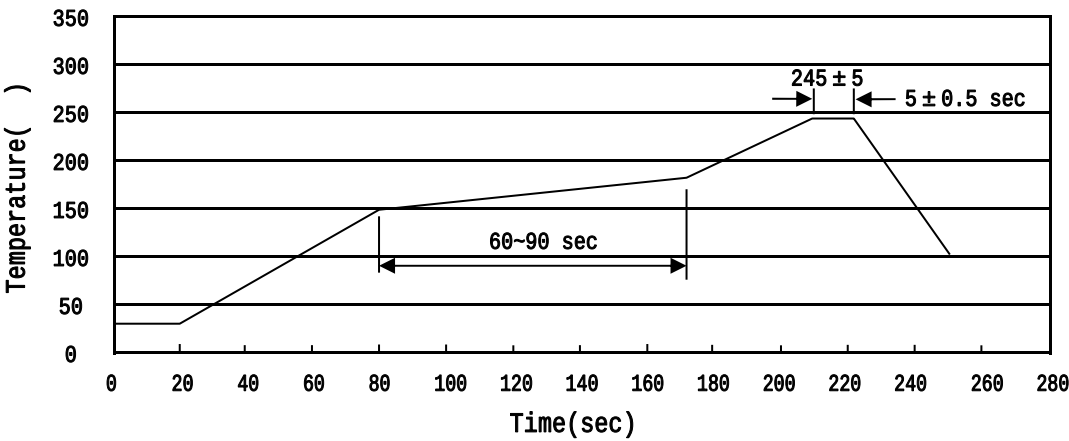

Note:

- | | | | | | |
|---|-----|-----|----|---------|---|
| 1 | 150 | 180 | 60 | 90sec; | 1.Preheating:150~180 , Time:60~90sec. |
| 2 | 245 | 5 | 5 | 0.5sec; | 2.Peak Temp.:245 5 , Duration:5 0.5sec. |
| 3 | | 2 | 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

/ Resistance to Soldering Heat Test Conditions

260 5 10 1 sec. Temp.:260±5℃ Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type	Units					Dimension (unit mm ³)		
	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
TO-252	2,500	2	5,000	6	30,000	13 ×16	360×360×50	380×335×366

/ TUBE

Package Type	Units					Dimension (unit mm ³)		
	Units/Tube	Tubes/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Tube	Inner Box	Outer Box
TO-251/252	75	48	3,600	5	18,000	526×20.5×5.25	555×164×50	575×290×180

/ Notices