
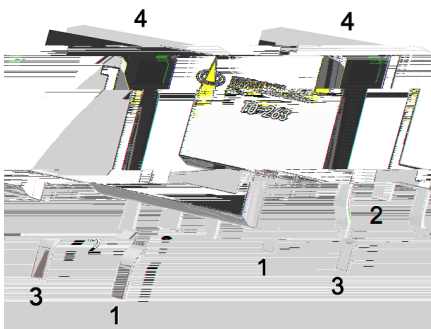


$\leq \quad \Omega \quad \Omega$

BMS







		℃	
			±
		℃	
	≤	θ	
		θ	

Drain-Source Breakdown Voltage						
					±	
						Ω
						Ω



		Ω Ω				

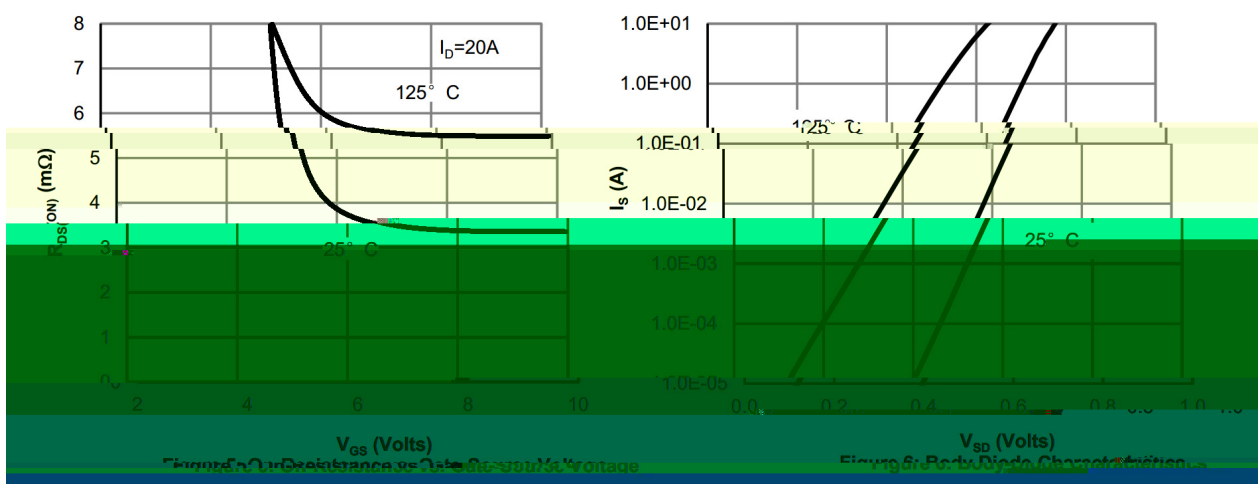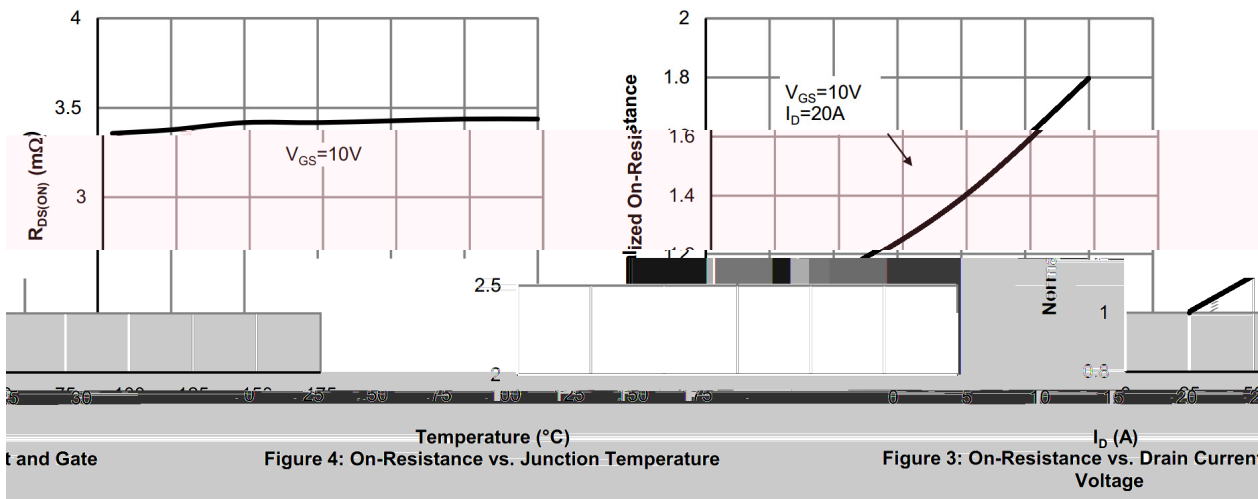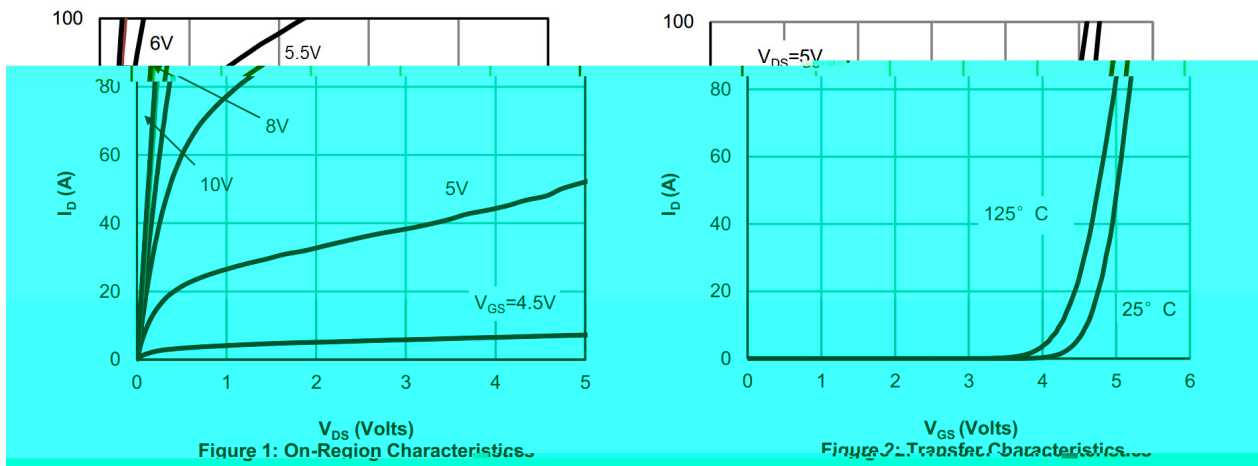

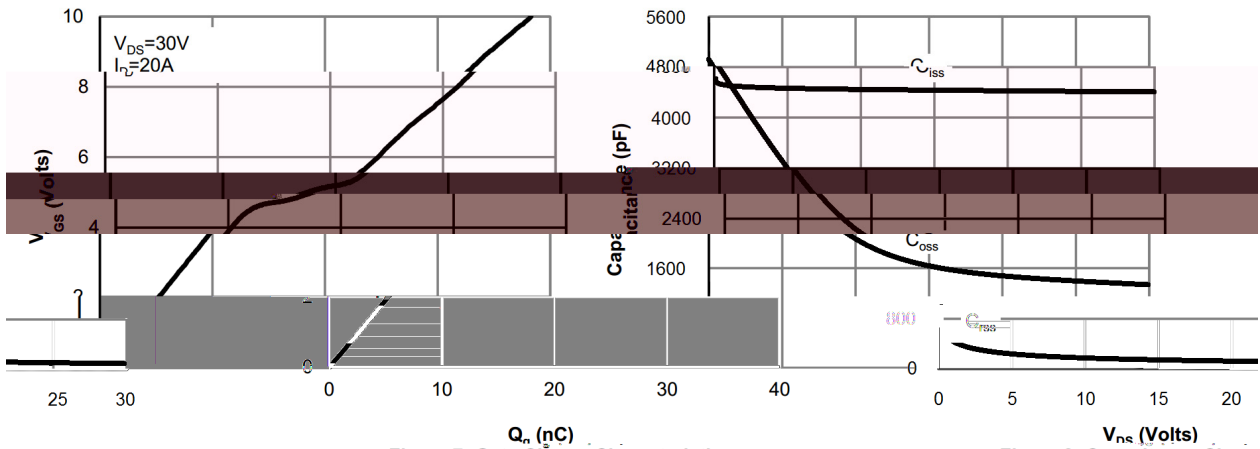

cteristics

Figure 7: Gate-Charge Characteristics

Figure 8: Capacitance Chara

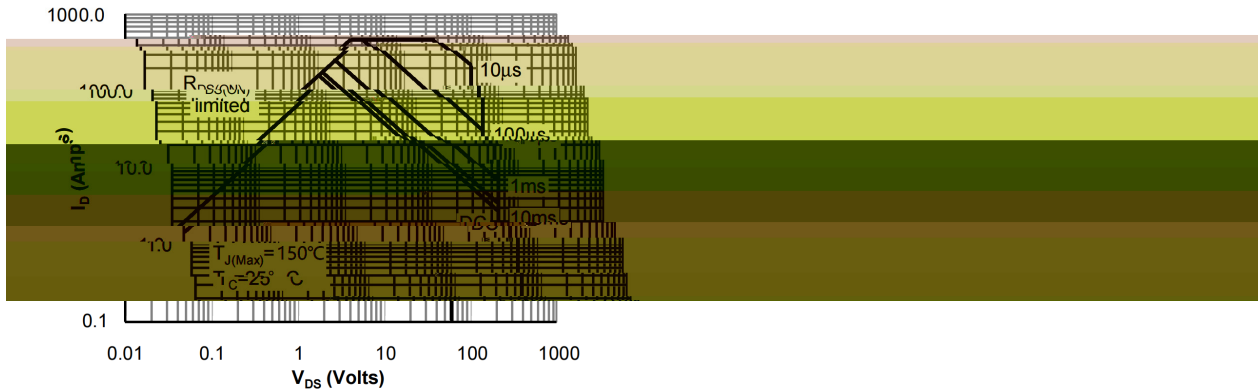


Figure 9: Maximum Forward Biased Safe Operating Area



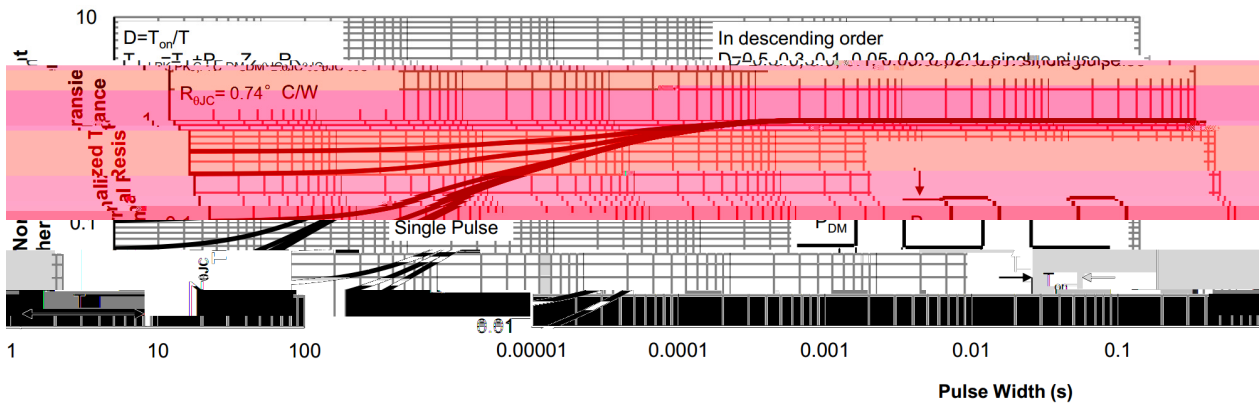


Figure 10: Normalized Maximum Transient Thermal Impedanc



ers er Dimensions In Millimeters Dimensions In Millimet

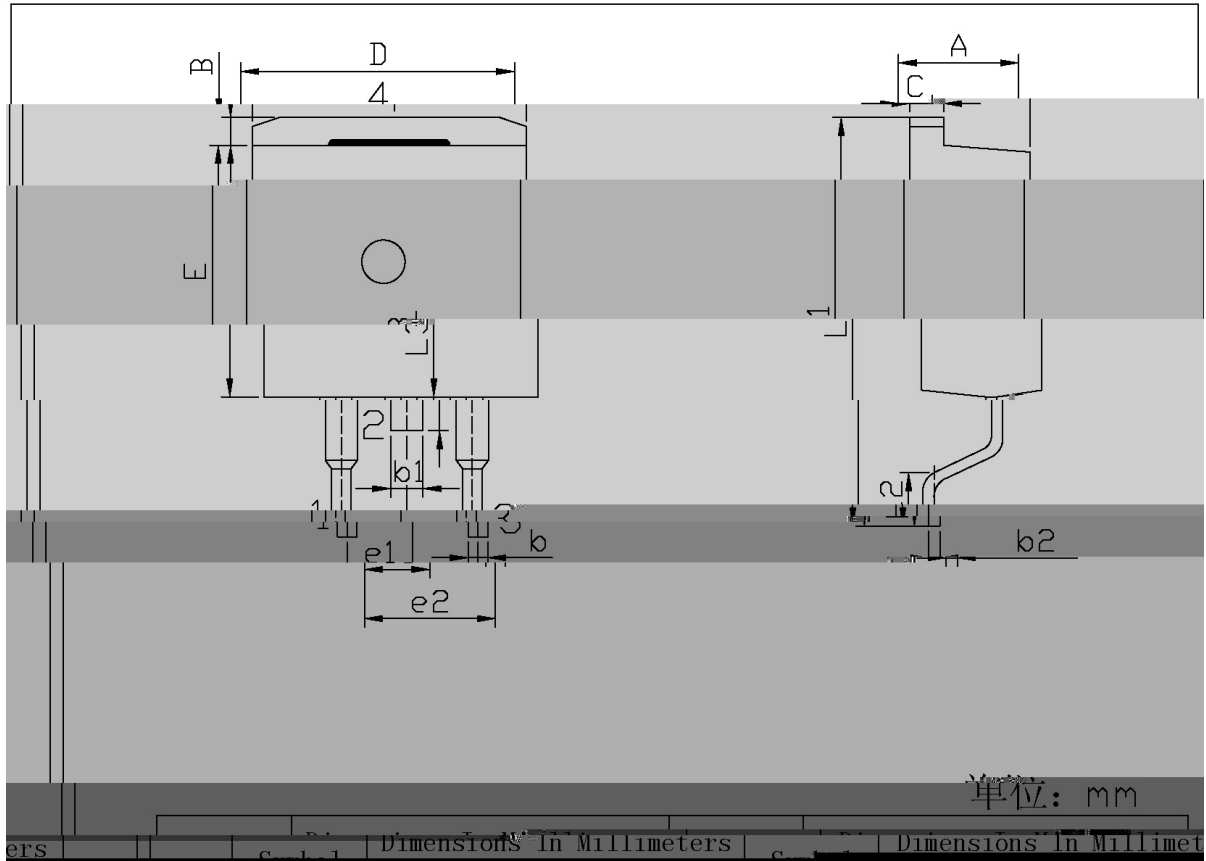


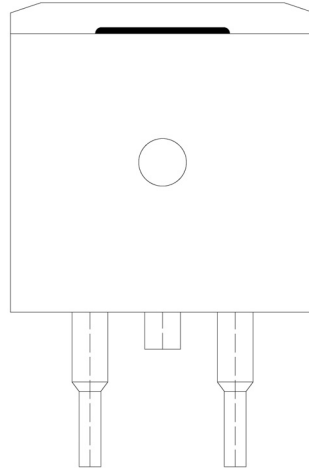

BR

035N06SH

Temperature Profile for IR Reflow Soldering(Pb-Free)

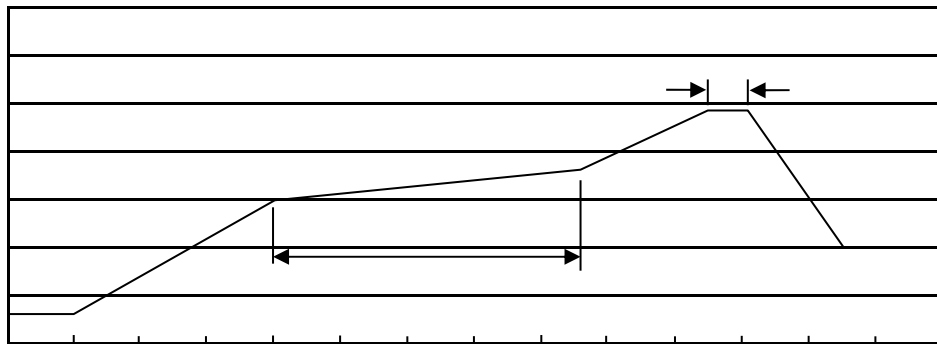

±

±

±

±

±

±

						"		
