


/ Descriptions

x


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning

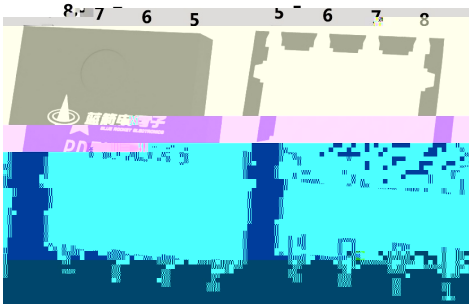




Pin	极性
1	S
2	S
3	S
4	G
5	D
6	D
7	D
8	D

/ Marking

[illegible][illegible]

/ Electrical Characteristics(Ta=25)

/ Electrical Characteristic Curve

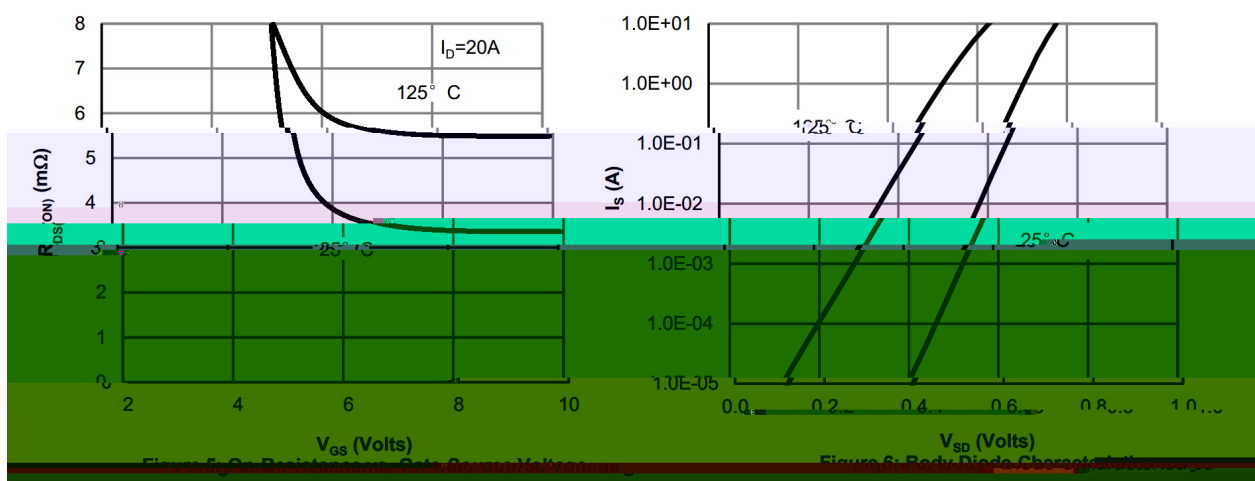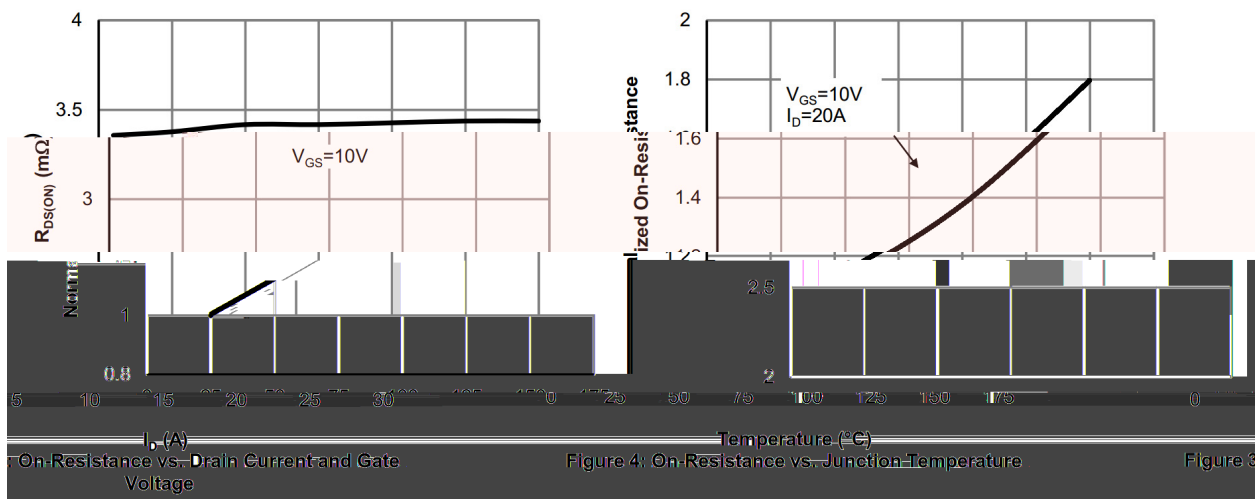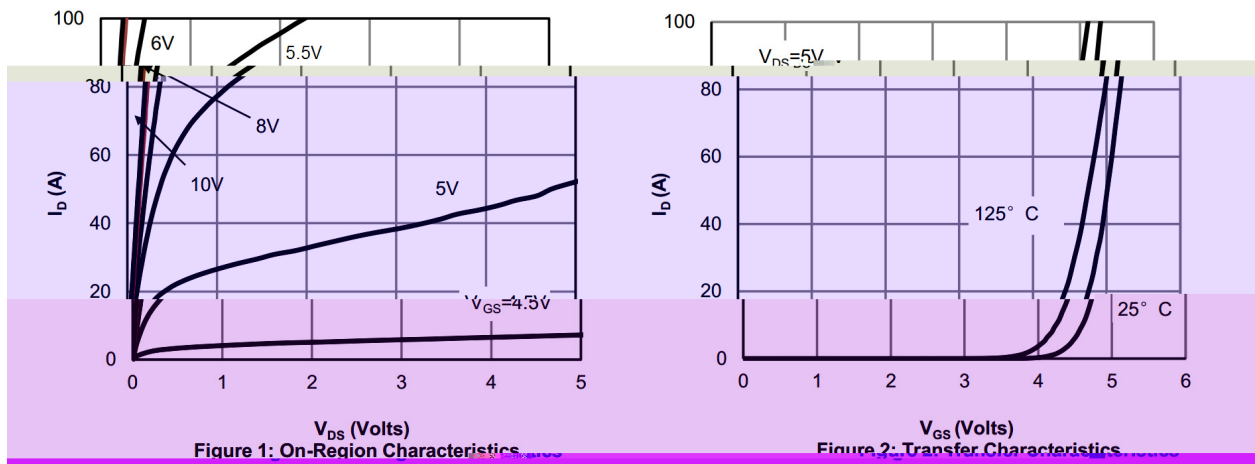

/ Electrical Characteristic Curve



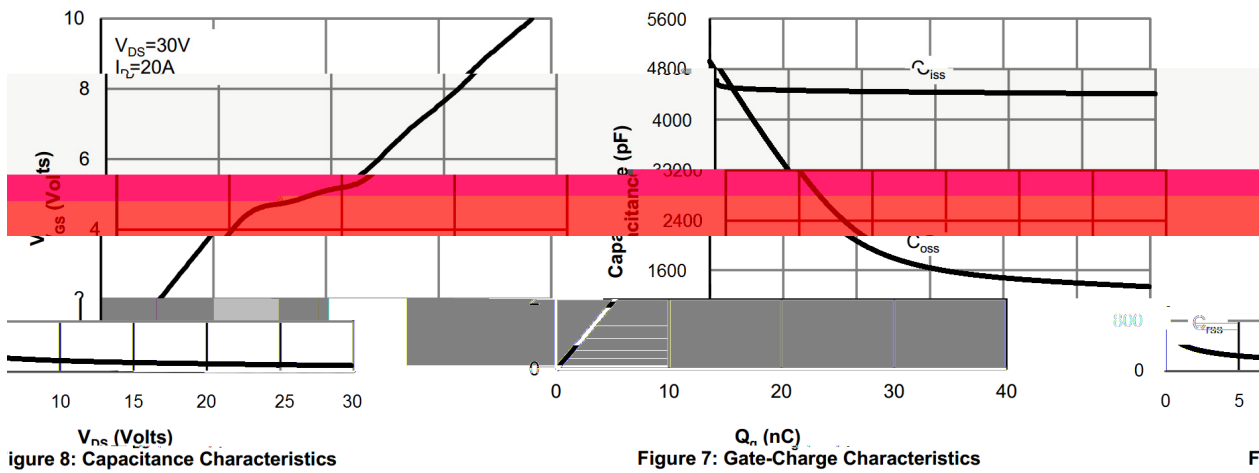


Figure 8: Capacitance Characteristics

Figure 7: Gate-Charge Characteristics


F

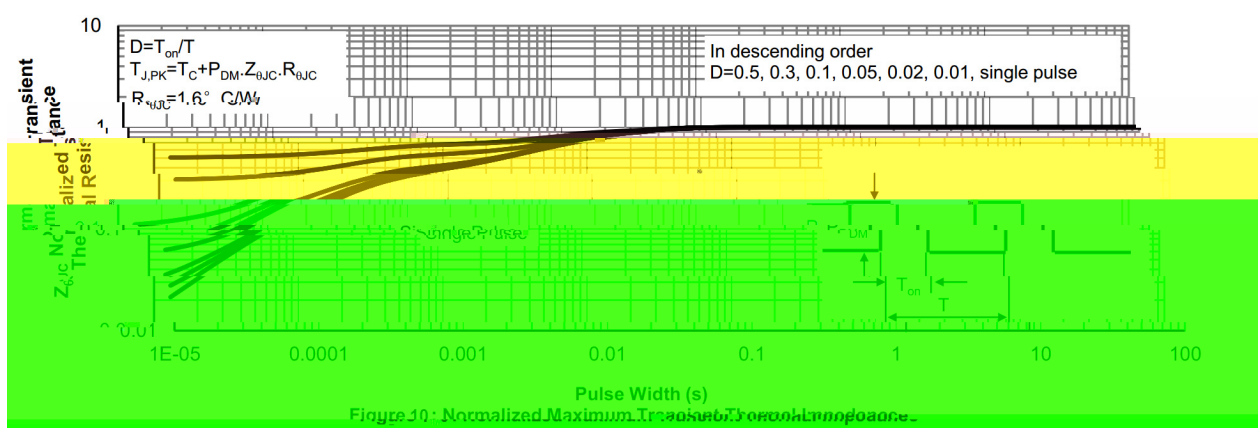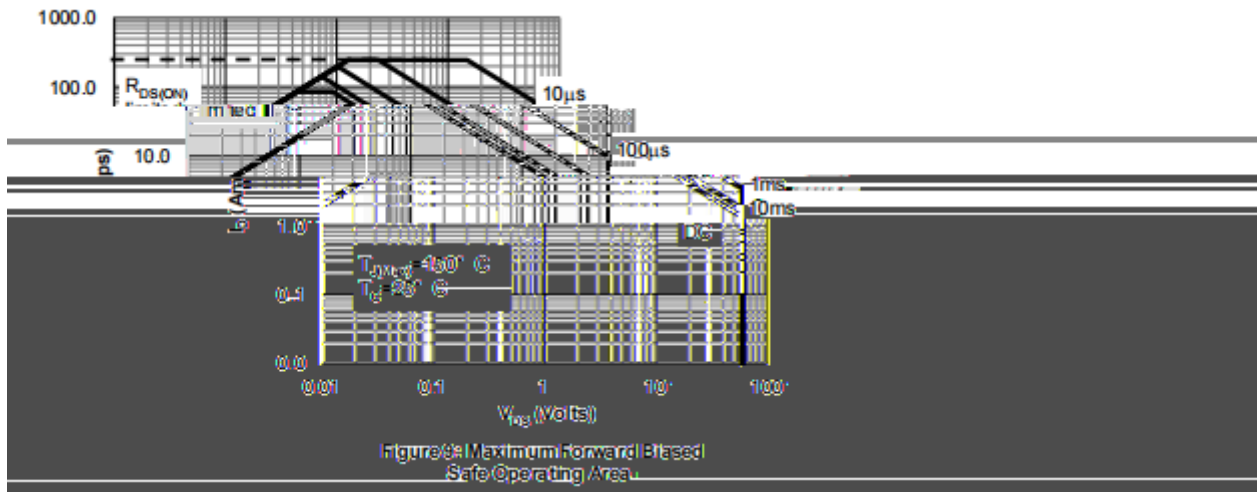

/ Package Dimensions


PDFN5 X6

Unit:mm

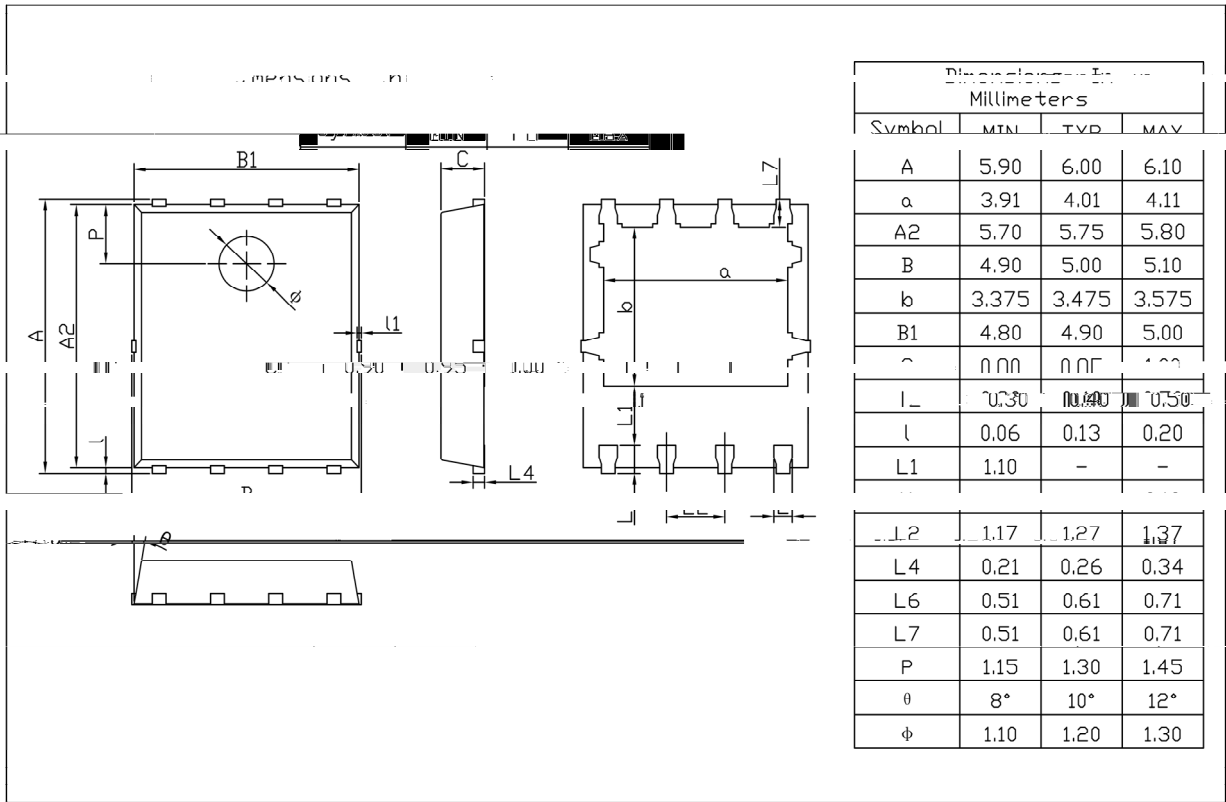


Rev.01 202209

/ Marking Instructions

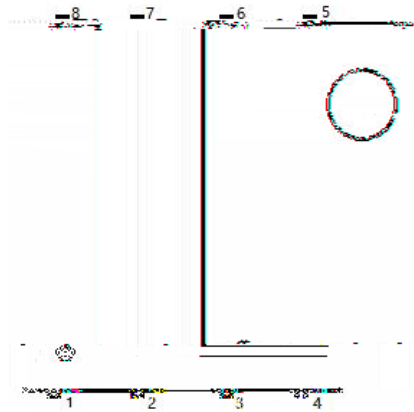

BR

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

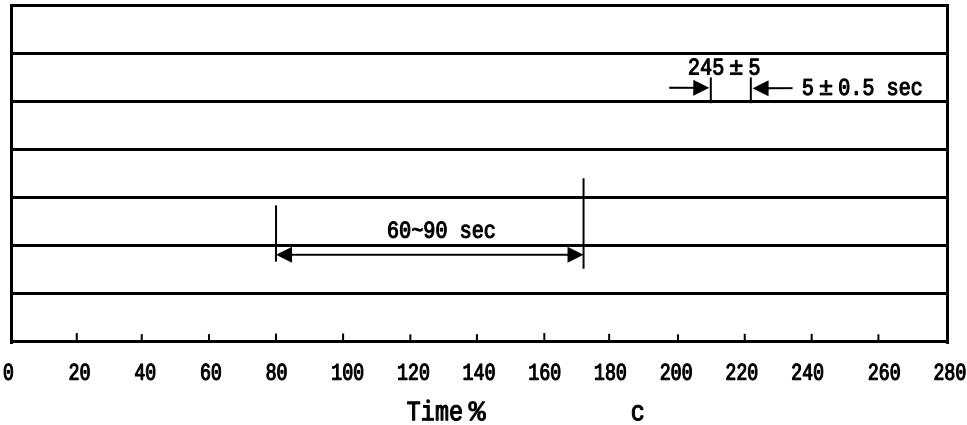

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box

/ Notices