

/ Descriptions

PDFN3×3A-8L                      N                      MOS

x



/ Features

±

≤

≤

/

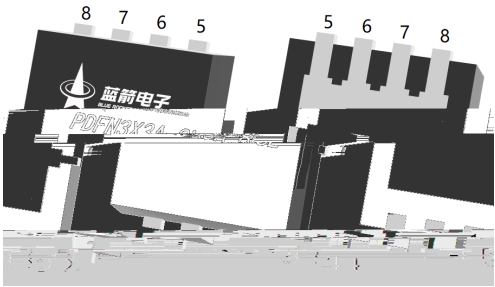

/ Marking

/ Absolute Maximum Ratings(Ta=25 )

|  |   |   |   |  |
|--|---|---|---|--|
|  |   |   |   |  |
|  |   |   |   |  |
|  |   | ℃ |   |  |
|  |   |   |   |  |
|  |   |   | ± |  |
|  |   |   |   |  |
|  |   |   |   |  |
|  |   | ℃ |   |  |
|  |   |   |   |  |
|  | ≤ | θ |   |  |
|  |   |   |   |  |
|  |   | θ |   |  |

/ Electrical Characteristics(Ta=25 )

|  |  |   |  |  |  |   |
|--|--|---|--|--|--|---|
|  |  |   |  |  |  |   |
|  |  | μ |  |  |  |   |
|  |  |   |  |  |  | μ |
|  |  |   |  |  |  | μ |
|  |  | μ |  |  |  |   |
|  |  |   |  |  |  |   |
|  |  |   |  |  |  | Ω |
|  |  |   |  |  |  | Ω |
|  |  |   |  |  |  | Ω |
|  |  |   |  |  |  |   |
|  |  |   |  |  |  |   |
|  |  |   |  |  |  |   |




BRCS040N03YB






DATA SHEET

|  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|
|  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|

## I Electrical Characteristic Curve

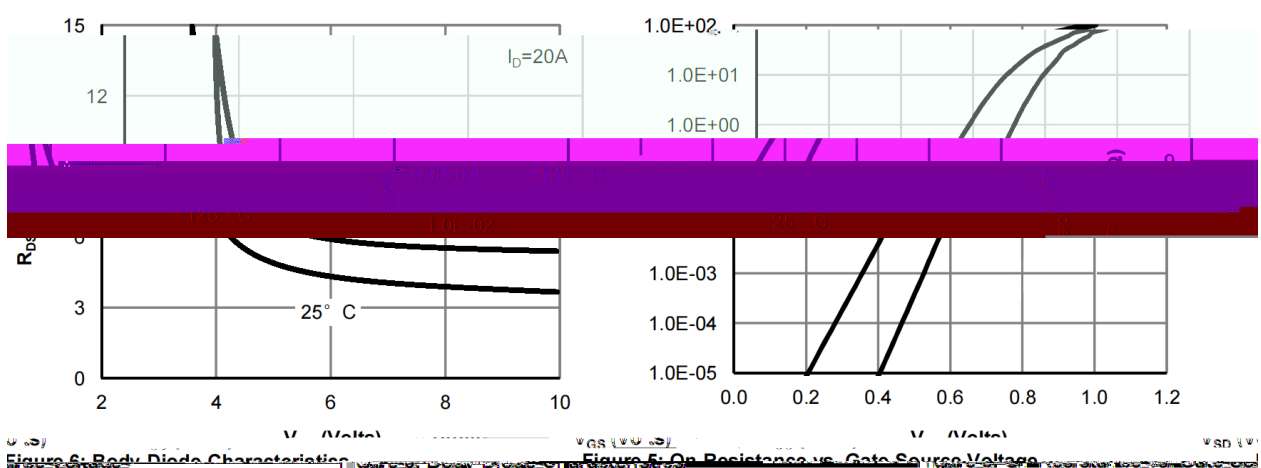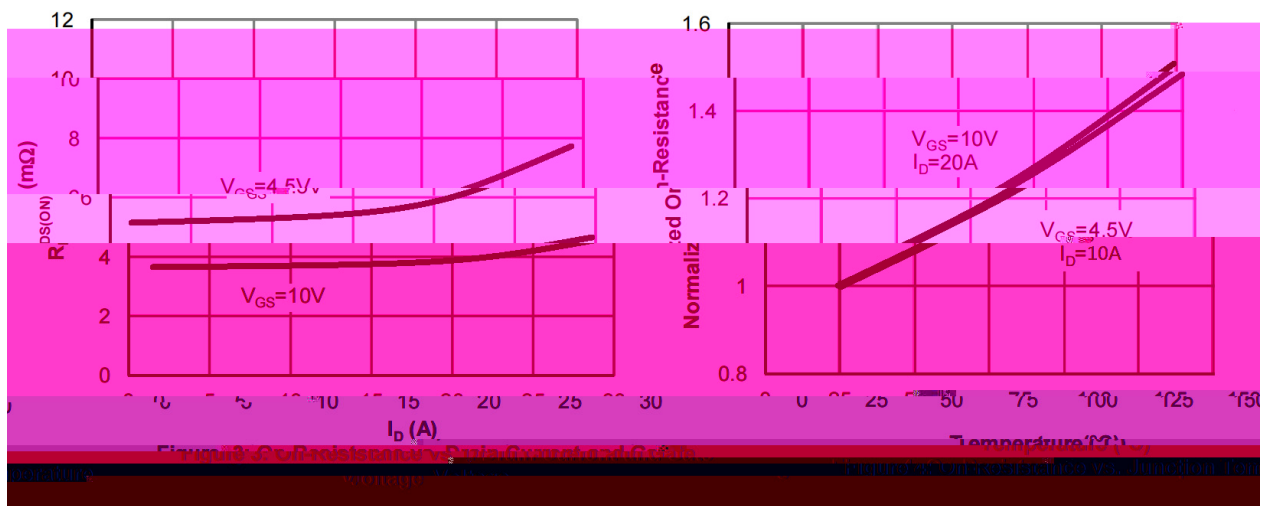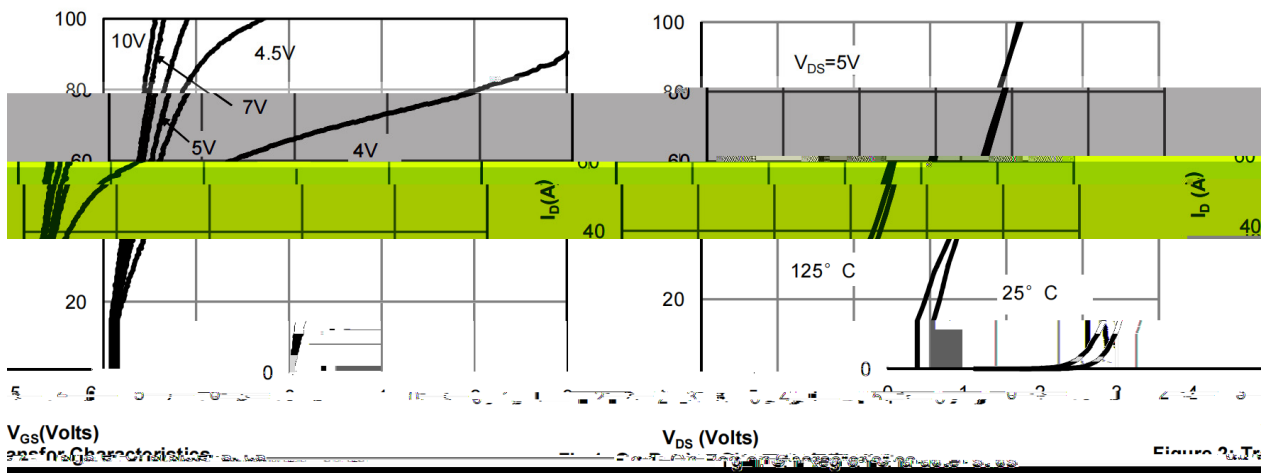


## / Electrical Characteristic Curve

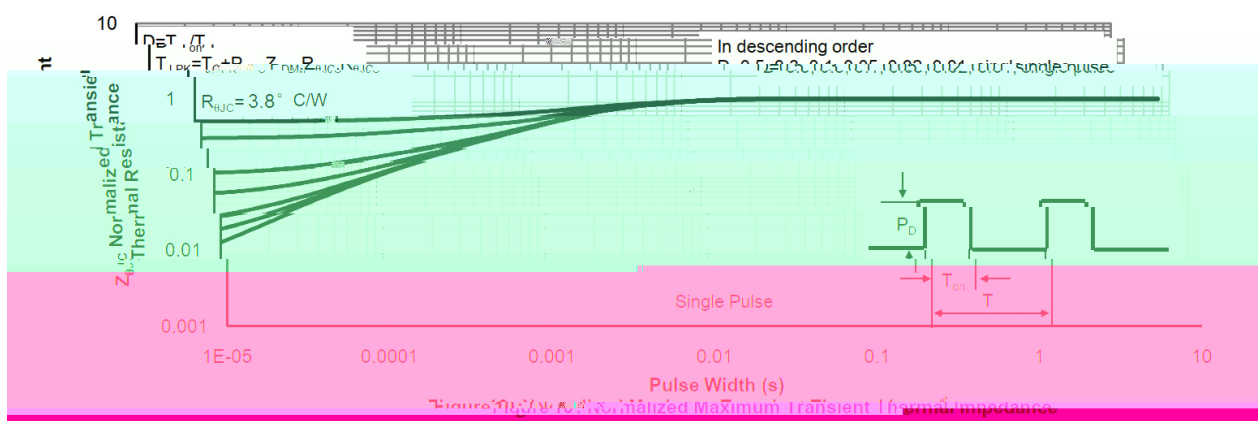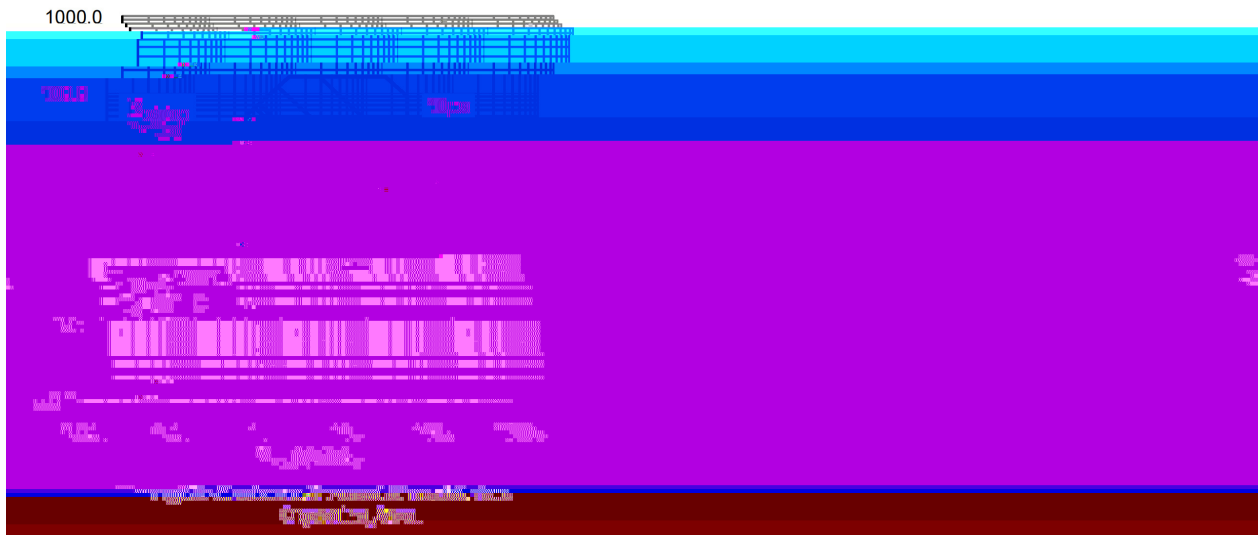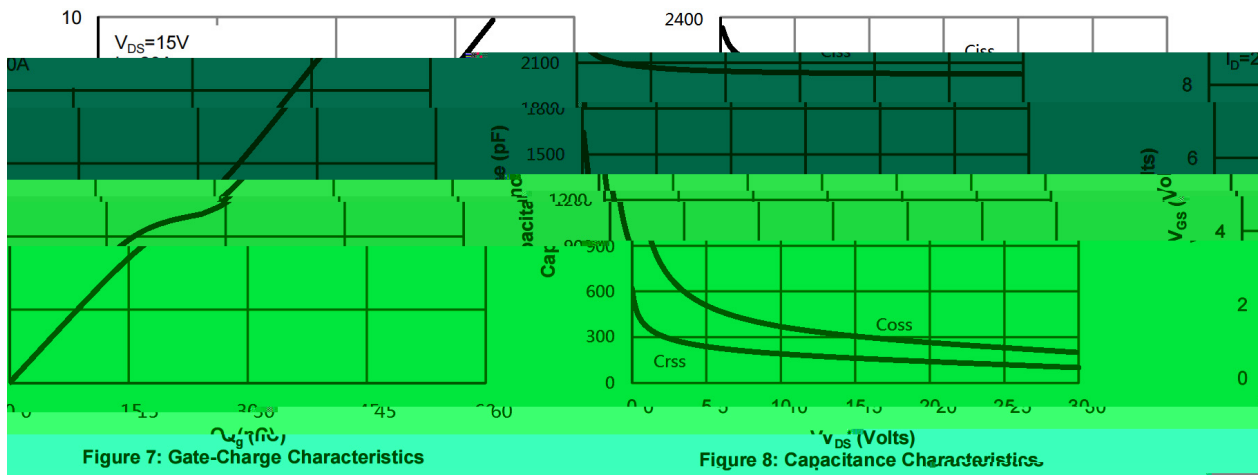

/ Package Dimensions


PDFN3X3A-8L

Unit:mm

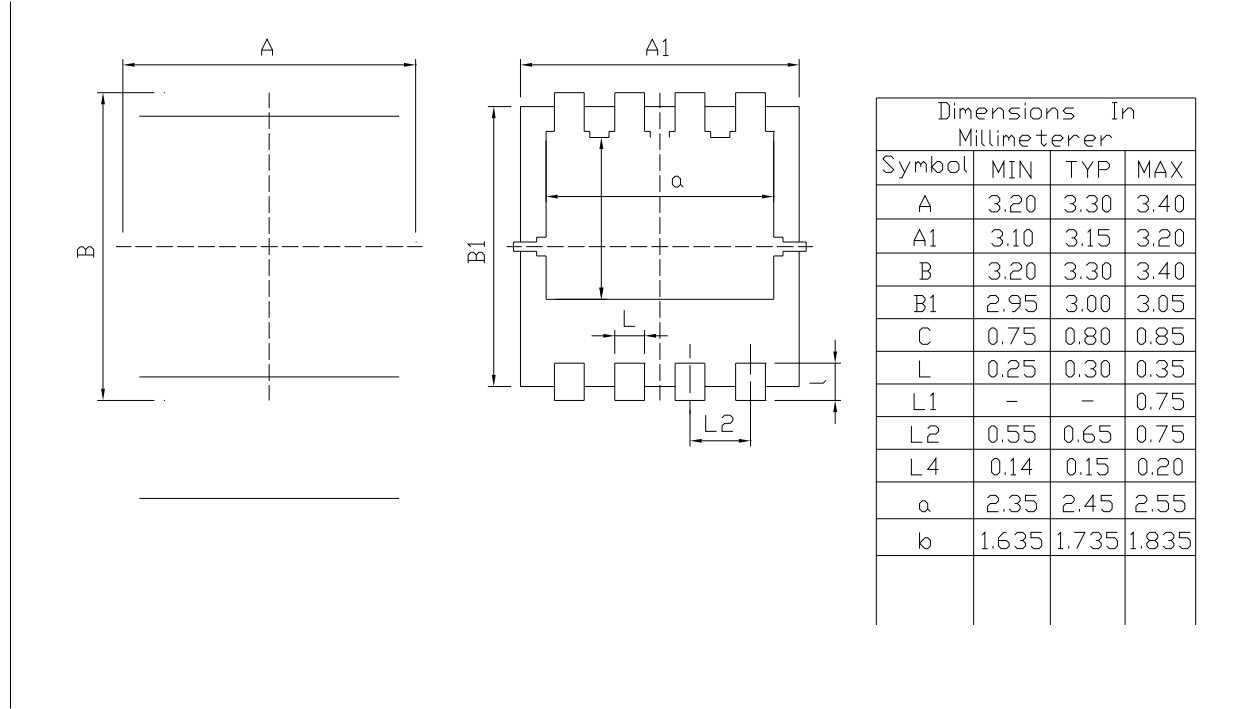


Rev.00 202011

/ Marking Instructions

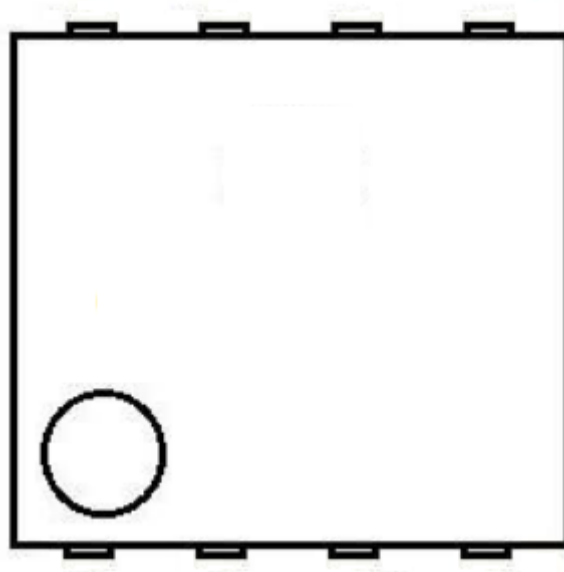

\*\*\*\*

(     ) / Temperature Profile for IR Reflow Soldering(Pb-Free)

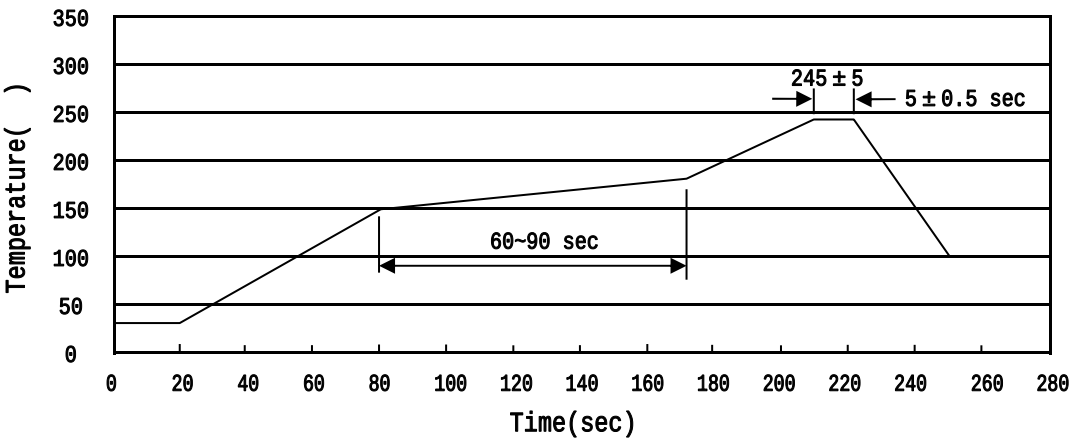

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

|  |  |  |  |  |  |   |  |  |
|--|--|--|--|--|--|---|--|--|
|  |  |  |  |  |  |   |  |  |
|  |  |  |  |  |  |   |  |  |
|  |  |  |  |  |  | " |  |  |

/ Notices