



x

Ω
 Ω

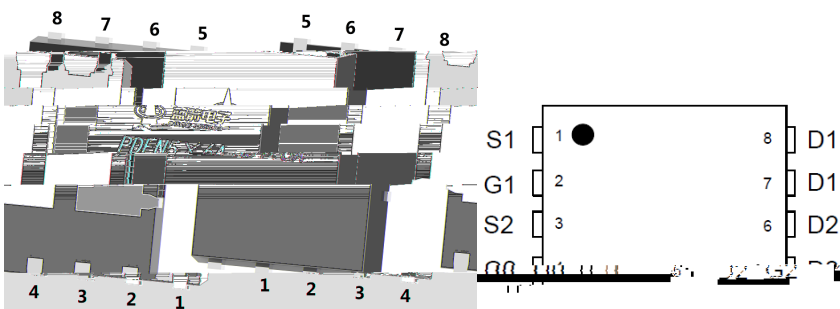

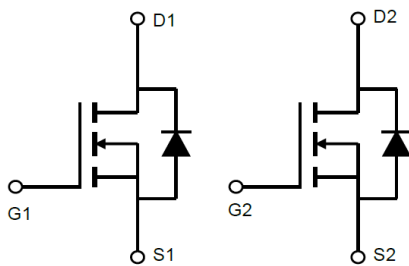

	≤	θ		



		μ				
						μ
						μ
		μ				
						Ω
						Ω
						Ω



		Ω Ω				

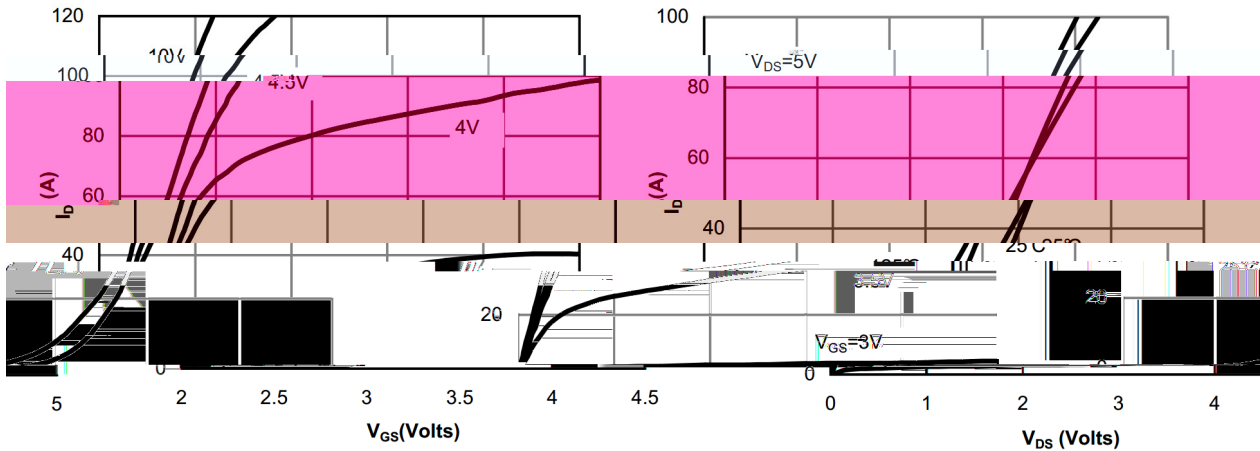


Figure 2: Transfer Characteristics

Figure 3: On-Resistance Characteristics

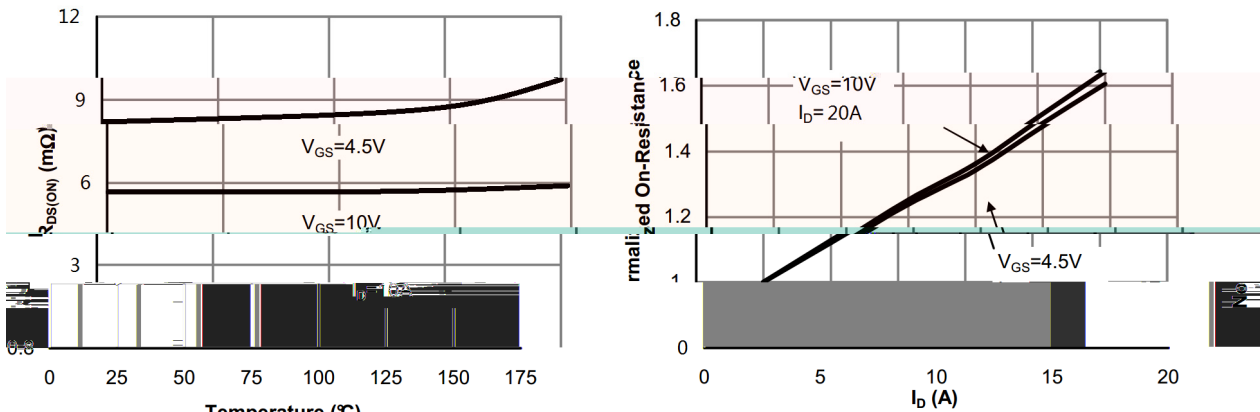


Figure 4: On-Resistance vs. Junction Temperature

Figure 3: On-Resistance vs. Drain Current and Gate




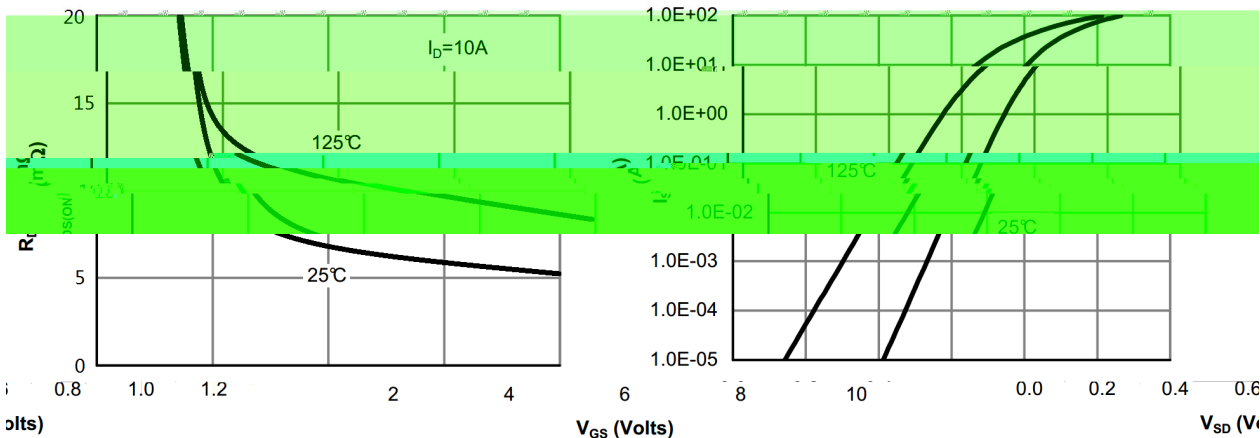


Figure 5: On-Resistance vs. Gate-Source Voltage


Figure 5: On-Resistance vs. Gate-Source Voltage

Figure 6: Body-Diode

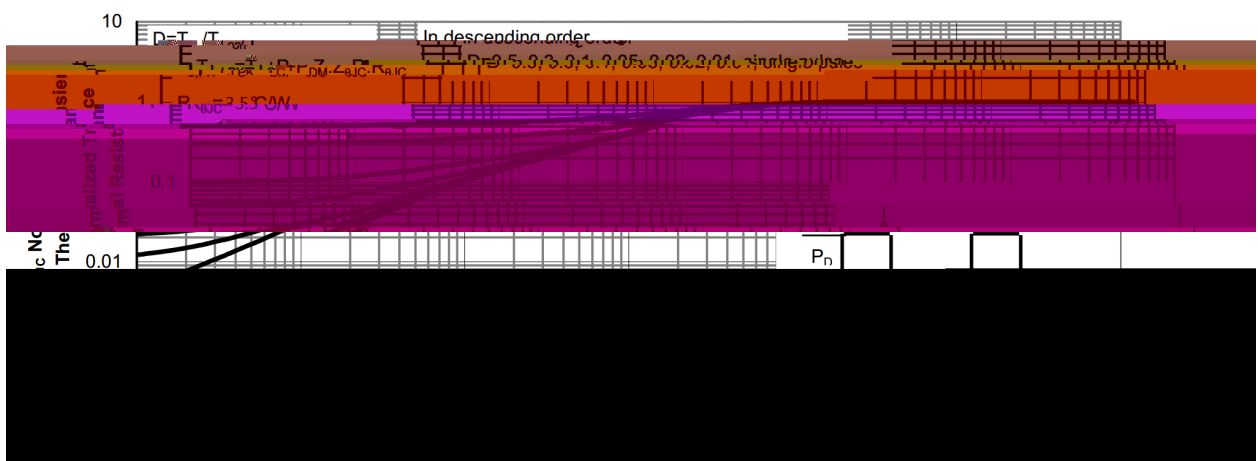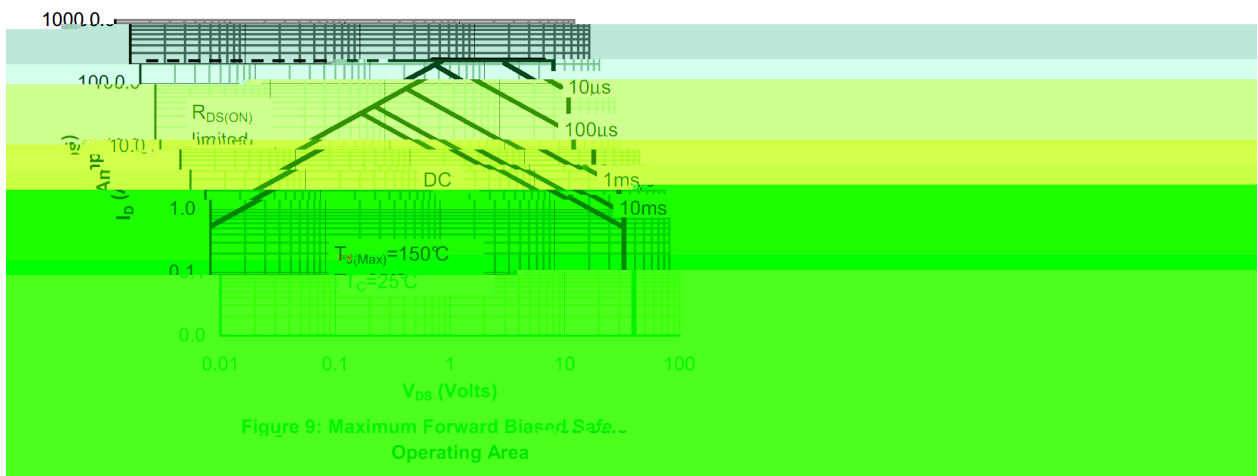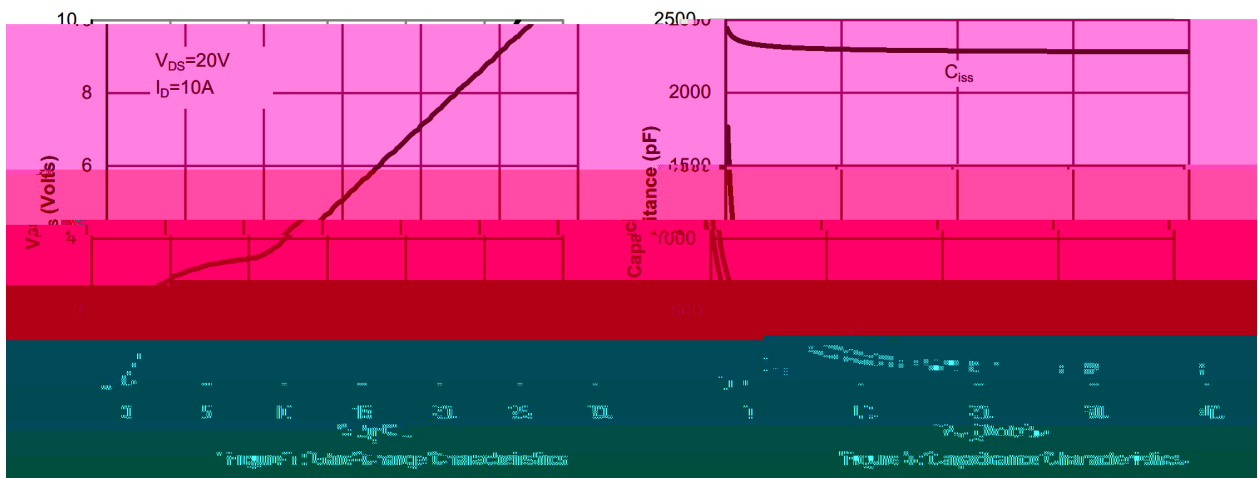


PDFN5 X6A

Unit:mm

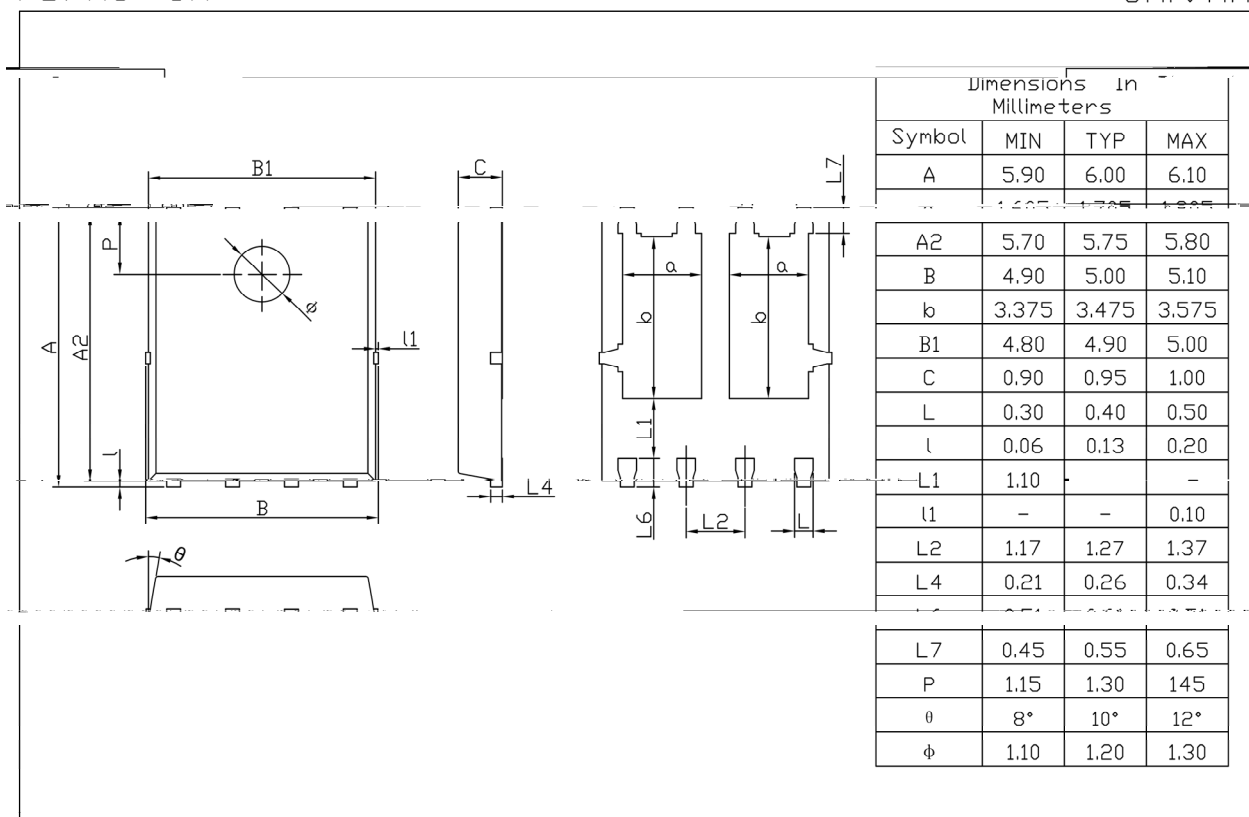


Rev.01 202209

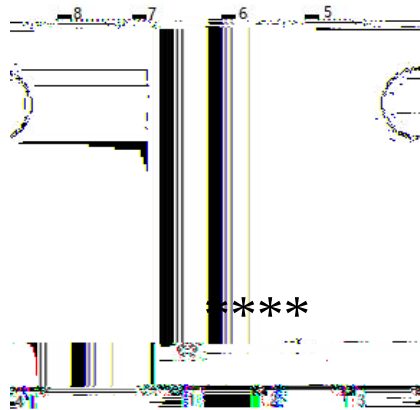

BR

Temperature Profile for IR Reflow Soldering(Pb-Free)

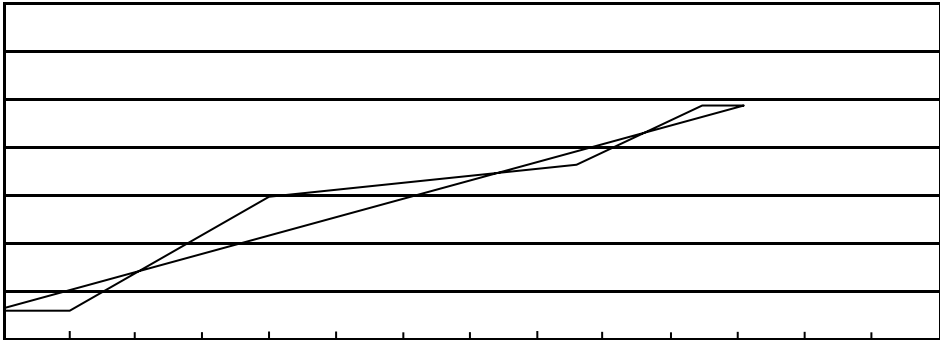

± ± ± ±

± ± ± ±

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box