

BRCS070N06SHRA

/ Absolute Maximum Ratings(Ta=25)







		θ		
		θ		

/ Electrical Characteristics(Ta=25)

					$\pm$	
						Ω
						Ω
						Ω

/ Electrical Characteristics(Ta=25)

/ Electrical Characteristic Curve

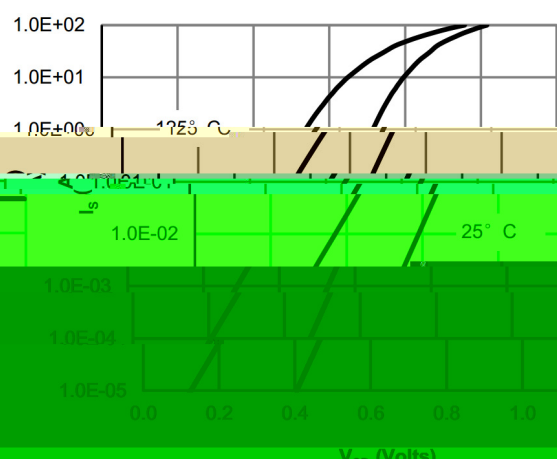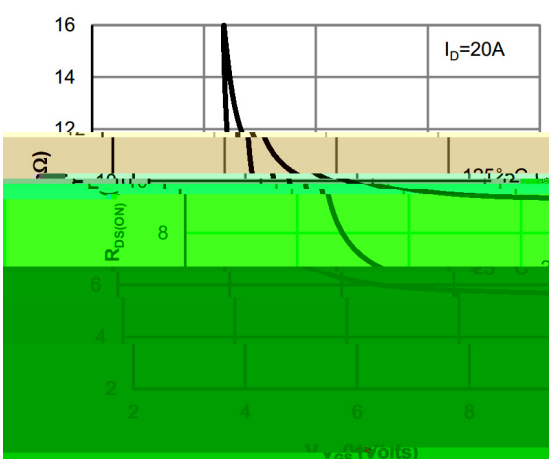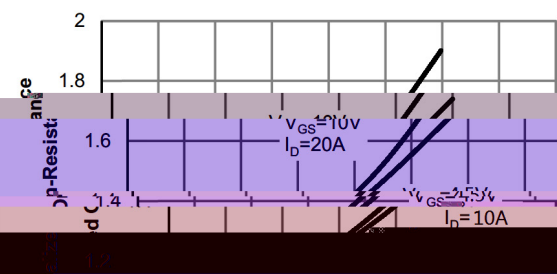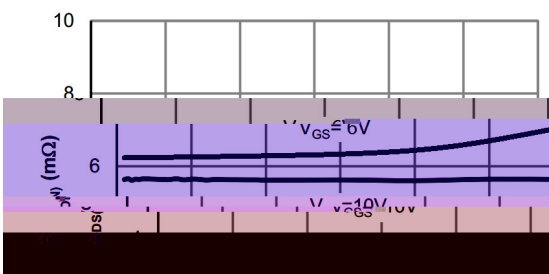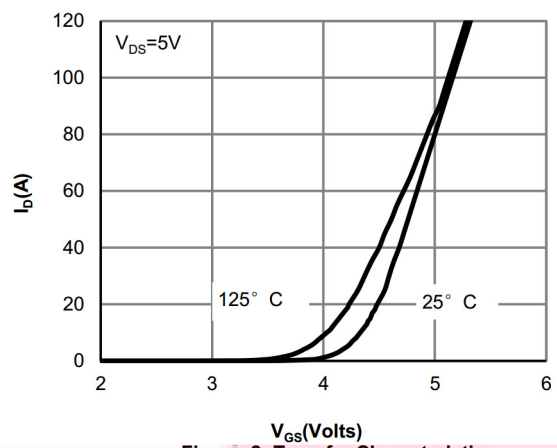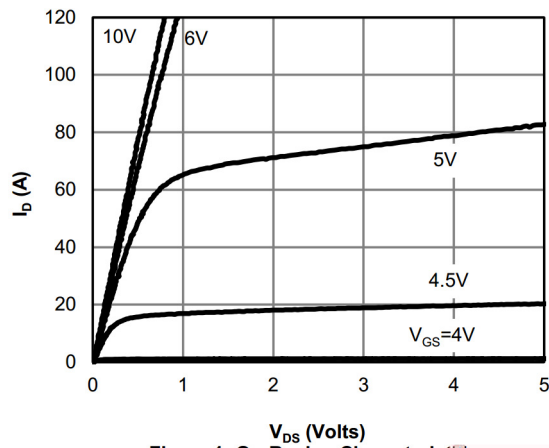

/ Electrical Characteristic Curve


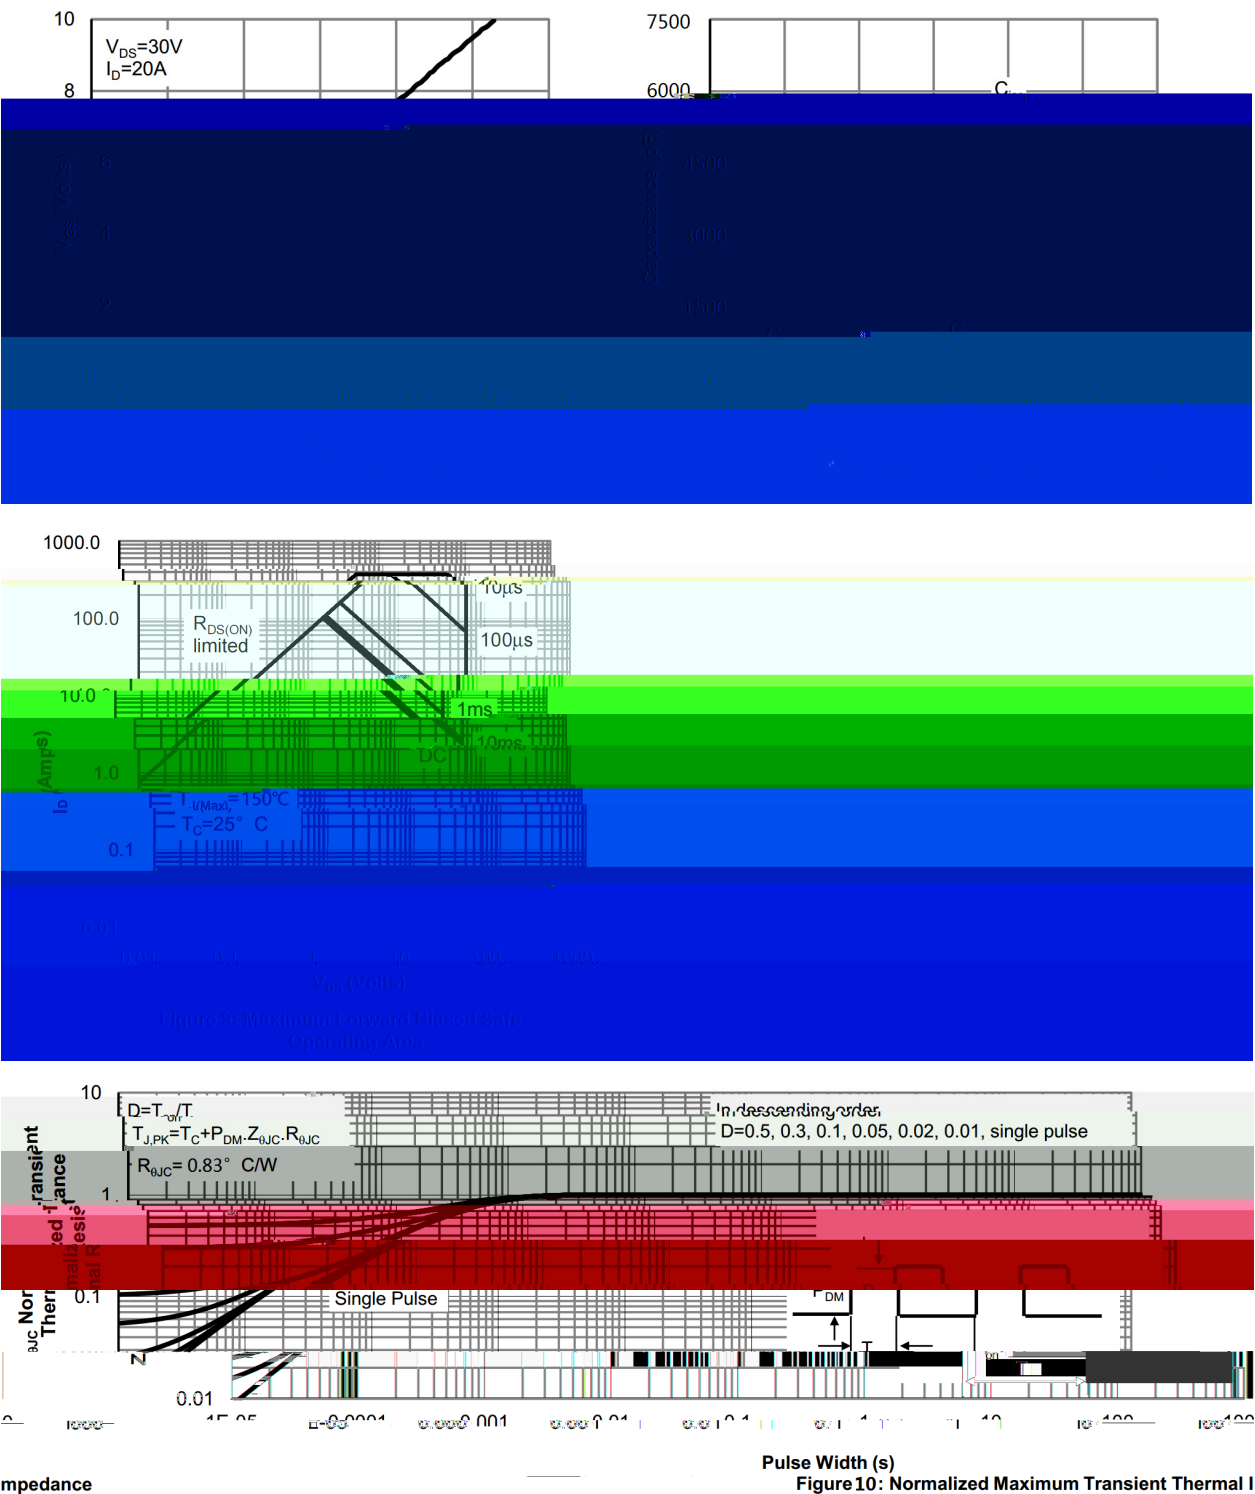


Figure10: Normalized Maximum Transient Thermal I

/ Package Dimensions


T0-220

单位: mm

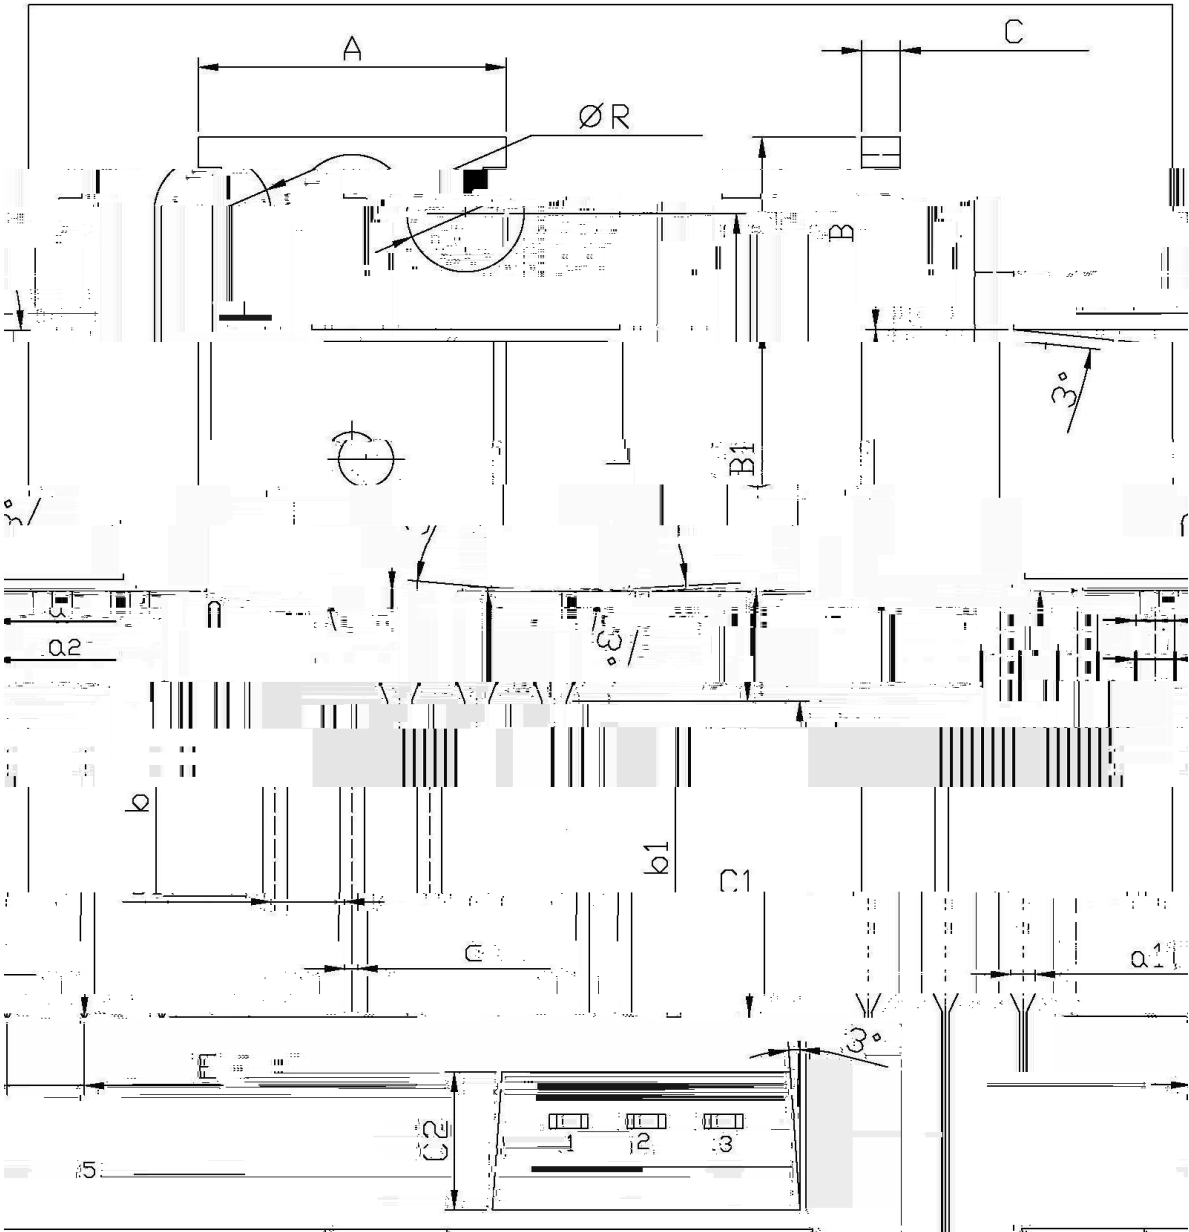

Dimensions In Millimeters			Dimensions In Millimeters		
Symbol	Min	Max	Symbol	Min	Max
A	9.8	10.2	C	12	14
R	3.56	3.64	B	6.3	6.7
L	15.7	16.1	B1	9.0	9.4
b	12.6	13.6	C1	P.P	P.P

/ Marking Instructions

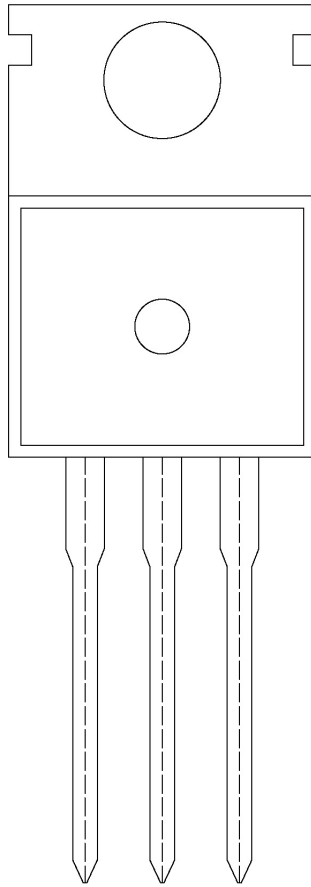

BR

070N06SH
