

$\leq$	Ω	Ω
$\leq$	Ω	Ω

		°C		
			±	
		°C		
		θ		
		θ		




--	--	--	--	--	--	--

Drain-Source Breakdown Voltage




/ Electrical Characteristics(Ta=25)

		Ω Ω				


/ Electrical Characteristic Curve

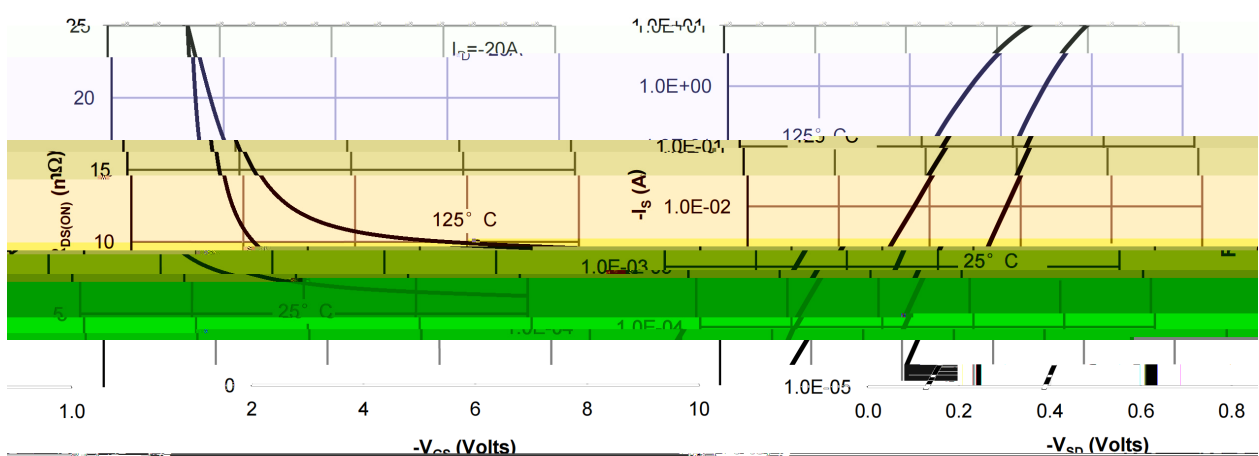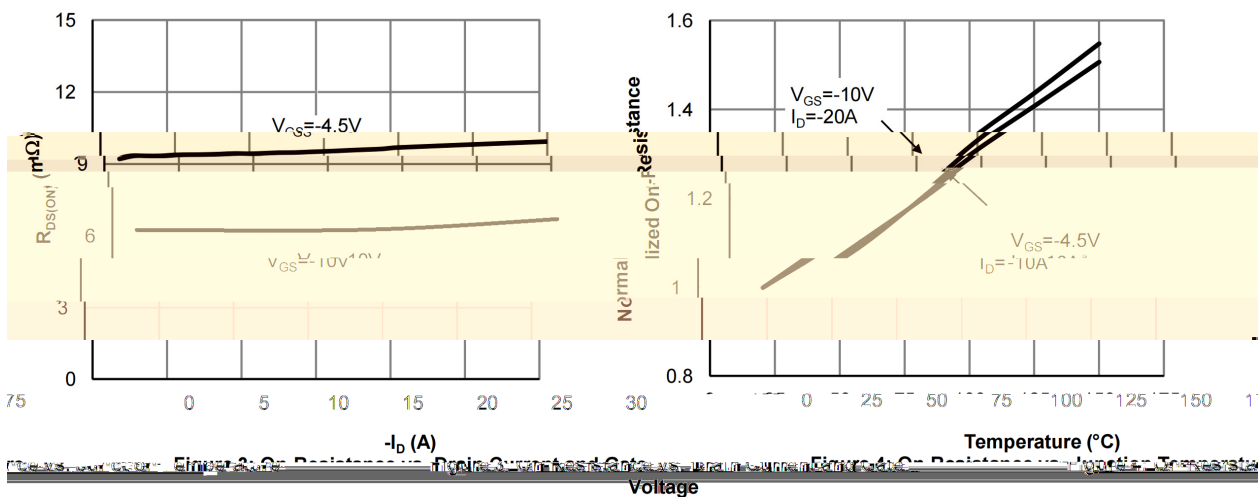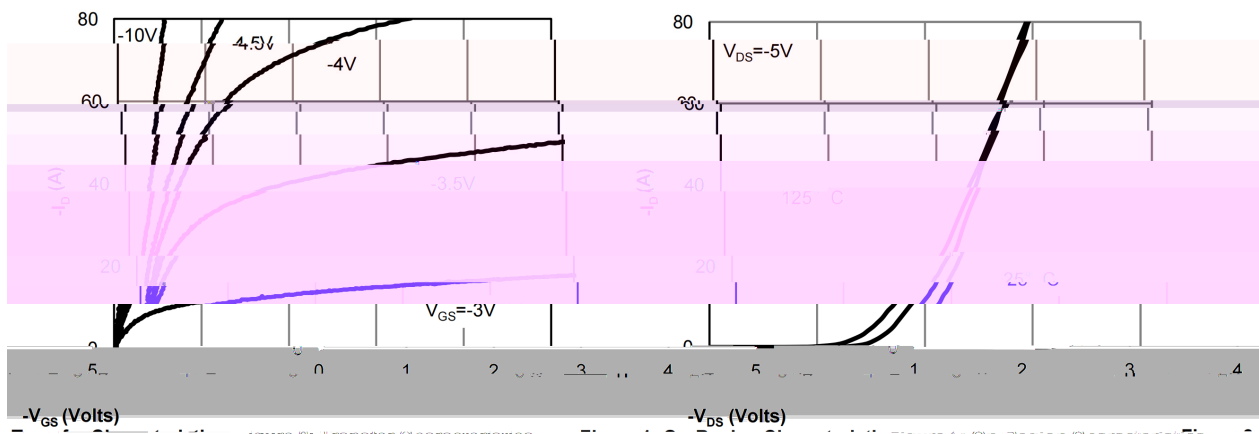


/ Electrical Characteristic Curve

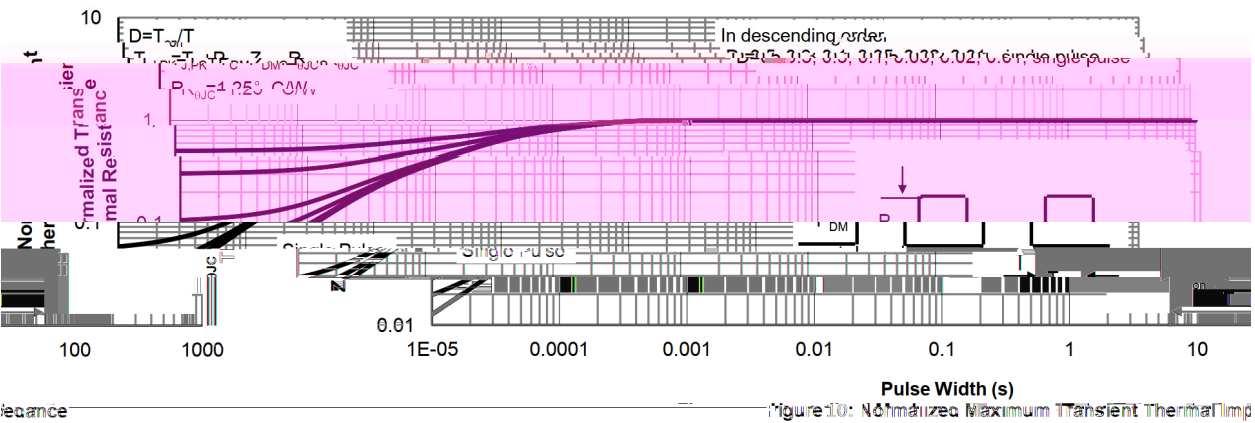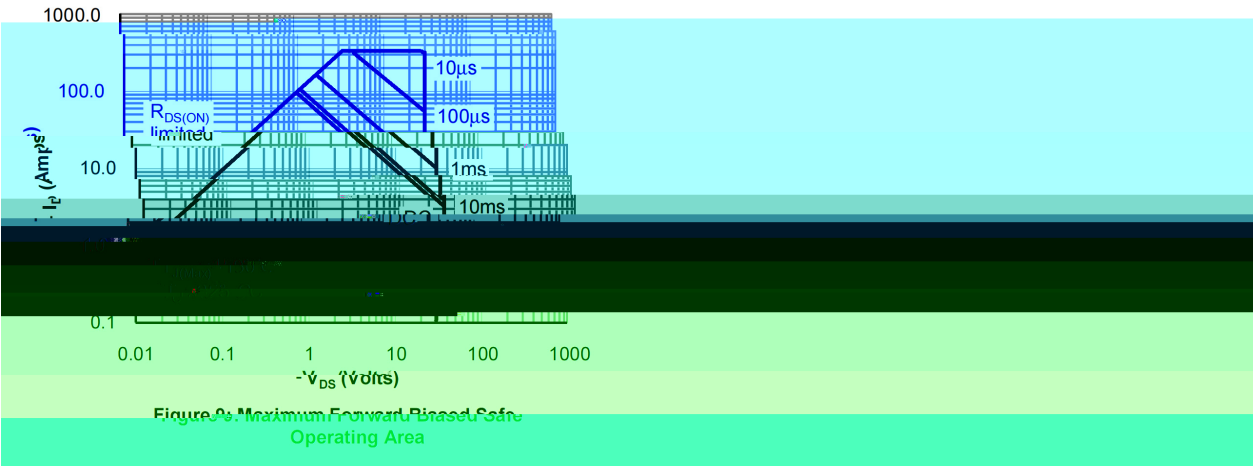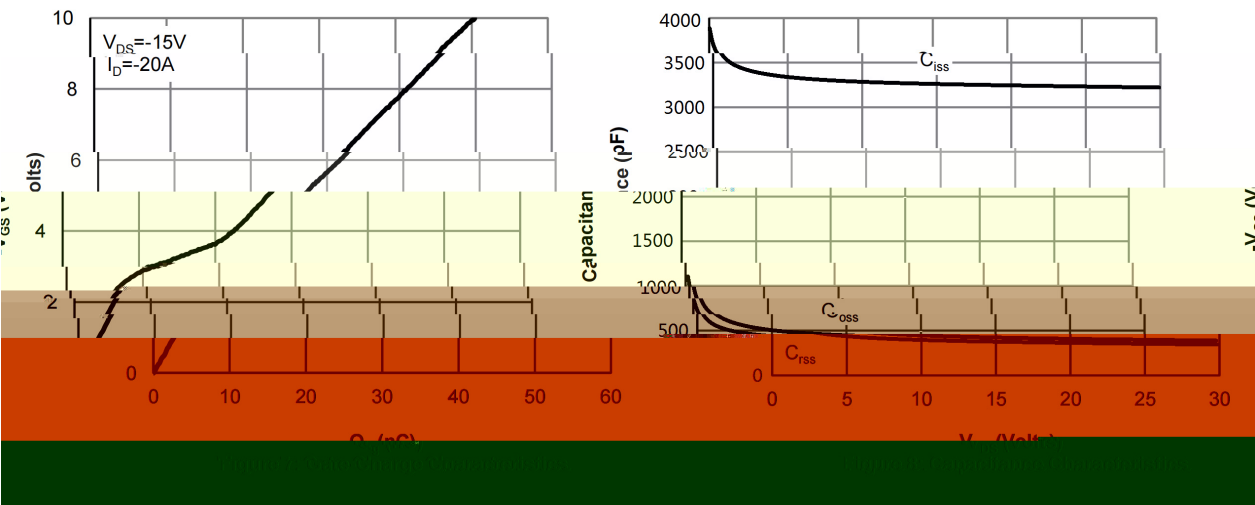

/ Package Dimensions

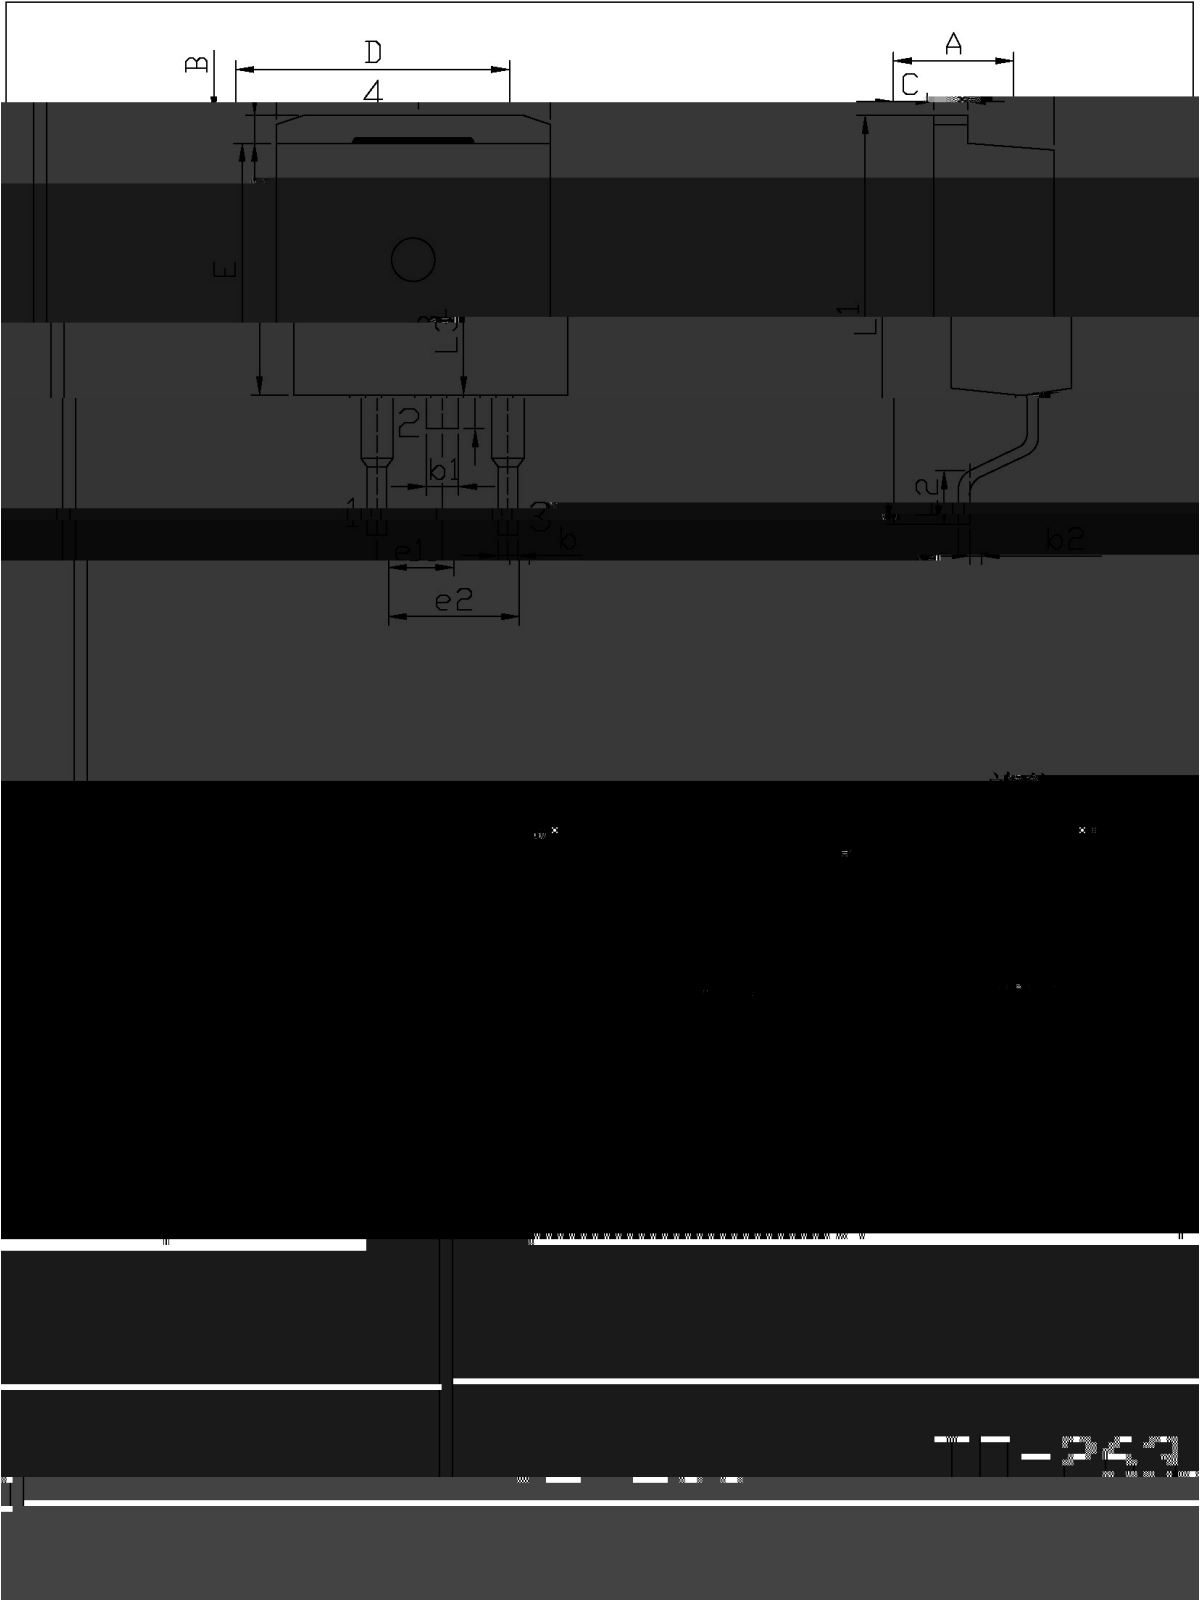


/ Marking Instructions

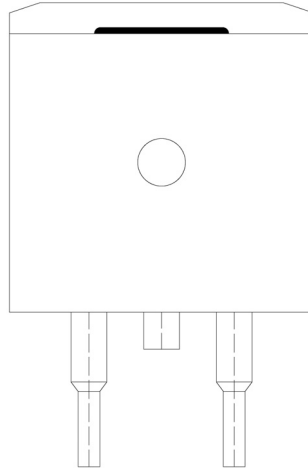

BR

070P03

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

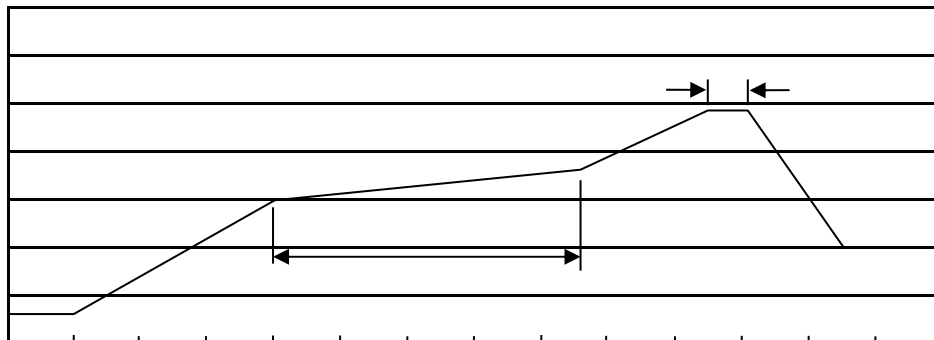 $\pm$ $\pm$ $\pm$ $\pm$

/ Resistance to Soldering Heat Test Conditions

 $\pm$ $\pm$

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box
						"		

	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box

/ Notices