



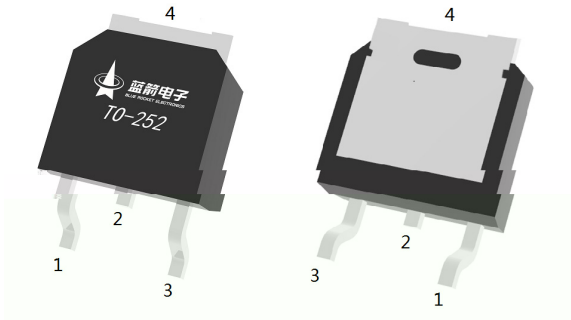



			±		
	≤	R _{θJA}			/ W
		R _{θJC}			

					±	

,S

--	--	--	--	--	--	--

Ω

Ω

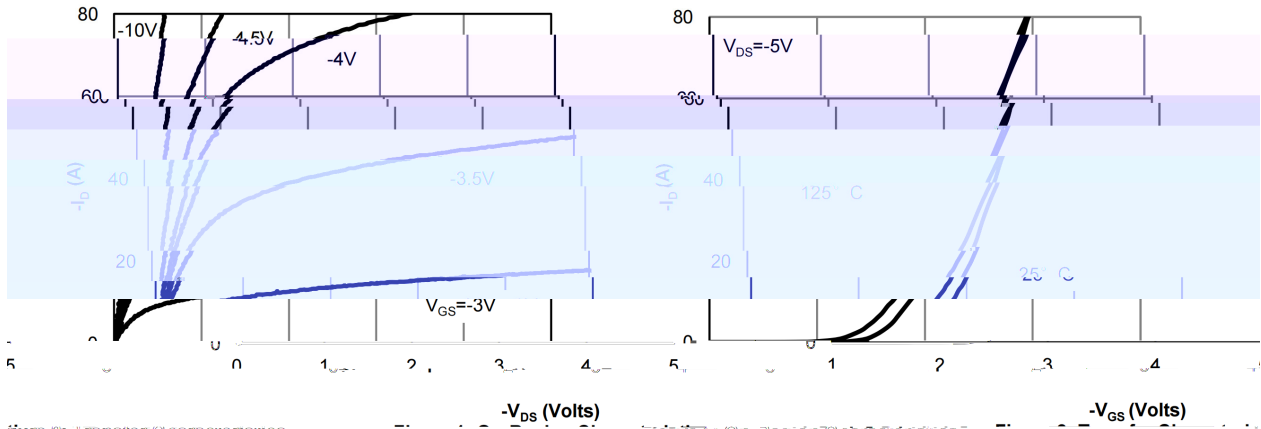


Figure 2: Transfer Characteristics

Figure 3: On-Resistance Characteristics


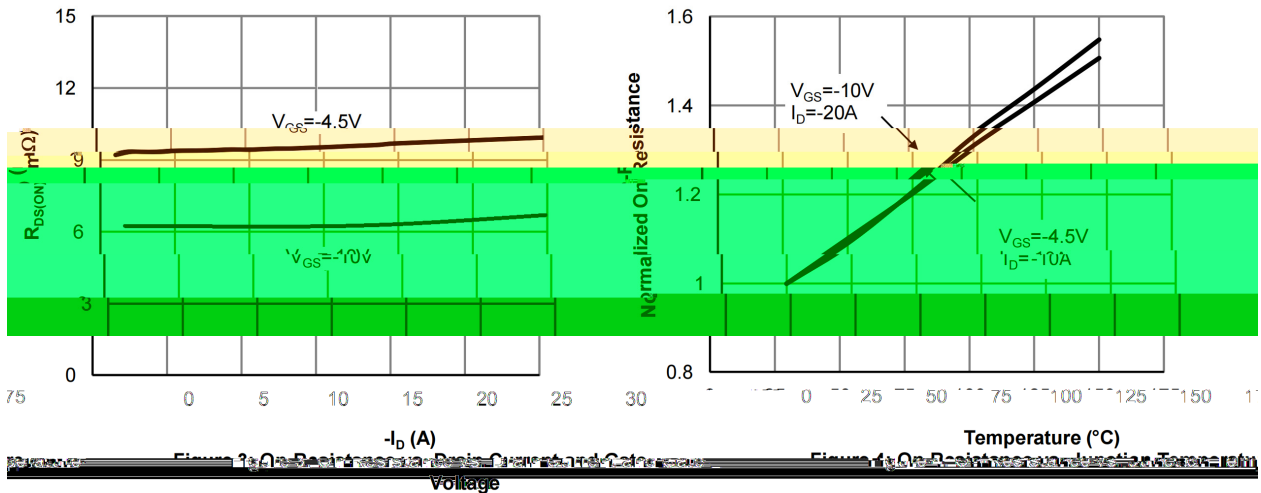


Figure 3: On-Resistance Characteristics

Figure 4: On-Resistance vs. Temperature

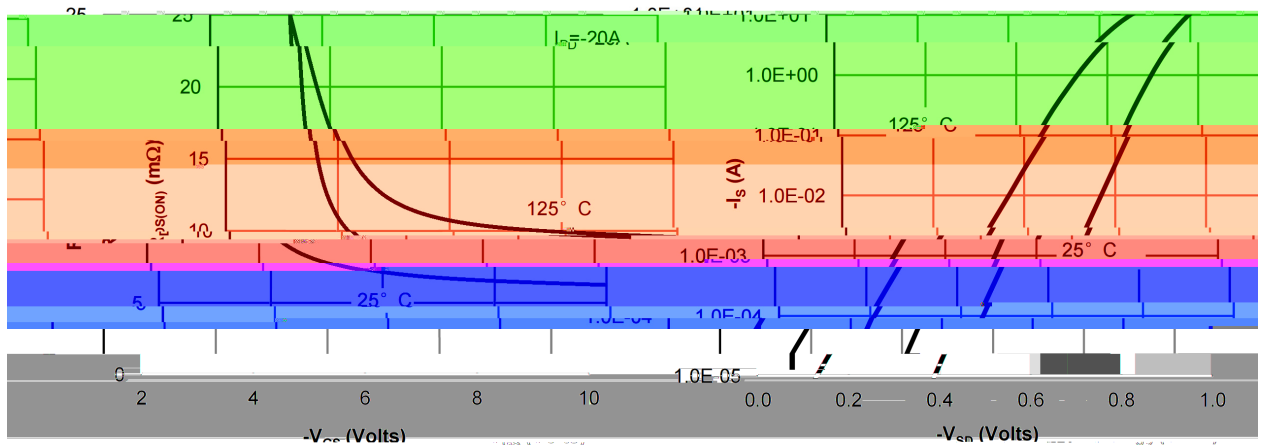

eristics

Figure 5: On-Resistance vs. Gate-Source Voltage

Figure 6: Body-Diode Character

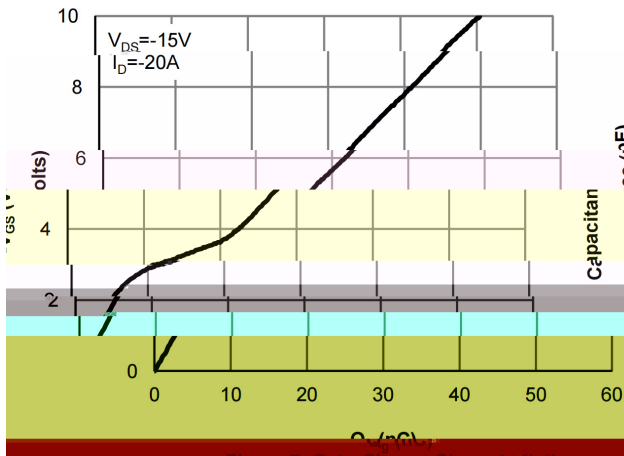


Figure 7: Gate-Charge Characteristics




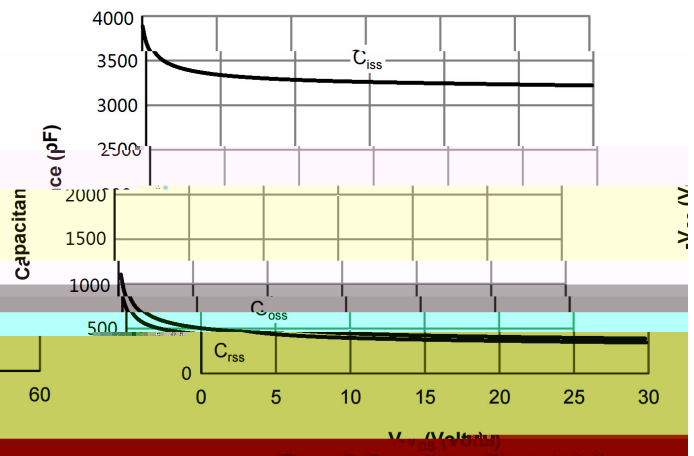


Figure 8: Capacitance Characteristics

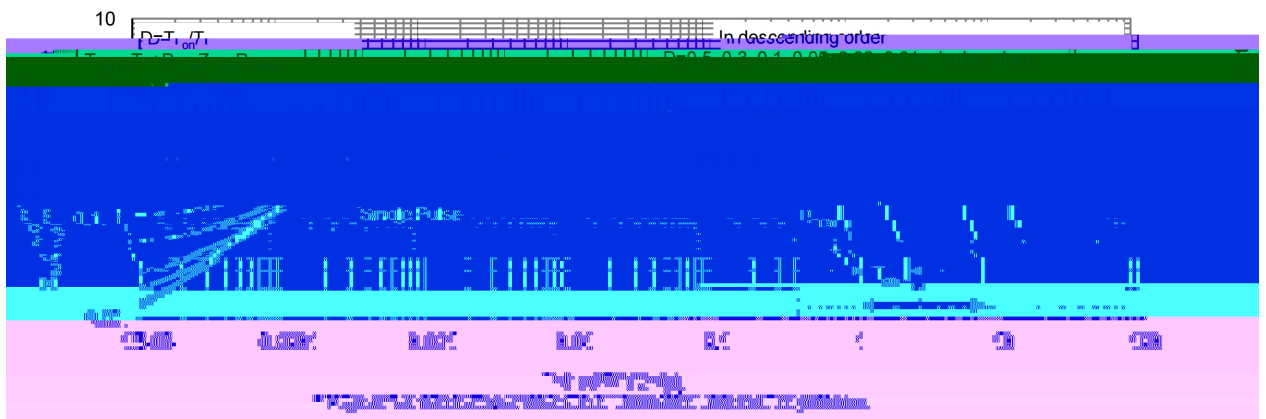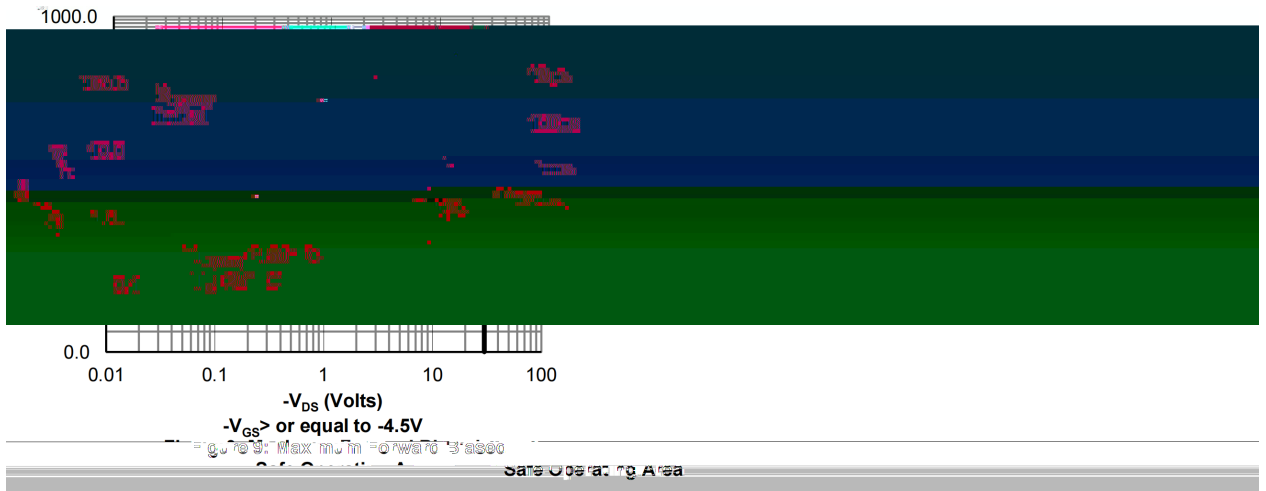

T0-252

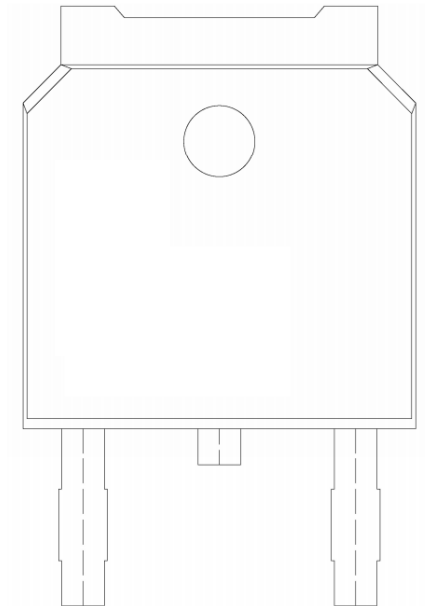

Temperature Profile for IR Reflow Soldering(Pb-Free)

3

