

/ Descriptions

VRS0; Q PRV
Grxe0h Q0FKDQQH0 P RVIHW lq d VRS0; S0dvwlf Sdfndjhl


/ Features

Ω Ω
Ω Ω
DHF0T434

/ Applications

PE2QE2X P SF2YJD / GF0GF /
Klj k luhtxhqf| SrlqwOri00rdg V|qfkurqrxv Exfn Frqyhuwhu iru PE2QE2X P SF2YJD/
Qhwz runlqj GF0GF Sr zhu V|vwhp/0rdg Vzlwfk

/ Equivalent Circuit

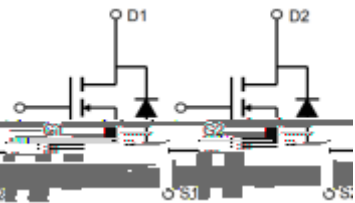

/ Pinning



/ Marking

/ Absolute Maximum Ratings(Ta=25)




/ Electrical Characteristics(Ta=25)

		μ				
						μ
					±	
		μ				
						Ω
						Ω
						″




/ Electrical Characteristics(Ta=25)

		Ω Ω				


Electrical Characteristic Curve

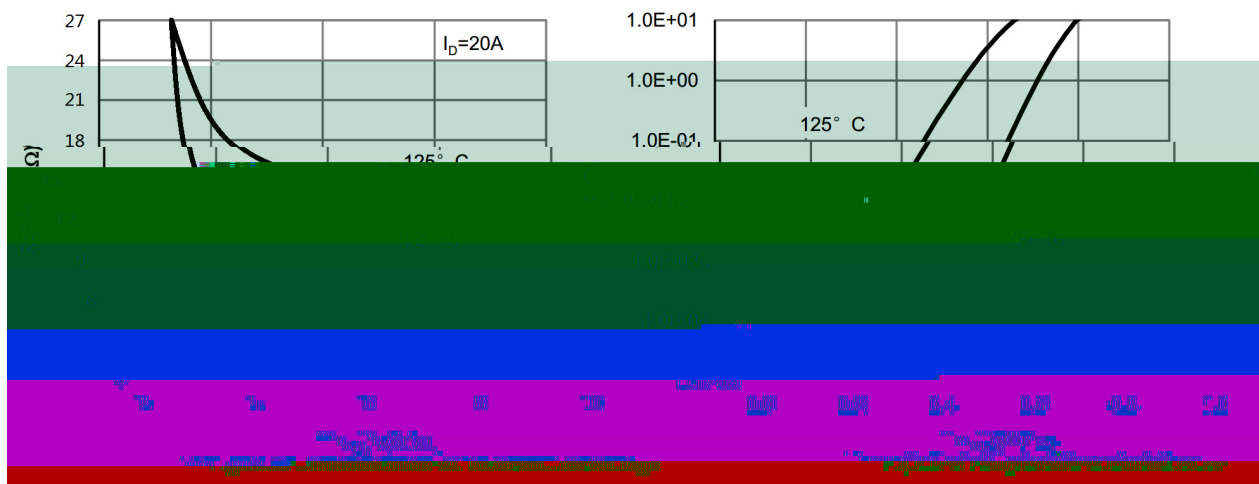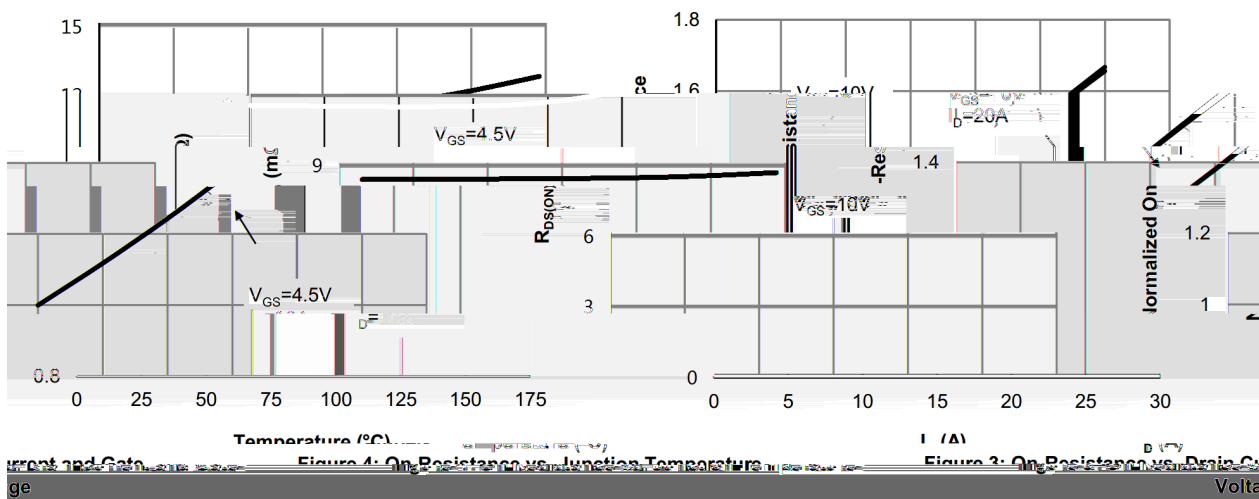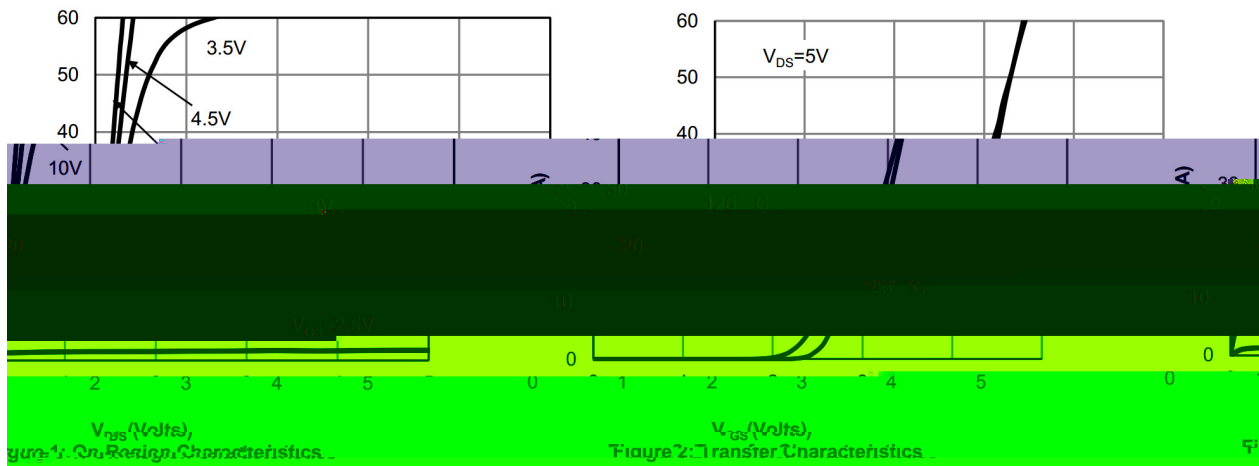


/ Electrical Characteristic Curve

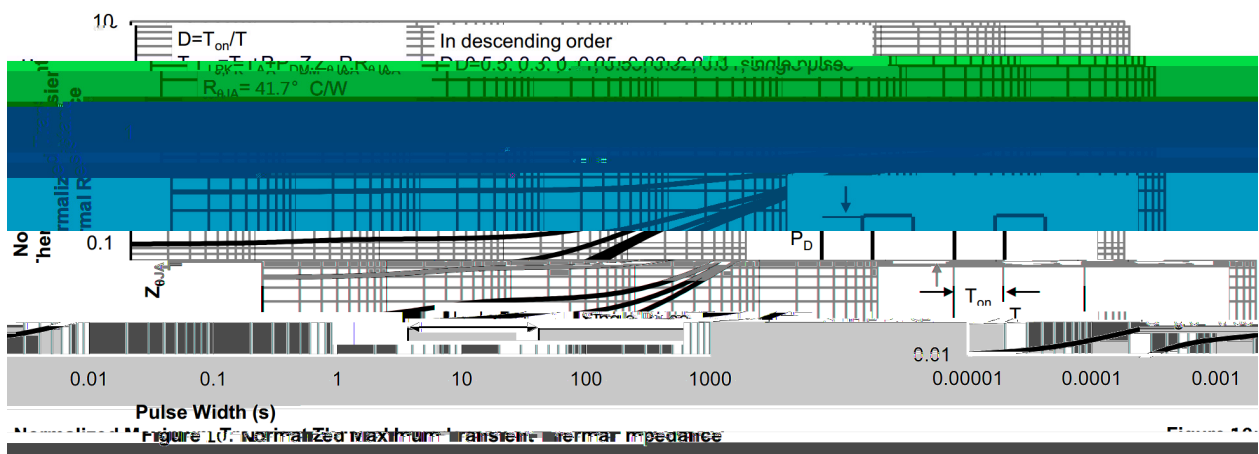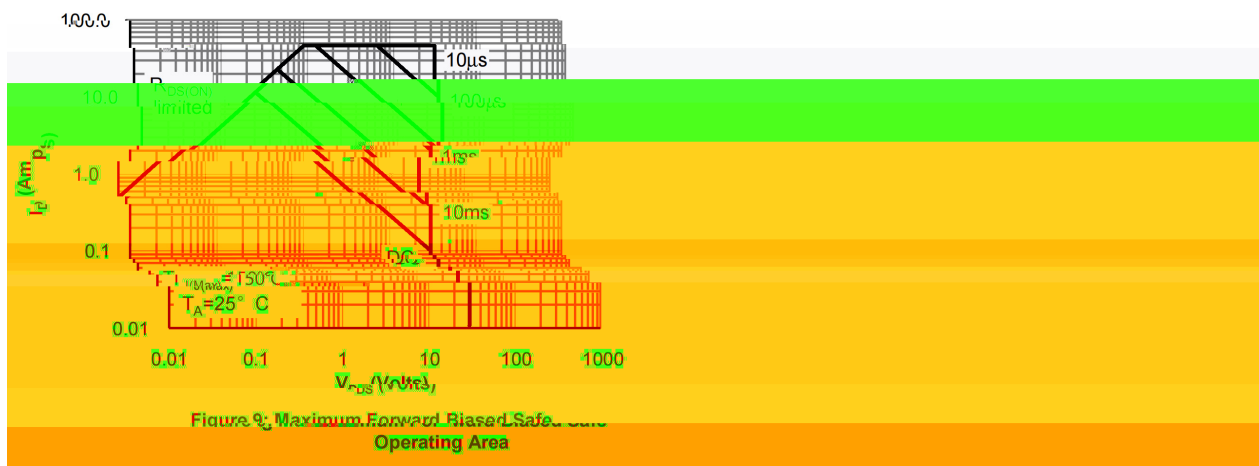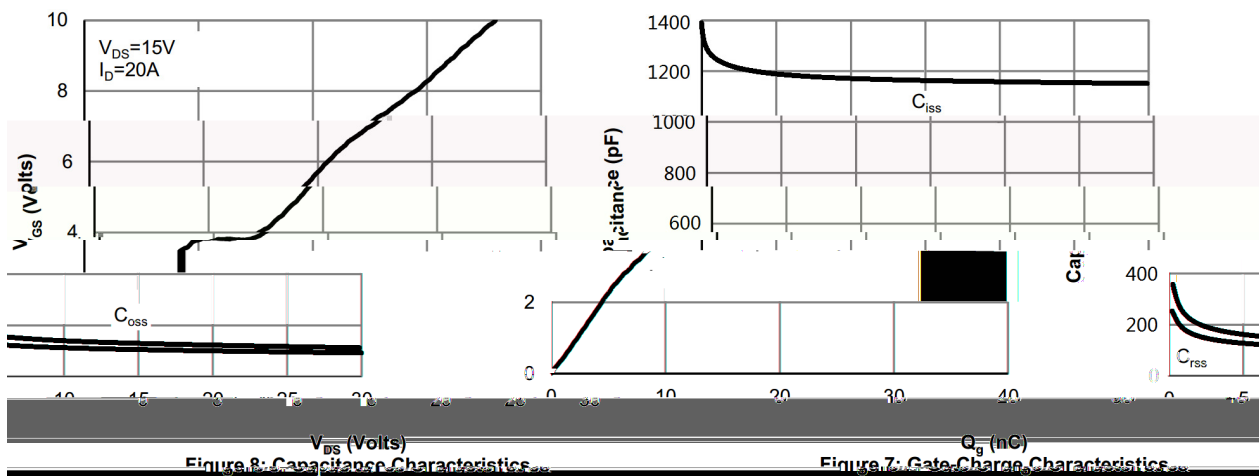


Package Dimensions

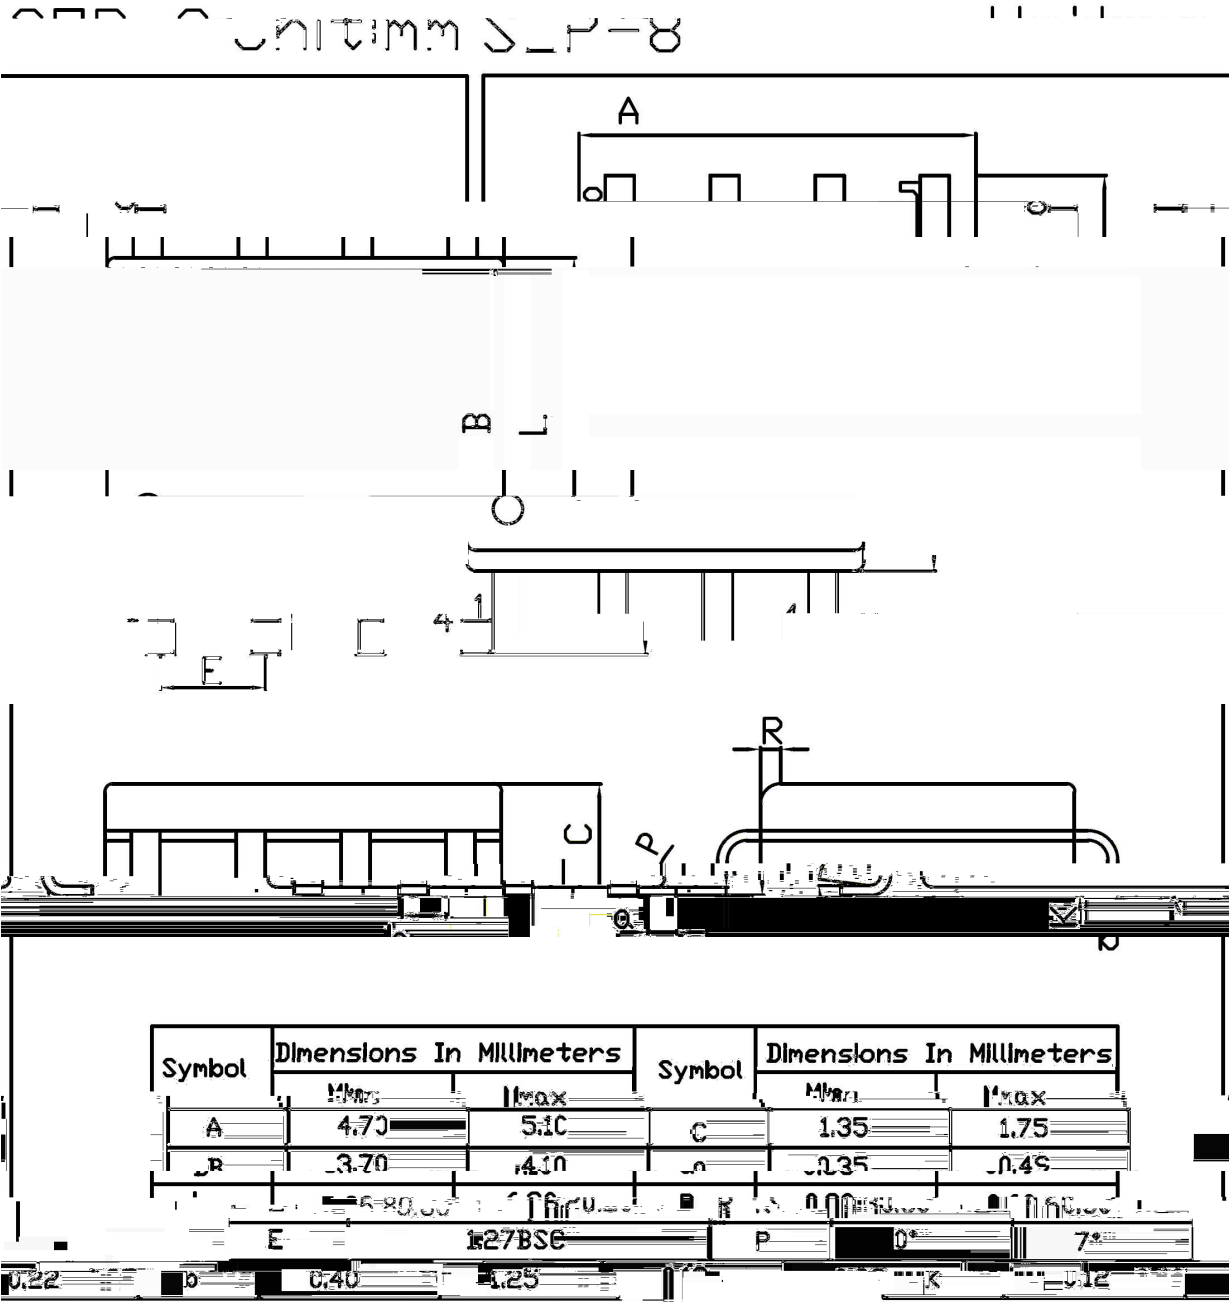

/ Marking Instructions

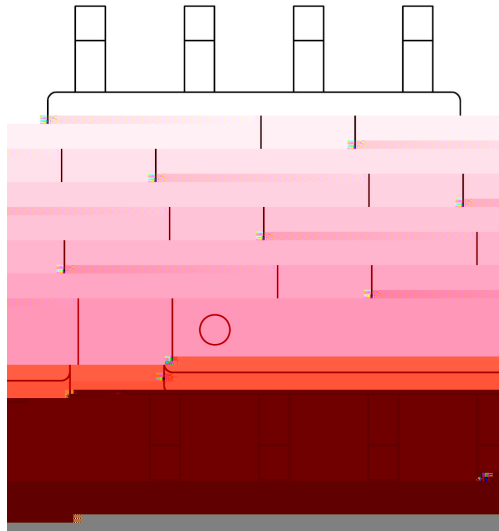

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

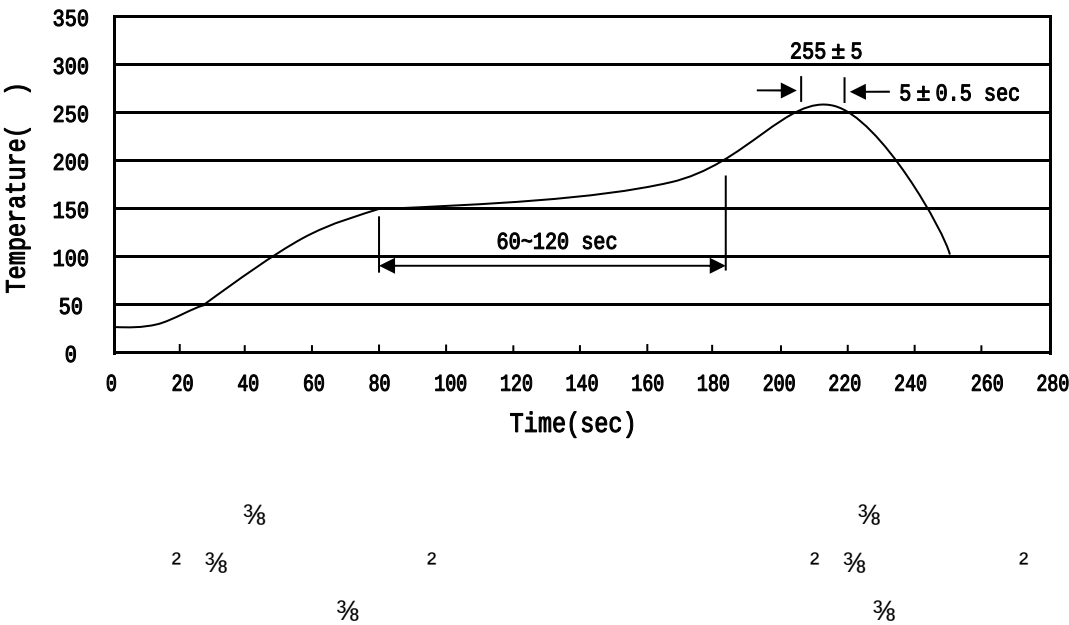

/ Resistance to Soldering Heat Test Conditions

2 3/8 2

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box

/ Notices