

5 é / Descriptions

9 5: .> // x 4 ?æ 3 3 5 9 « | o
N- CHANNEL MOSFET in a SOT-23 Plastic Package.


α a / Features

/ Ì J Ýä% /R — k 8 * 9 5 4 - * 4 k 9 5: / x k ‘ ’ +) 7 öÖäU . ¯
} L k) í D } o
Super high dense cell design for low R_{DS(ON)},SOT-23 package, Qualified to AEC-Q101 Standards for High Reliability, HF Product.


Đ ÷ / Applications

P òk ä, ... k z ä *) *) ôE k Æ V æ } Lo
Battery management,High speed switch,low power DC to DC converter, Meet the stringent requirements of automotive applications.

Ã w] Ô . / Equivalent Circuit



• Û - æ / Pinning

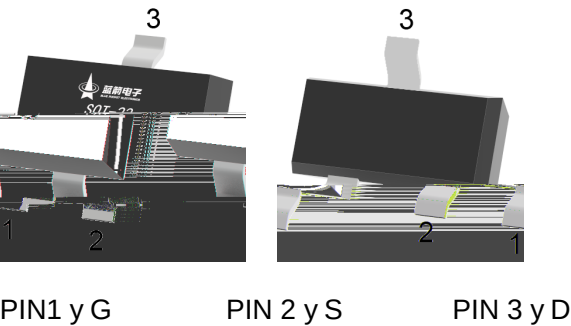

, M V / Marking

Marking	C2Q
---------	-----

④ Absolute Maximum Ratings(Ta=25 ;)

@ Parameter		Z Symbol	Rating	% y Unit
Drain-Source Voltage		V _{DSS}	20	V
Gate-Source Voltage		V _{GSS}	±12	V
Drain Current – Continuous		I _D	6.5	A
Pulsed Drain Current		I _{DM}	38	A
Power Dissipation		P _D	1.3	W
Storage Temperature Range		T _{stg}	-55 150	
Maximum Junction-to-Ambient	t 10s	R _{JA}	90	/W
Maximum Junction-to-Ambient	Steady-State		125	
Maximum Junction-to-Lead	Steady-State	R _{JL}	80	




④ Electrical Characteristics(Ta=25 ;)

@ Parameter	Z Symbol	y i Ū [^] Test Conditions	4 Min	” Typ	Ÿ Max	% y Unit
Gate Threshold Voltage	V _{GS(th)}	V _{DS} =V _{GS} I _D =250 A	0.5	0.9	1.2	V
Drain–Source Breakdown Voltage	V _{(BR)DSS}	V _{GS} =0 I _D =250 A	20	21		V
Zero Gate Voltage Drain Current	I _{DSS}	V _{GS} =0 V _{DS} =20V			1.0	A
Gate–Body Leakage.	I _{GSS}	V _{GS} =±12V V _{DS} =0V			±100	nA
Static Drain–Source On–Resistance	R _{DS(on)1}	V _{GS} =4.5V I _D =5.0A		16.5	33	m
	R _{DS(on)2}	V _{GS} =2.5V I _D =4.5A		23.5	40	m
	R _{DS(on)3}	V _{GS} =1.8V I _D =4.0A			51	m
Drain–Source Diode Forward Voltage	V _{SD}	V _{GS} =0V I _D =1A		0.78	1.2	V




Electrical Characteristics(Ta=25 ;)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Input Capacitance	Ciss	V _{GS} =0V, V _{DS} =10V f=1MHz		860		pF
Output Capacitance	Coss			800		
Reverse Transfer Capacitance	Crss			495		
Gate resistance	Rg	V _{GS} =0V, V _{DS} =0V f=1MHz		4.9		Ω
Total Gate Charge	Qg(4.5V)	V _{GS} =4.5V, V _{DS} =10V I _D =6.5A		7		nC
Gate Source Charge	Qgs			1		
Gate Drain Charge	Qgd			2		
Turn-On Delay Time	t _{d(on)}	V _{GS} =4.5V, V _{DS} =10V R _L =1.54 Ω, R _{GEN} =3 Ω		7		ns
Turn-On Rise Time	t _r			10		
Turn-Off Delay Time	t _{d(off)}			32		
Turn-Off Fall Time	t _f			11		

Electrical Characteristic Curve

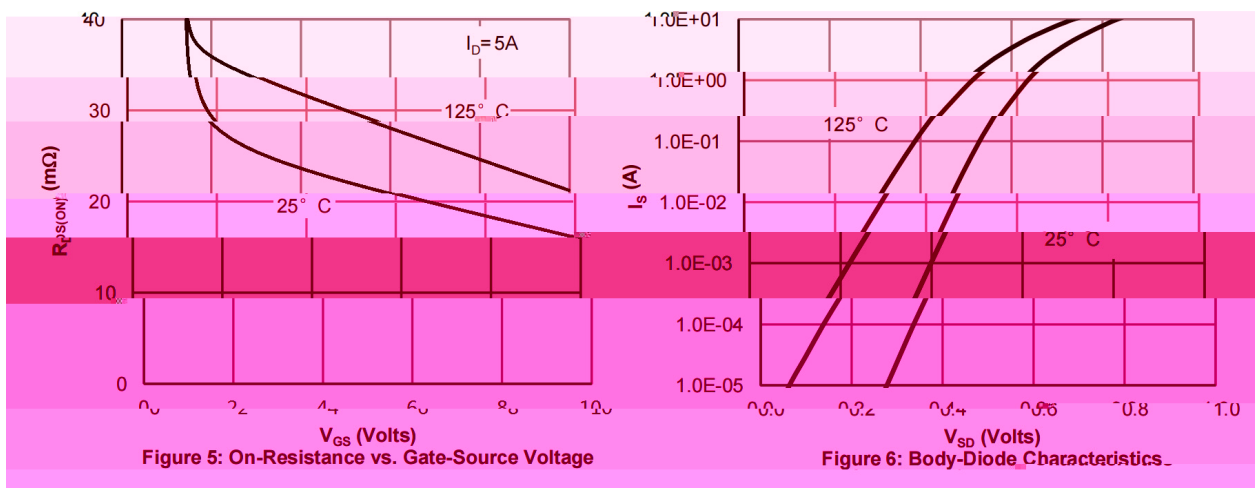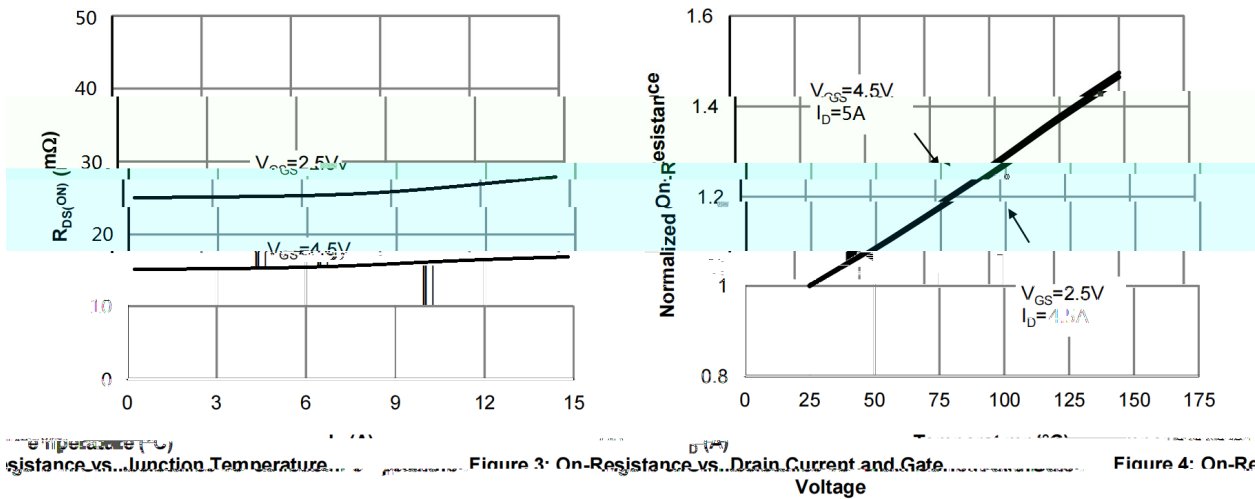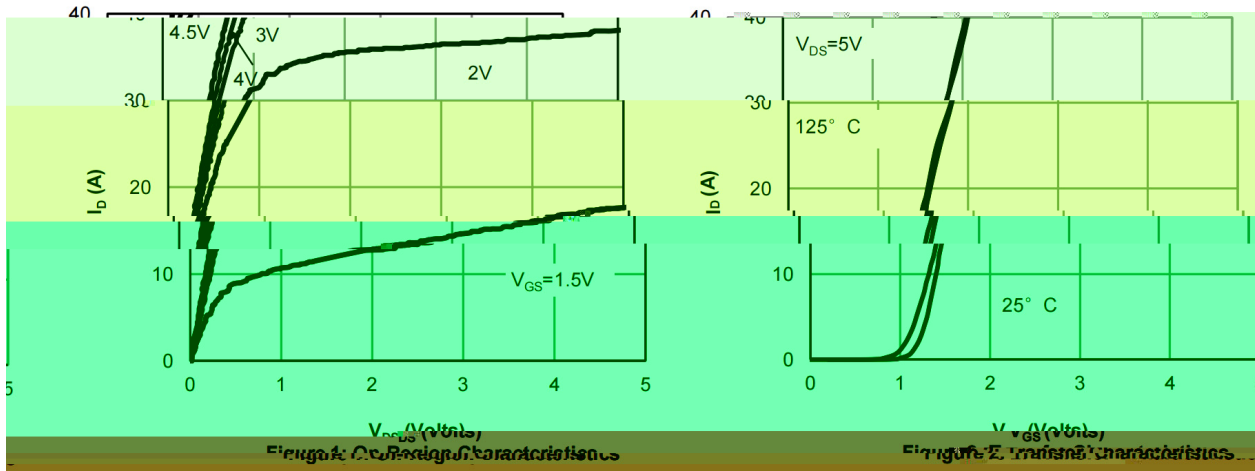


Electrical Characteristic Curve

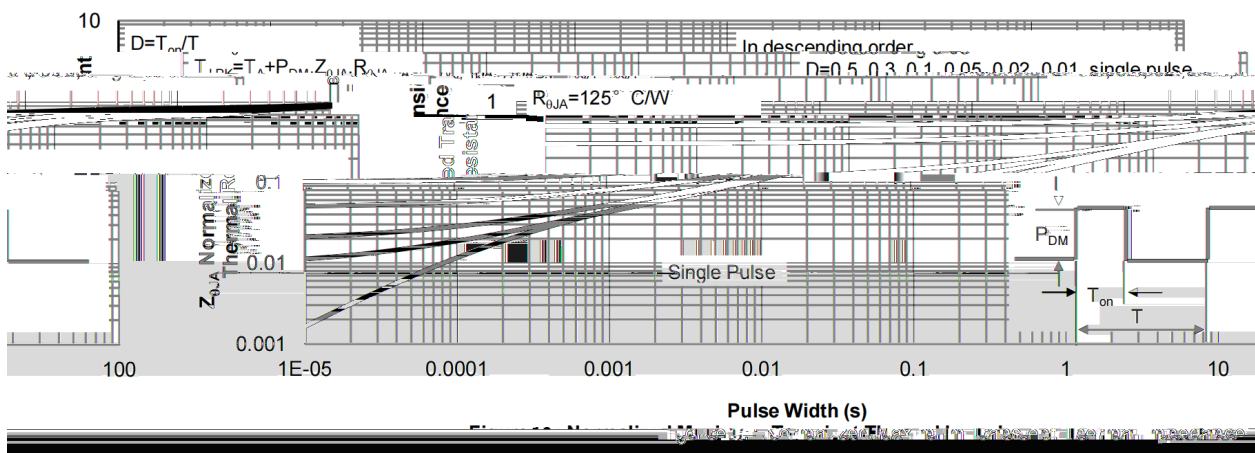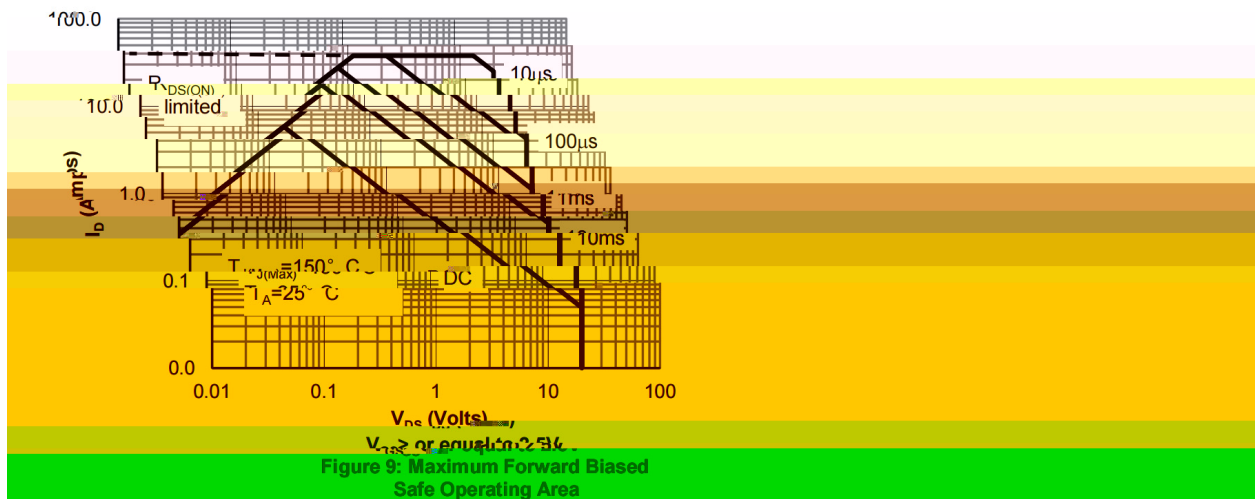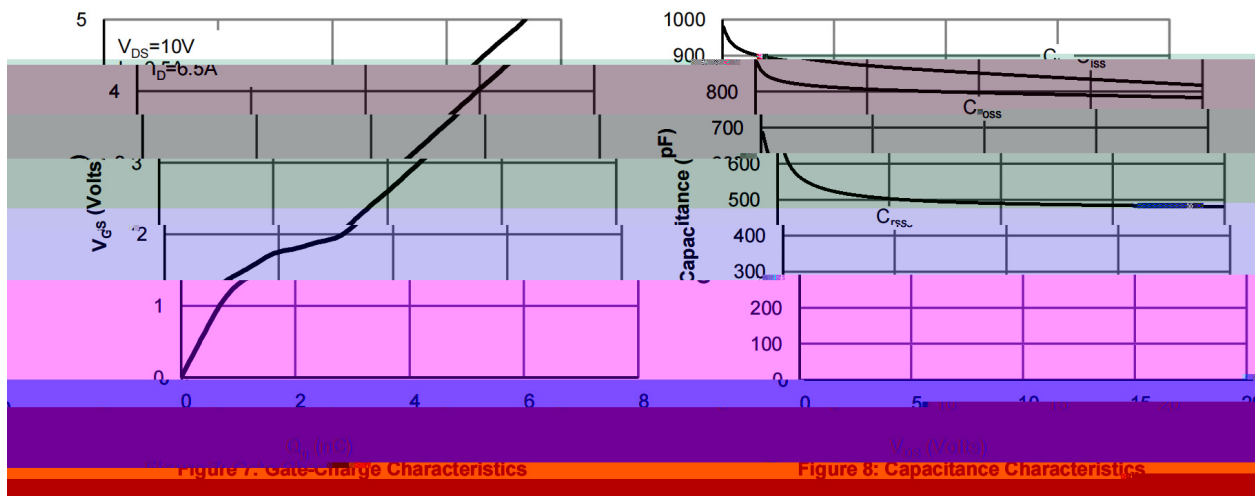


Ø □ =) ⌀ / Package Dimensions

SOT-23

单位: mm

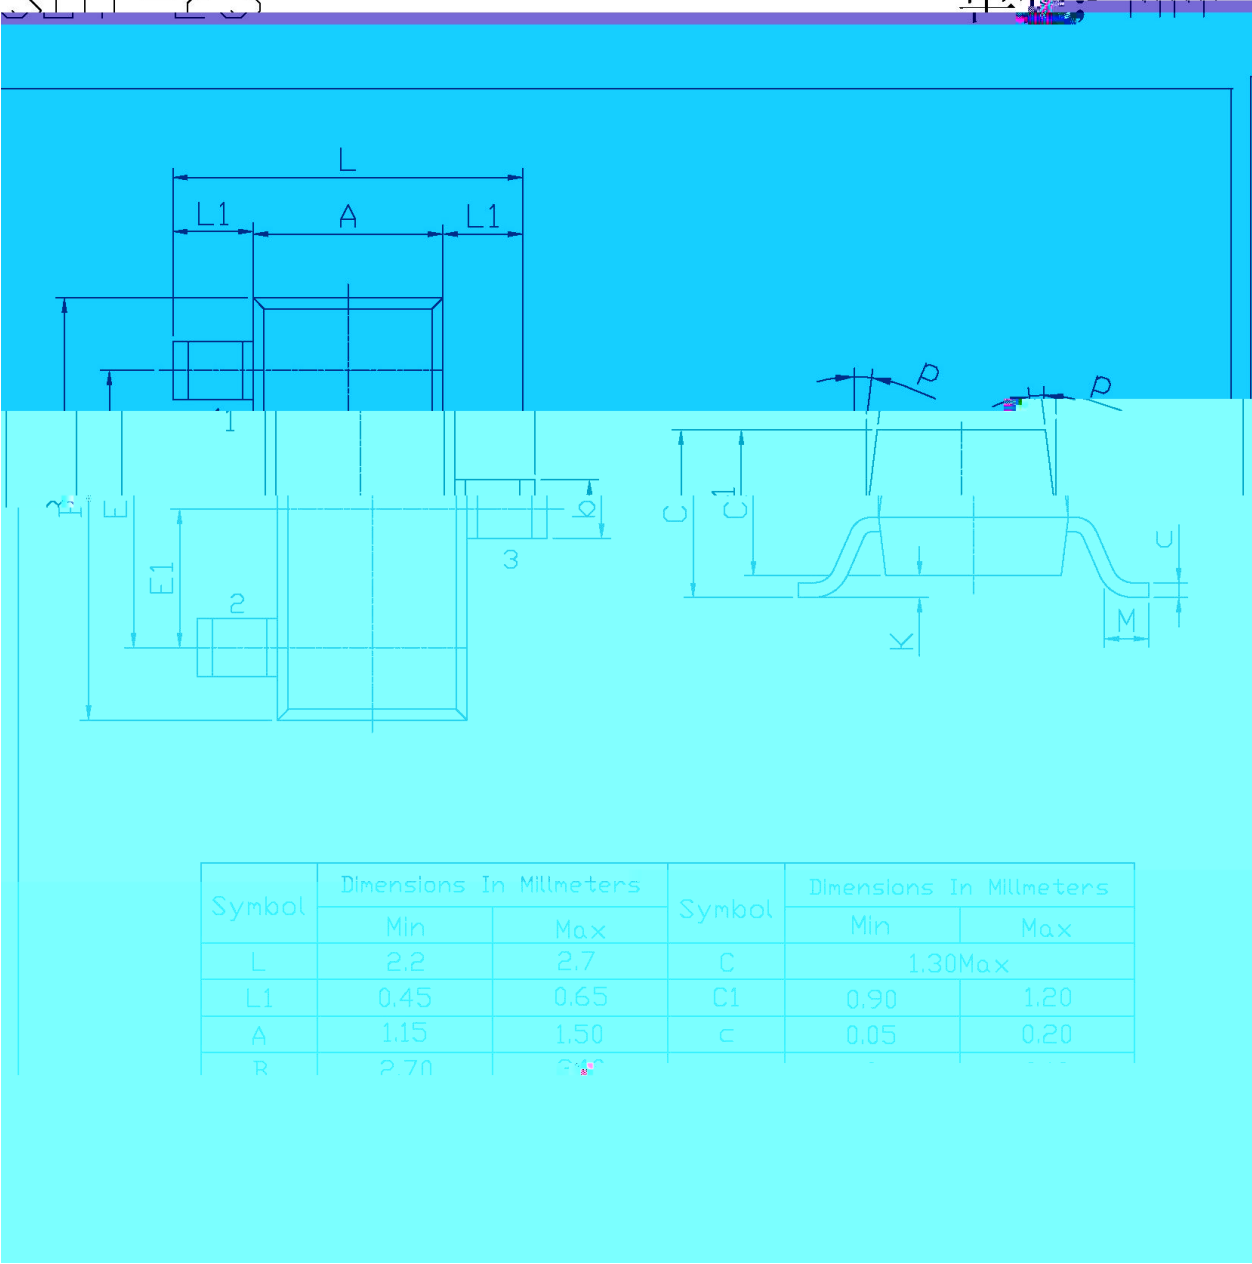

, M y f / Marking Instructions

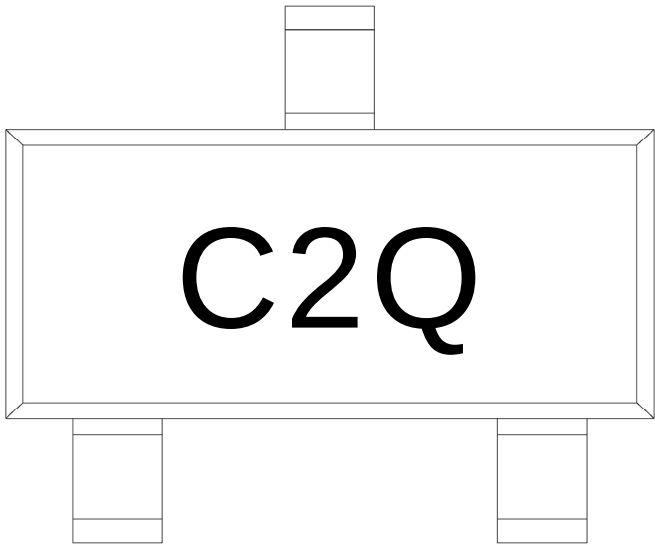


“ ¢ y
C2: ” Z W A
Q y V æ) í D } ö

Note:
C2 y Product Type Code
7 '[ZUSUHORK NGRUMKT LXKK VXUJ[IZ)UJK

šWD t...•Žč (x/) / :KSVKXGZ[XK 6XULORK LUX /8 8KLRU] 9URJKXOTM 6

7HP SHU DWXUH

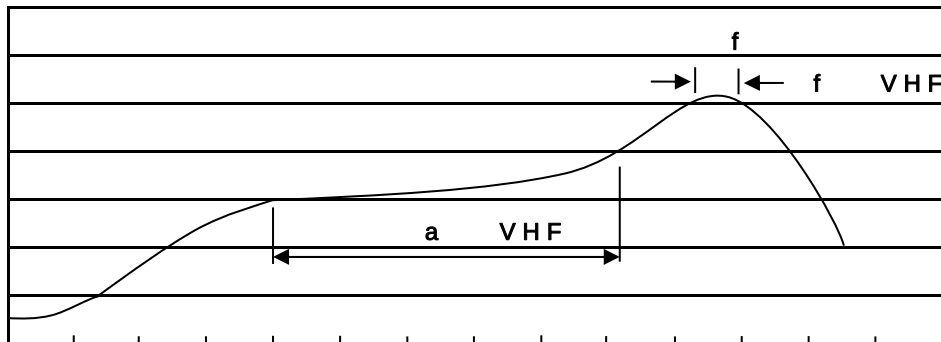

7LPH VHF

“ç y

Note:

- 1o ~ % 150 %200 - k 60 %120sec; 1.Preheating:150~200 - , Time:60~120sec.
2o Q 255 r5 - k 4 Ò 5 r0.5sec; 2.Peak Temp.:255 r5 - , Duration:5 r0.5sec.
3o D N òi Ò , 2 %10 - /sec. 3. Cooling Speed: 2~10 - /sec.

ÂD /Cã p⁻ »] / Resistance to Soldering Heat Test Conditions

y 260 r5 - y 10 r1 sec. Temp.:260 r5 - Time:10 r1 sec

G P á / Packaging SPEC.

2 & x / REEL

Package Type 7>û ~ E	Units ;>û !H					Dimension ;>û p . (unit /mm ³)		
	Units/Reel /-	Reels/Inner Box -- /-	Units/Inner Box /-	Inner Boxes/Outer Box - /1ç	Units/Outer Box /1ç	Reel	Inner Box	Outer Box
SOT-23	3,000	10	30,000	6	180,000	s ×8	180×120×180	390×385×205

„Đ y f / Notices