
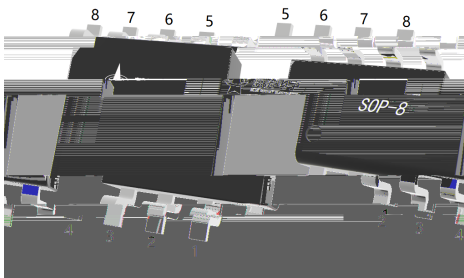


BRCS250N03DSC

Double N-CHANNEL MOSFET in a SOP-8 Plastic Package.

Ω
Ω

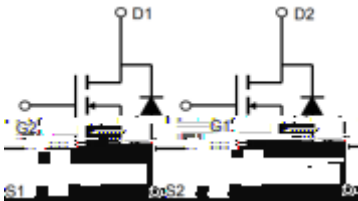

Ø6 ? %

/ Absolute Maximum Ratings(Ta=25)




/ Electrical Characteristics(Ta=25)

		μ				
						μ
		μ				
						Ω
						Ω
						Ω

/ Electrical Characteristics(Ta=25)

		Ω Ω				


/ Electrical Characteristic Curve

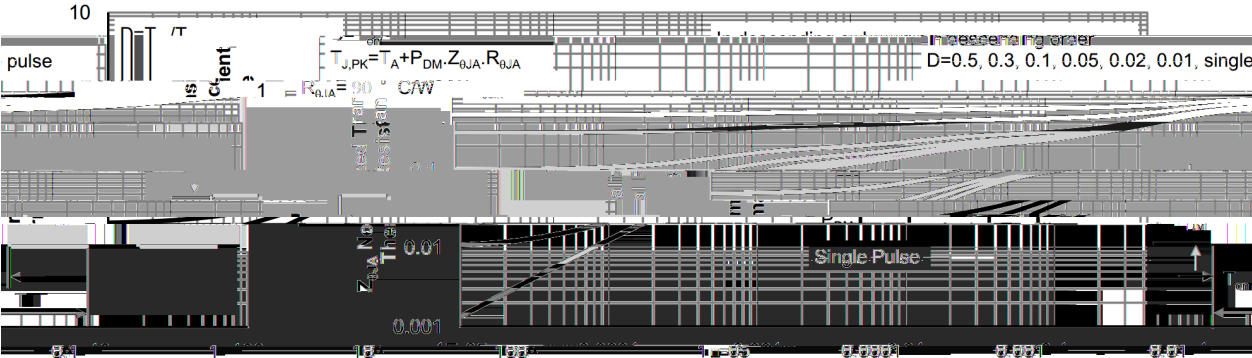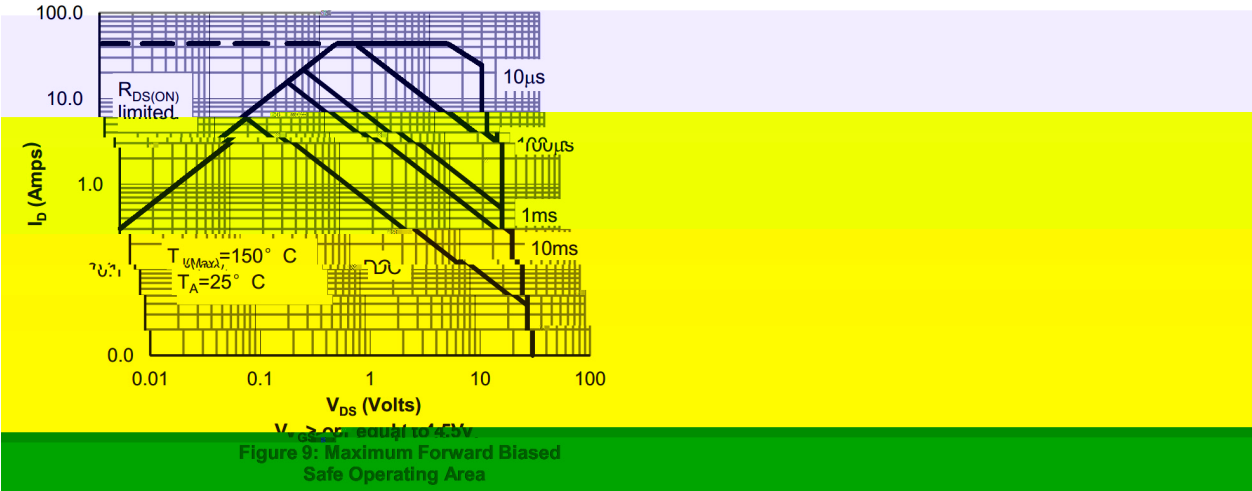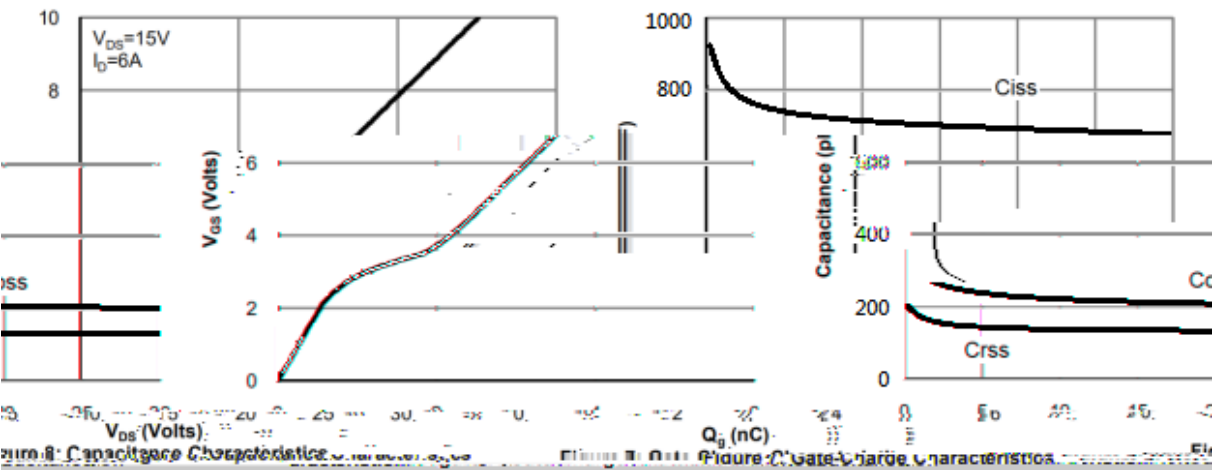

Width (s)
Transient Thermal Impedance

Pulse Width
Figure 10: Normalized Maximum Transient Thermal Impedance

/ Package Dimensions

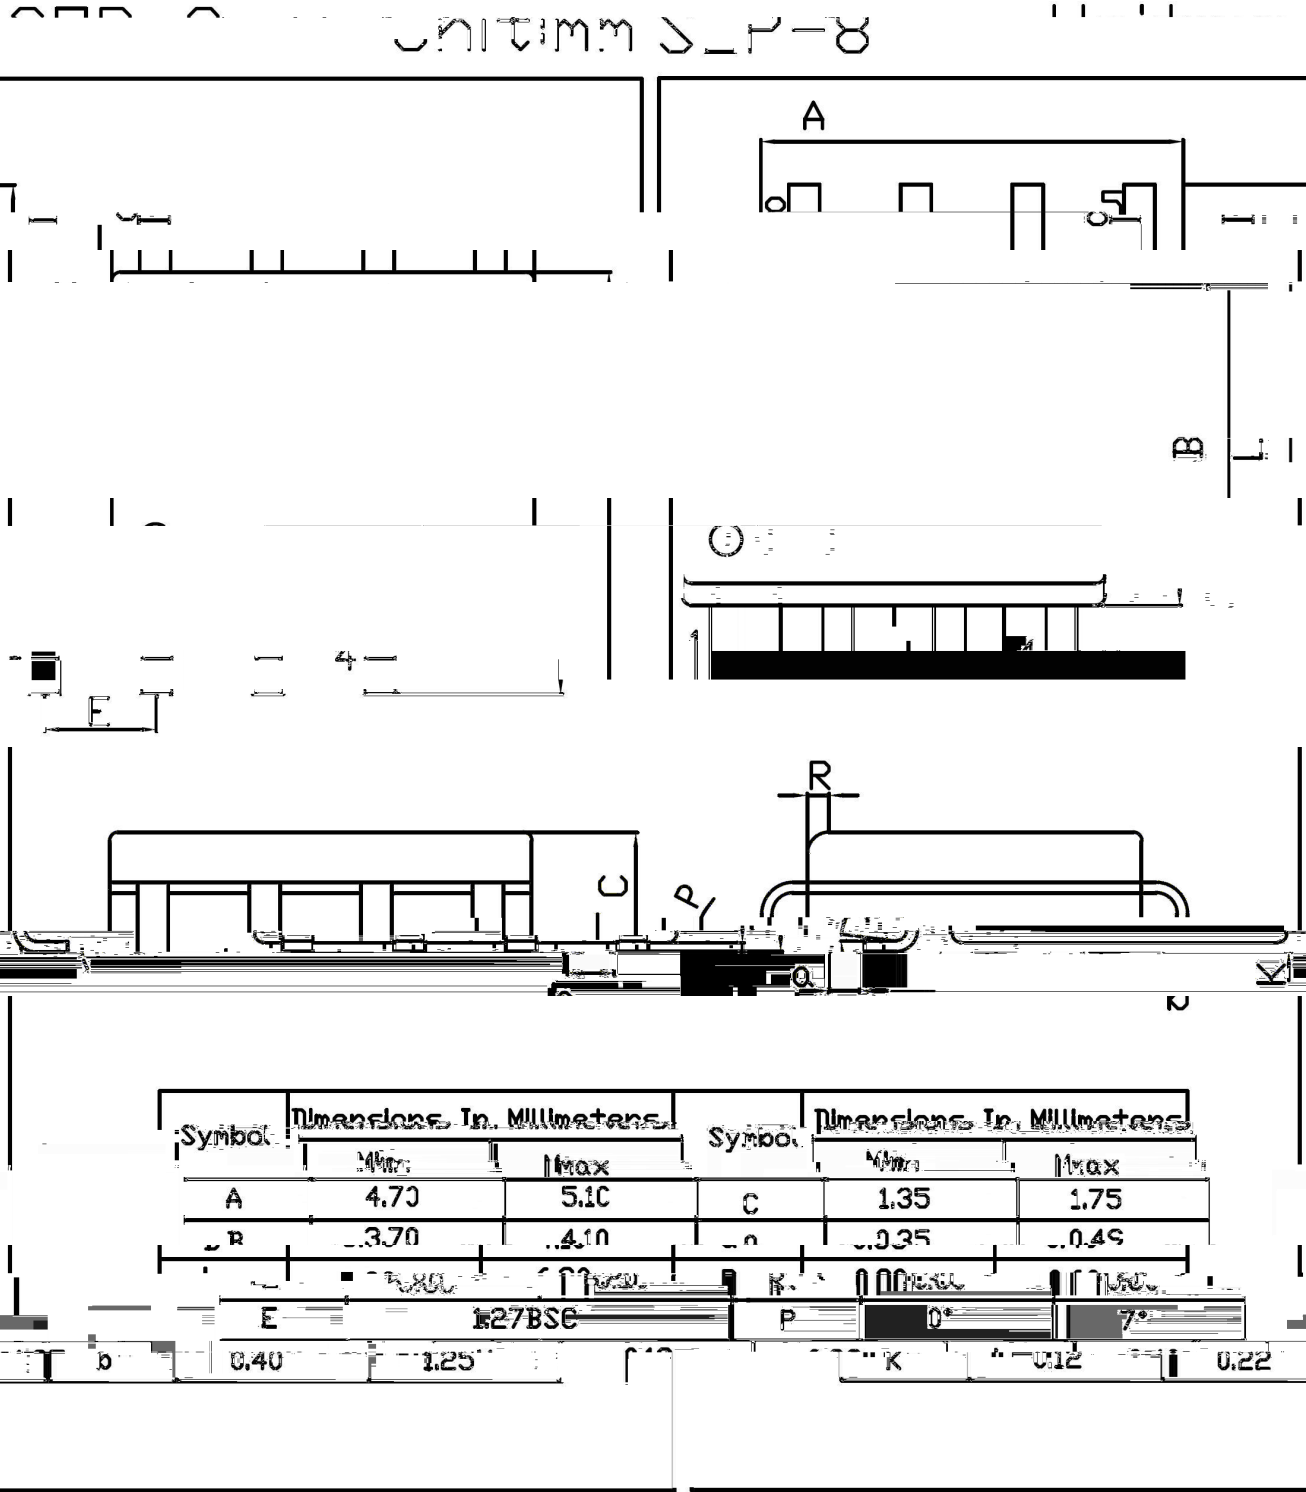

/ Marking Instructions

