

BRES24VM1U3XE



DATA SHEET

DFN2×2-3L TVS
DFN2×2-3L



/ Absolute Maximum Ratings(Ta=25)

μ			
μ			


/ Electrical Characteristics(Ta=25)

						μ
		μ				


/ Electrical Characteristic Curve

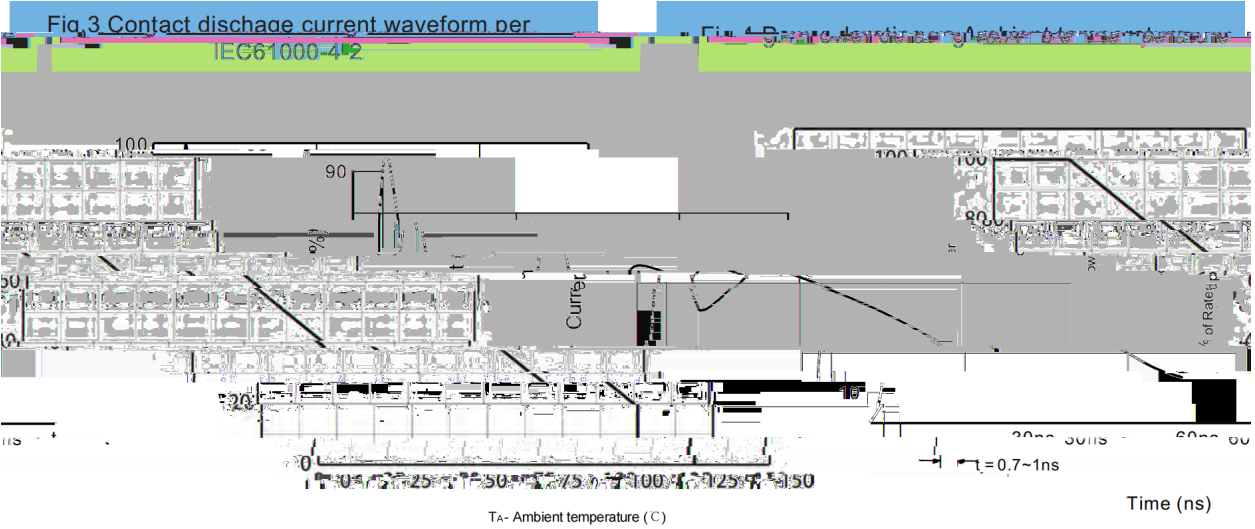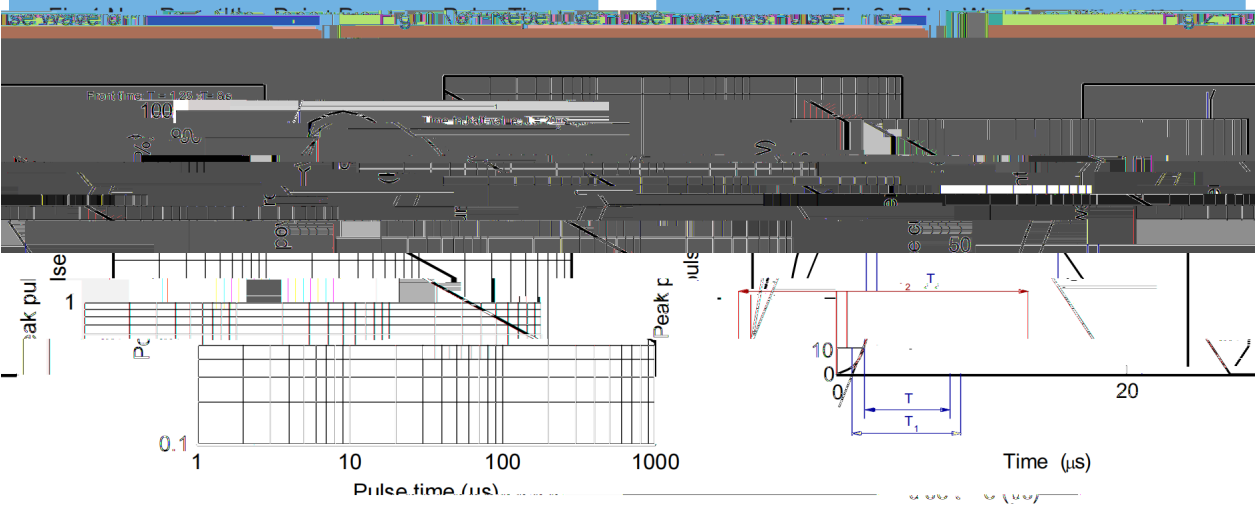

/ Package Dimensions

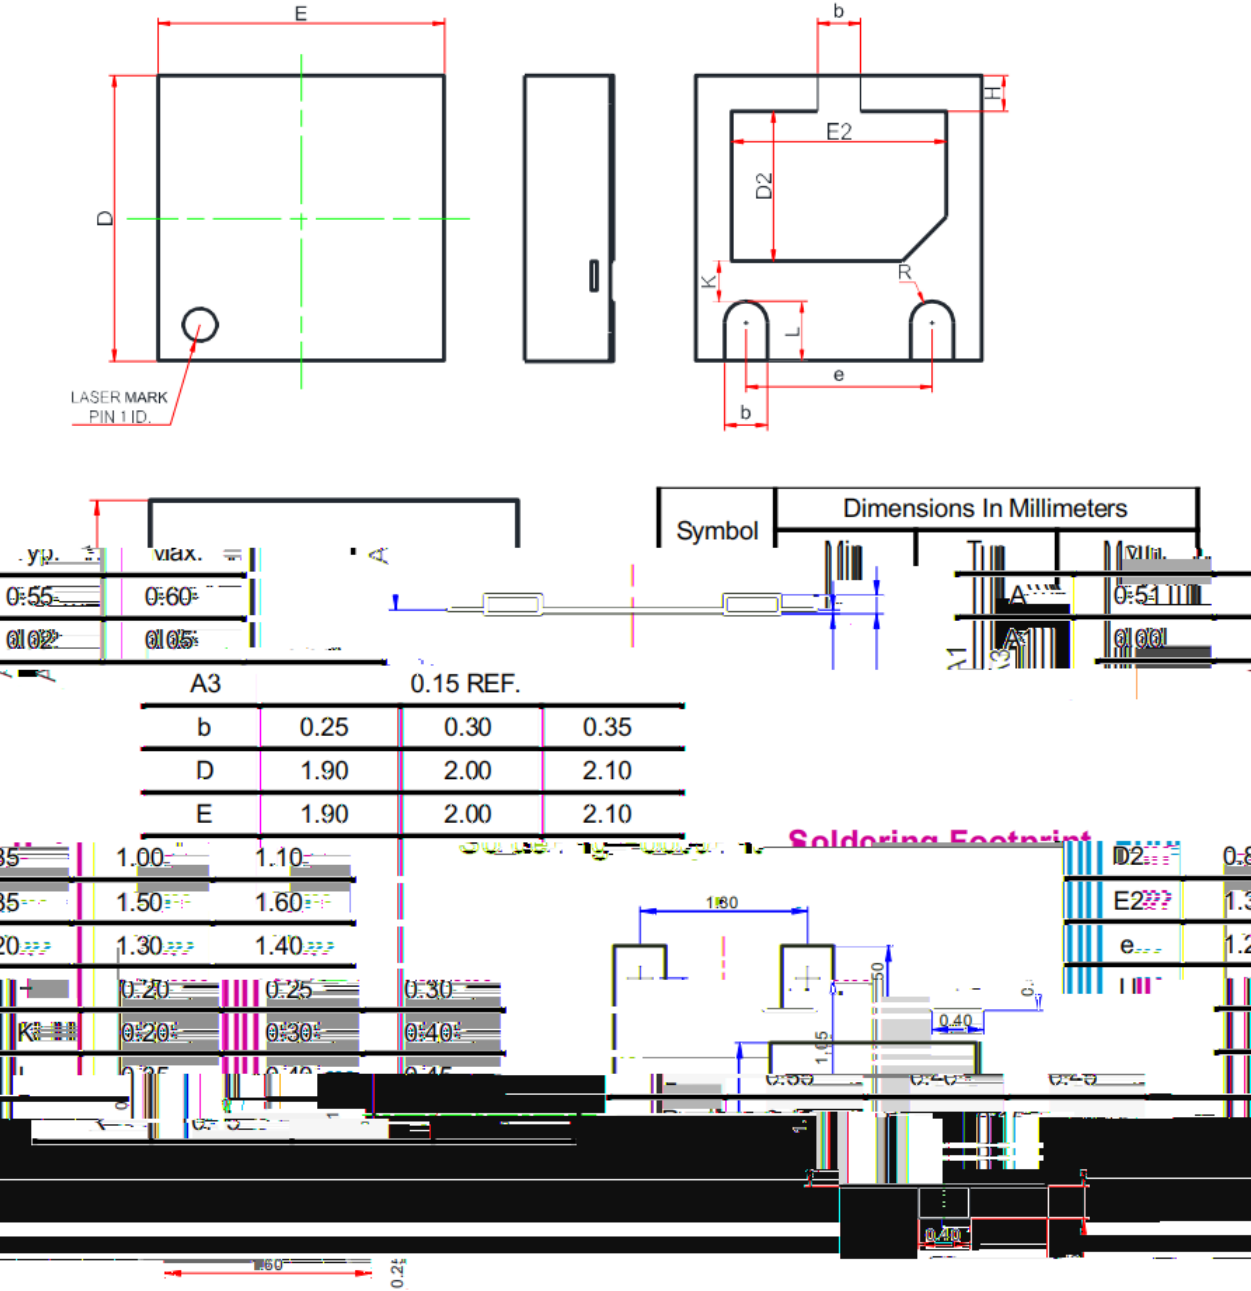


/ Marking Instructions

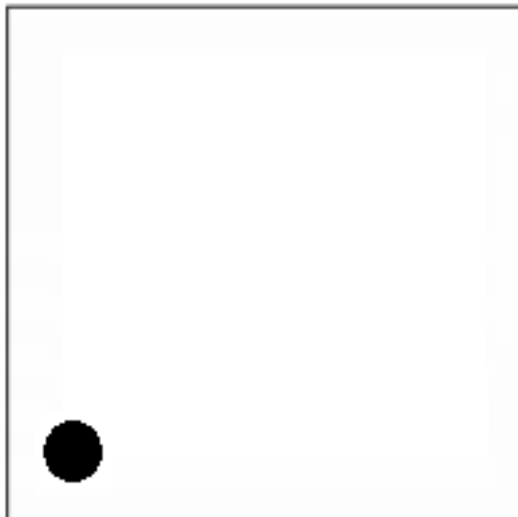

H24

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

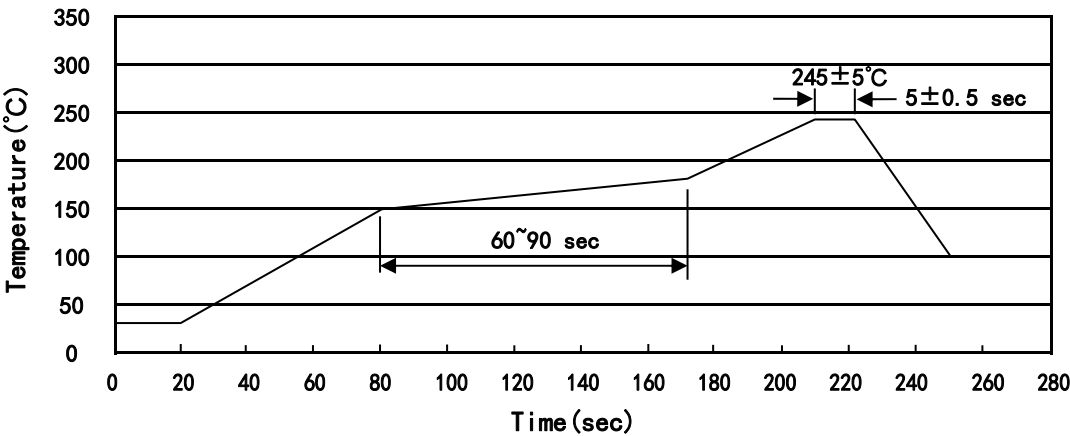

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

/ Notices