



ESD

/ Features

ESD

/ Applications

MP3

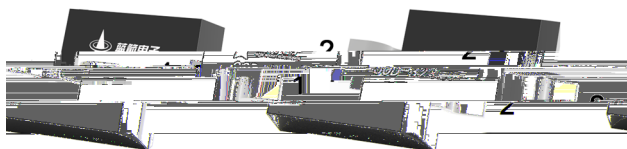

/ Marking

/ Absolute Maximum Ratings

μ			
μ			
		$\pm$	
		$\pm$	

/ Electrical Characteristics(Ta=25)

		μ				
		μ				

Notes:

- 1)
- 2) Non-repetitive current pulse, according to IEC61000-4-5.

/ Electrical Characteristic Curve($T_a=25^\circ\text{C}$)

Fig.1 ESD Clamping Voltage Screenshot
Positive 8 kV Contact perIEC61000-4-2



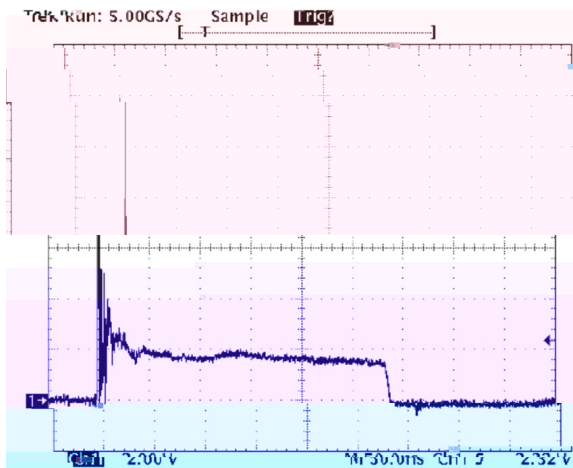


Fig.2 ESD Clamping Voltage Screenshot
Negative 8 kV Contact perIEC61000-4-2

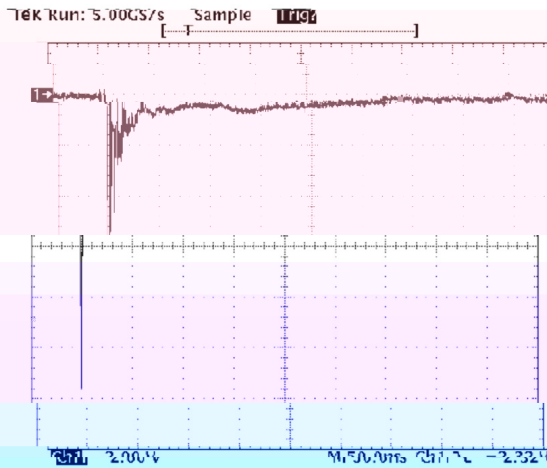


/ Package Dimensions

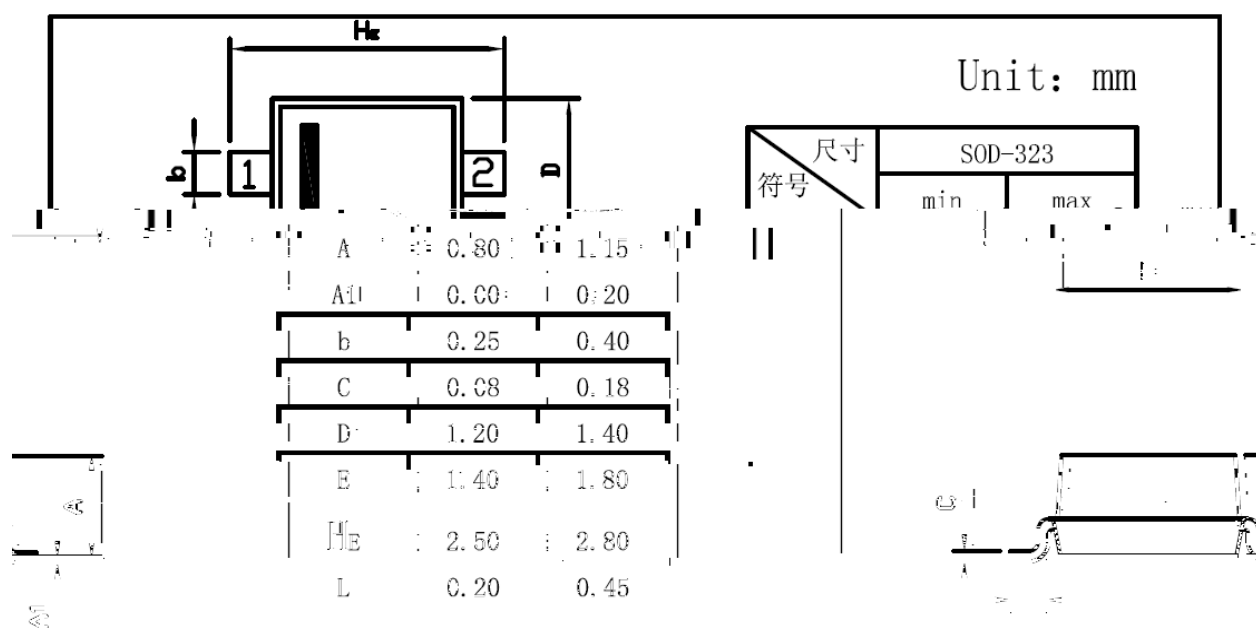

PAN JIANLI PANG CHANGHONG


/ Marking Instructions

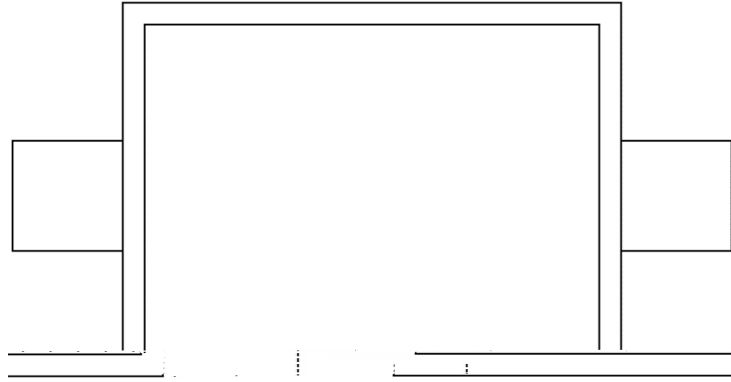

2N:

2N

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

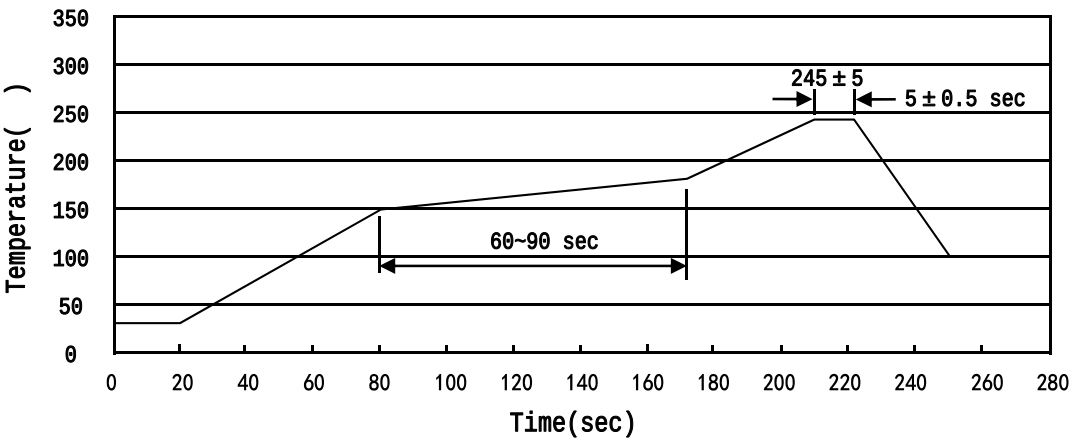

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box

/ Notices