



μ			
μ			
		$\pm$	
		$\pm$	
			$^{\circ}\text{C}$

					$\pm$	
		$\pm$				
		μ				
		μ				
						Ω

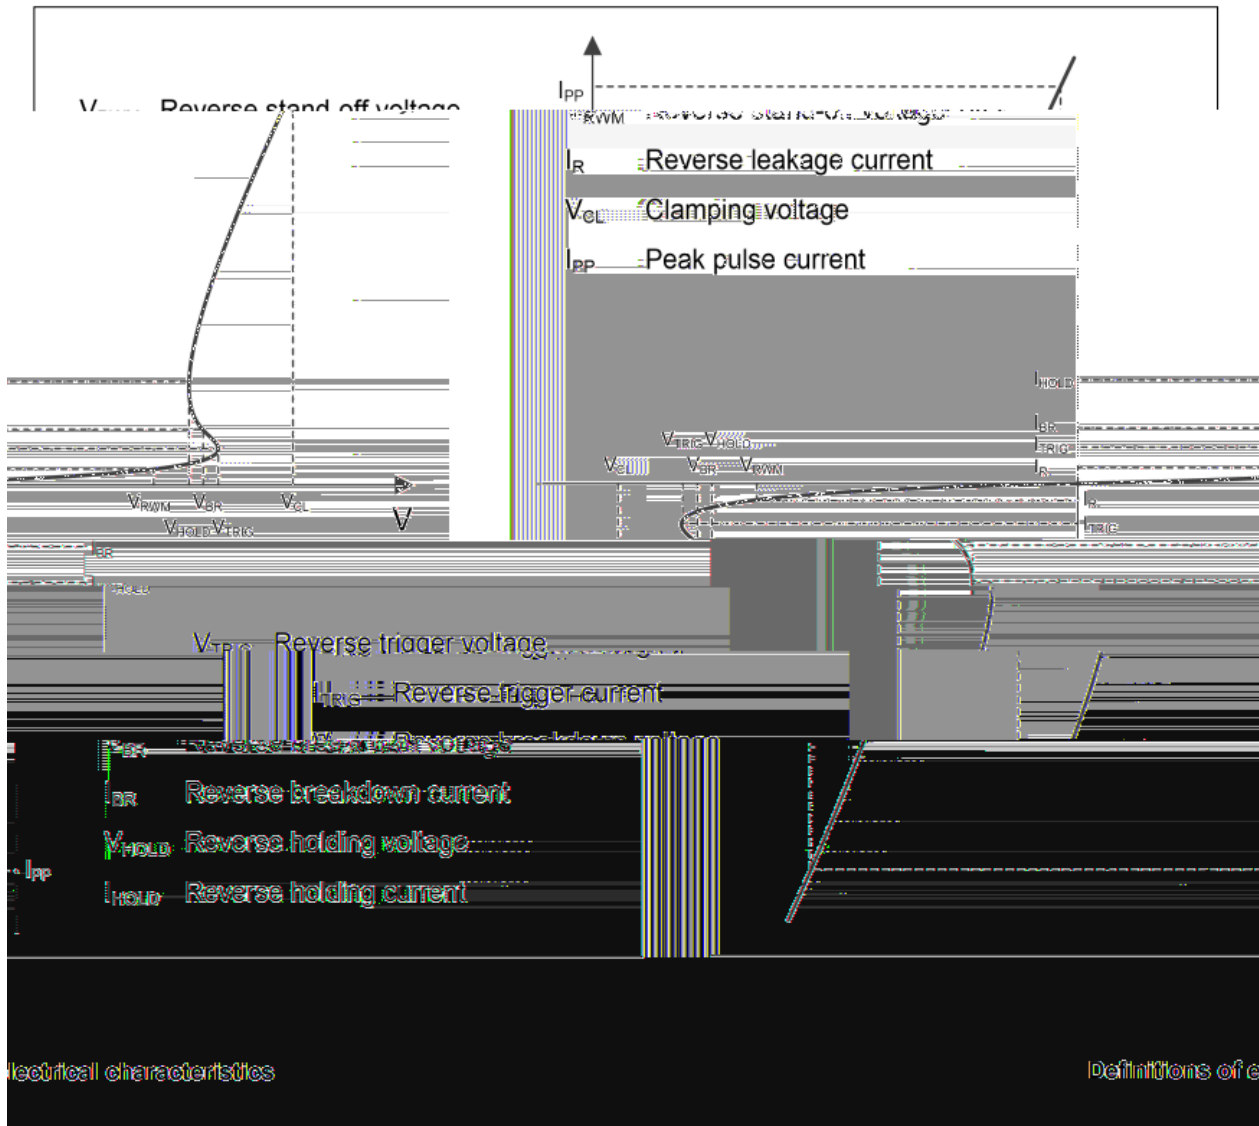


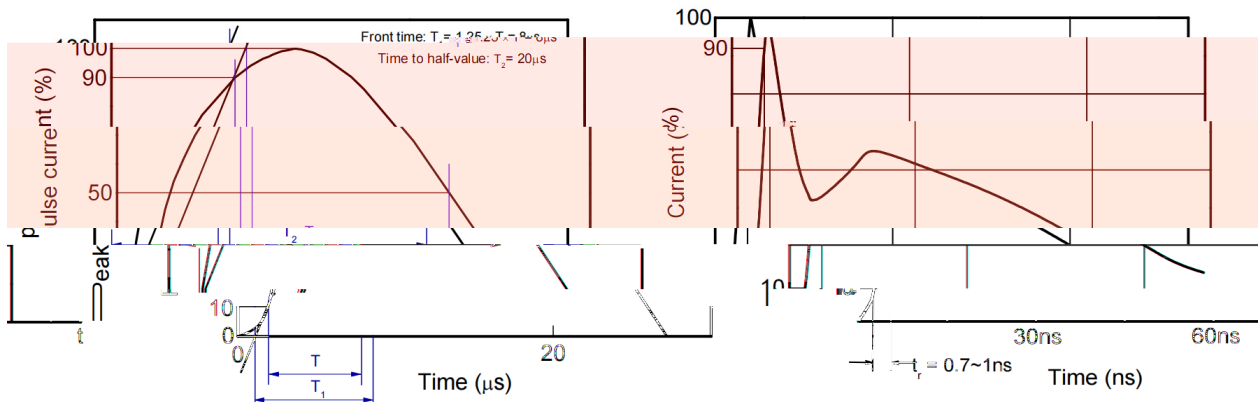

IEC61000-4-2

8/20μs waveform per IEC61000-4-5


Contact discharge current waveform per IEC61000-4-2

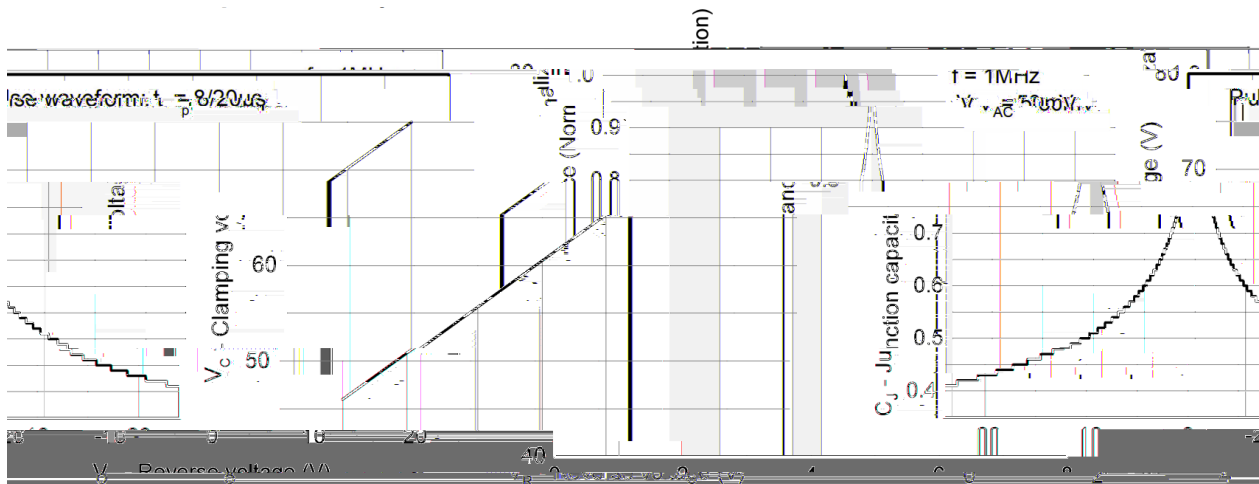

Peak pulse current



Capacitance vs. Reverse voltage

Clamping voltage vs. Reverse voltage

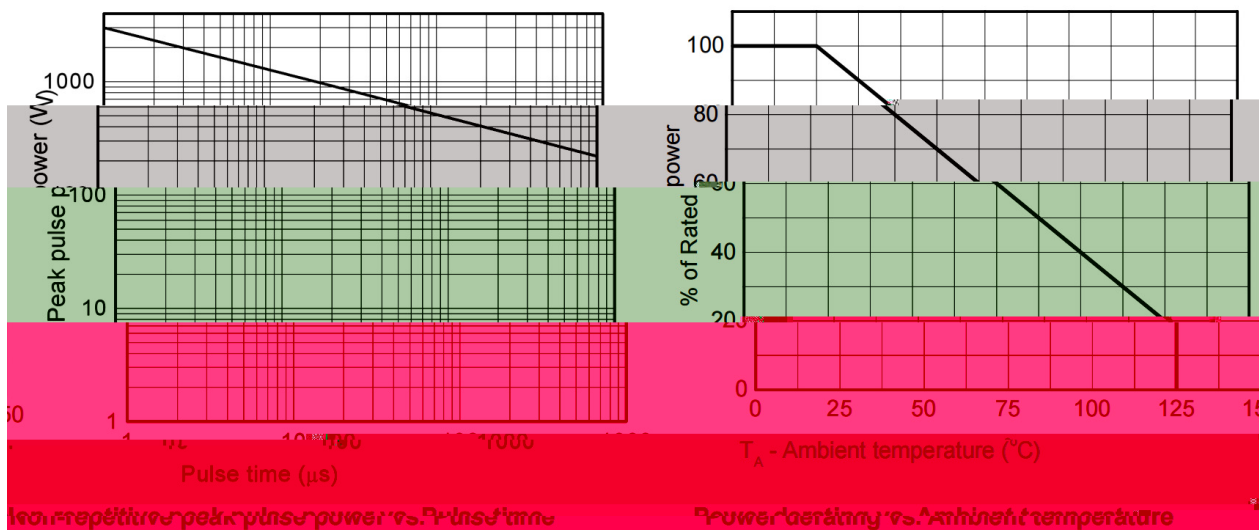


Peak pulse power vs. Pulse time

Power derating vs. Ambient temperature

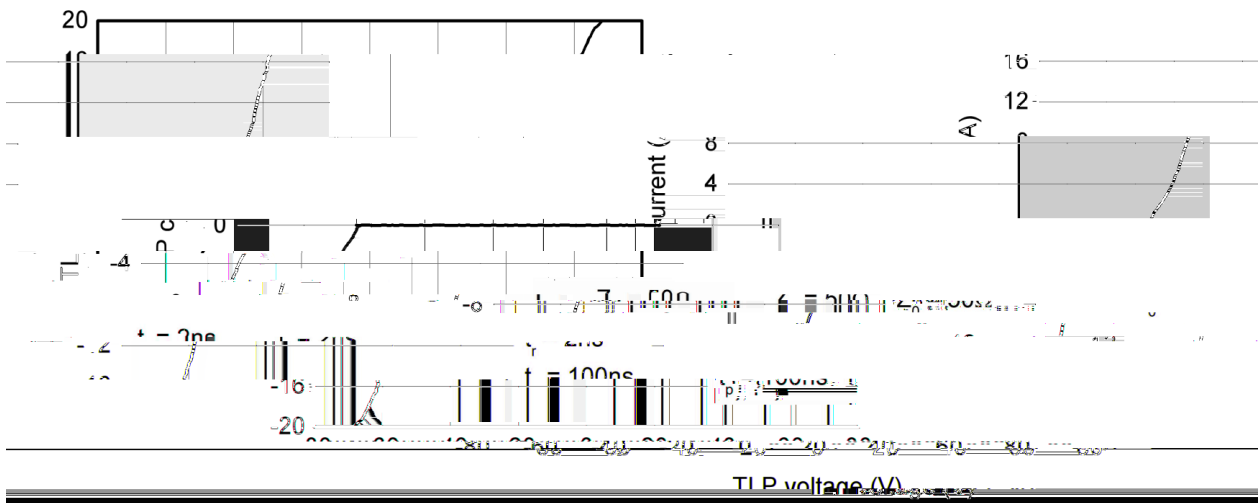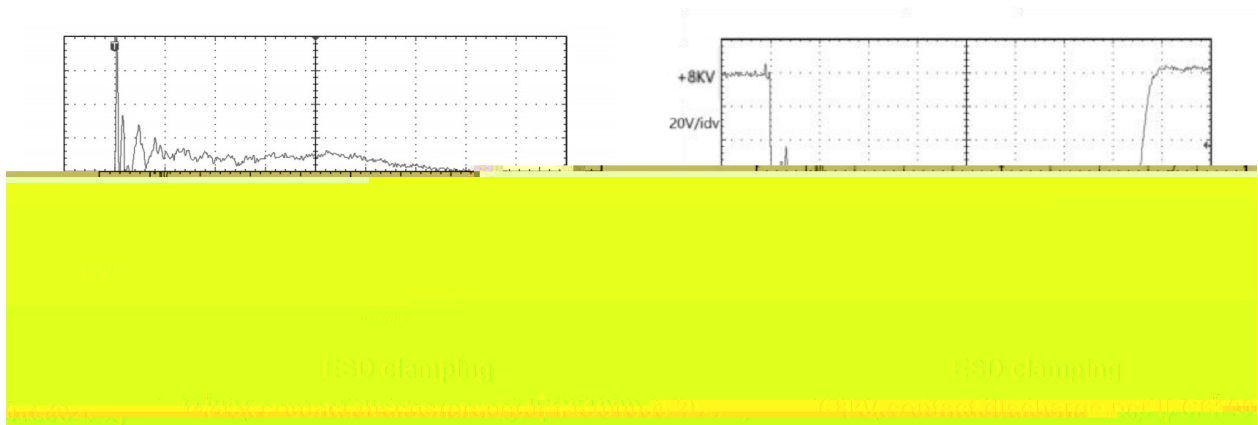


DFN1006-2L

Unit:mm

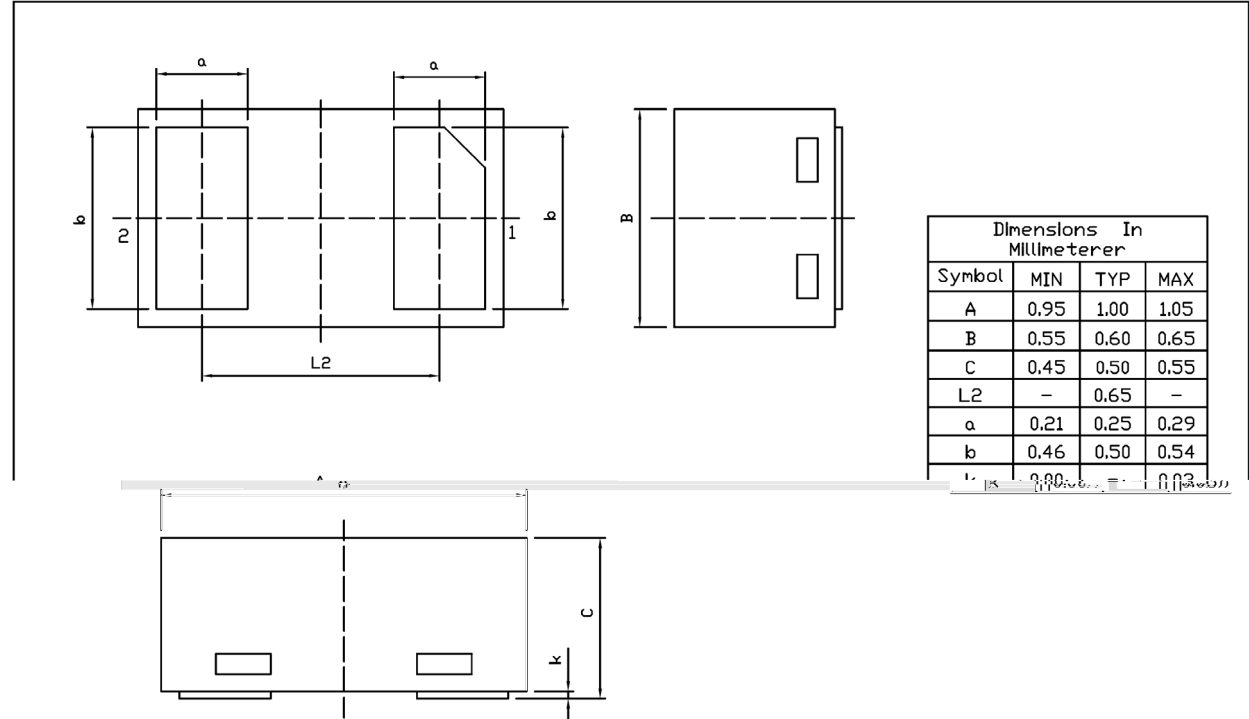



Temperature Profile for IR Reflow Soldering(Pb-Free)

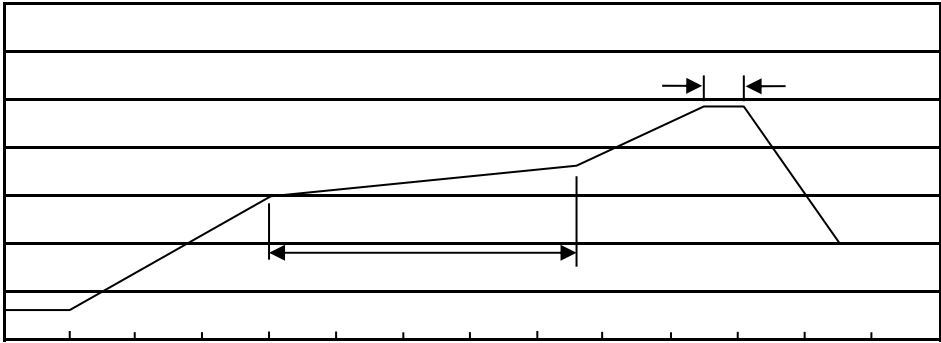

± ± ± ±

± ±

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box
						"		