

DFN1006-2L ESD

◆◆

 μ

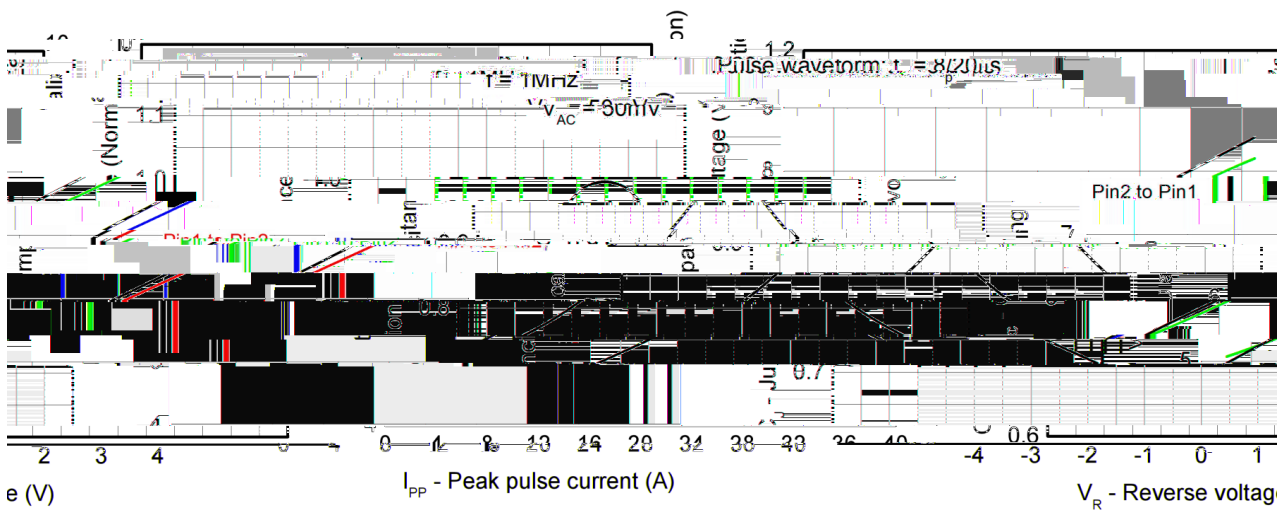
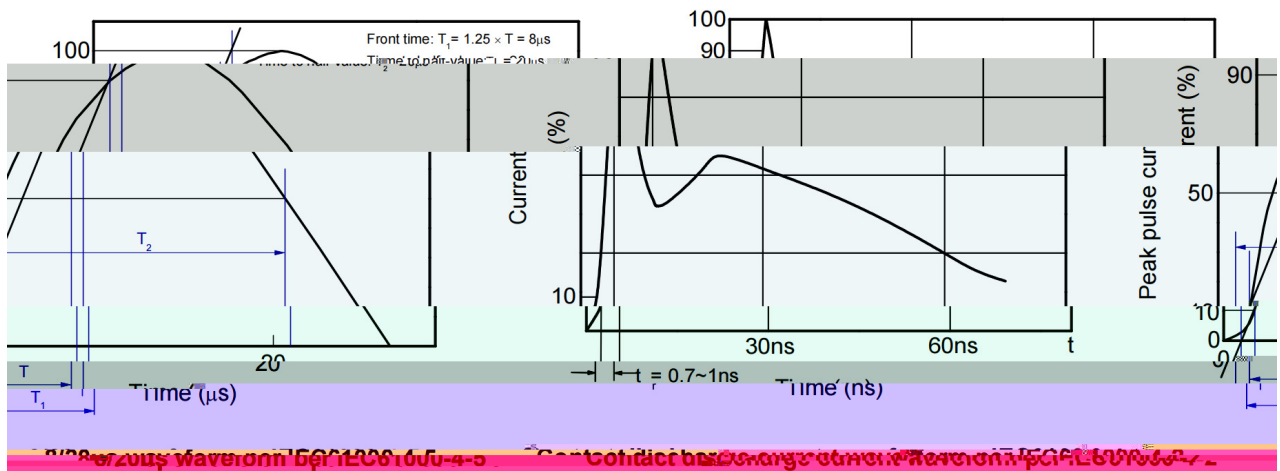
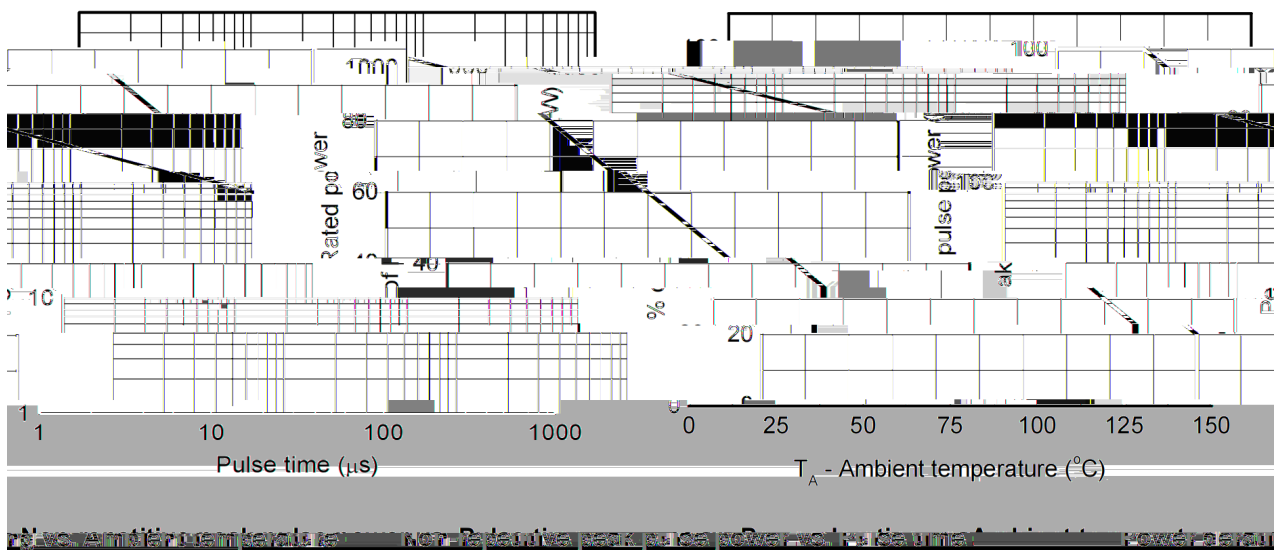
◆◆◆◆◆

1 8

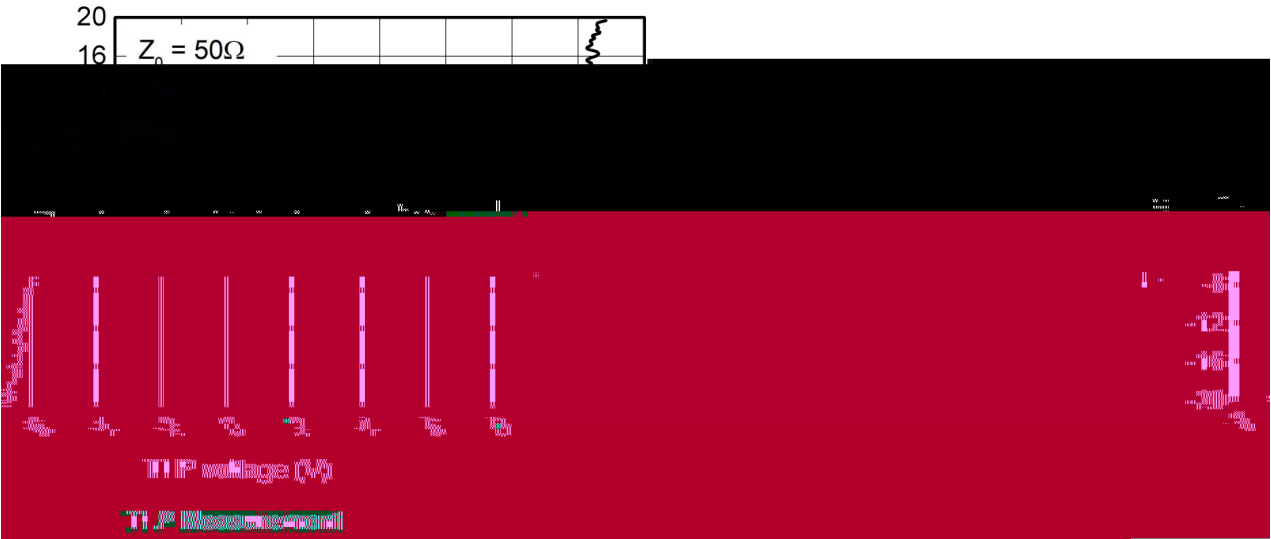
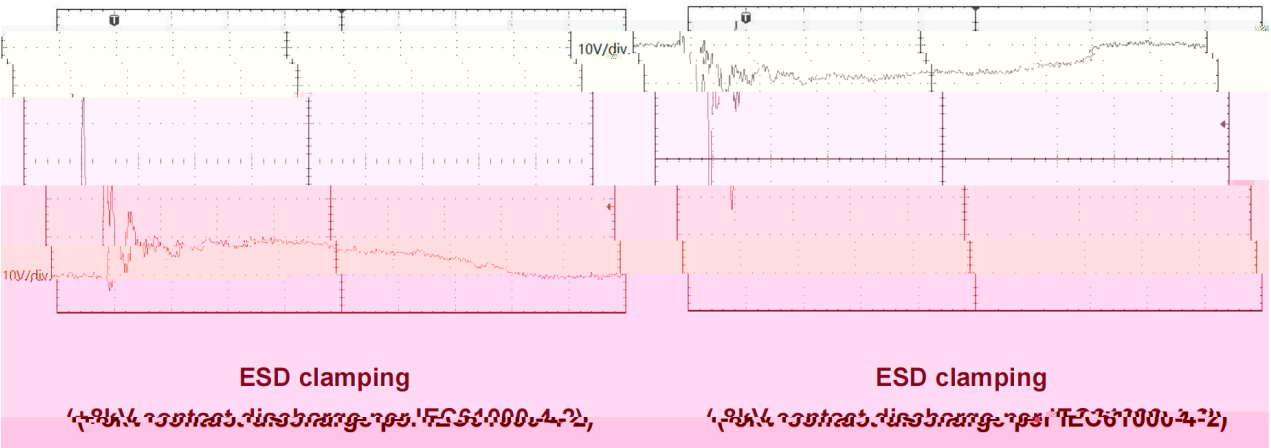
/ Absolute Maximum Ratings(Ta=25)

μ			
μ			
		$\pm$	
		$\pm$	

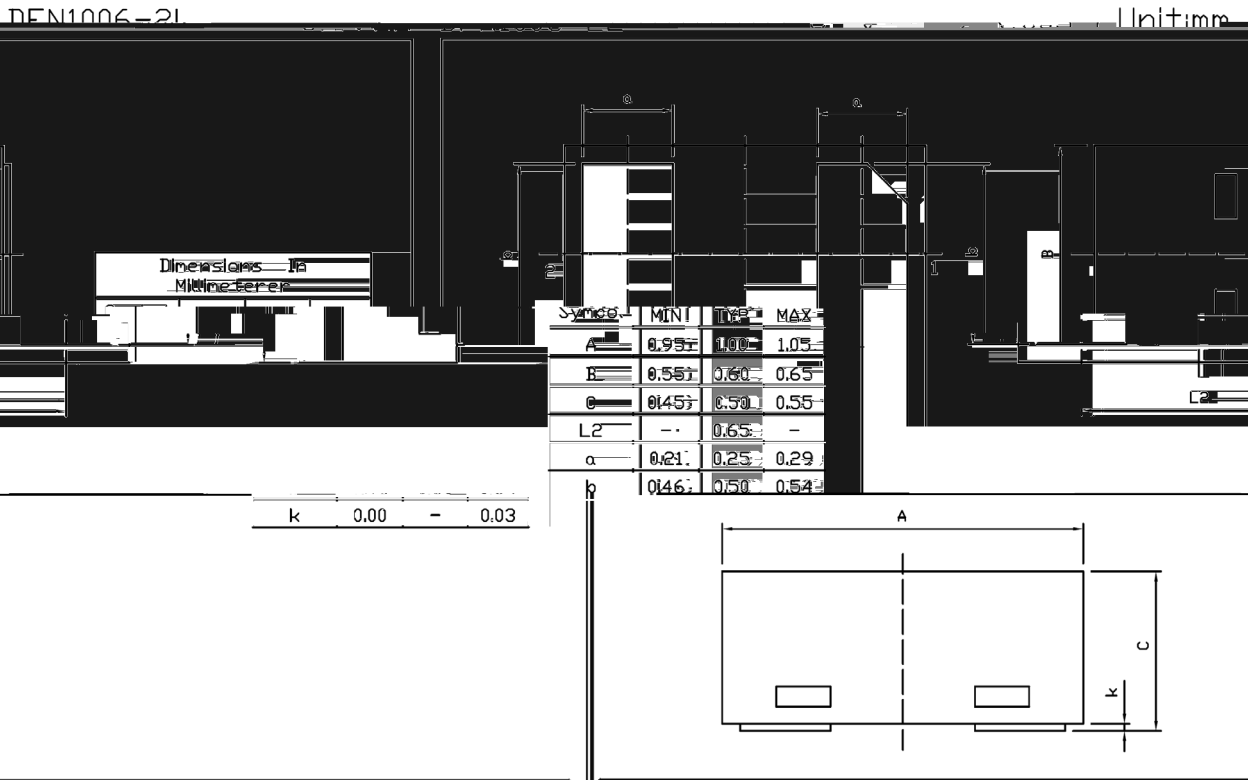
Definitions of electrical characteristics

/ Electrical Characteristic Curve(Ta=25 unless otherwise noted)

Clamping voltage vs. Peak pulse current Capacitance vs. Reverse voltage


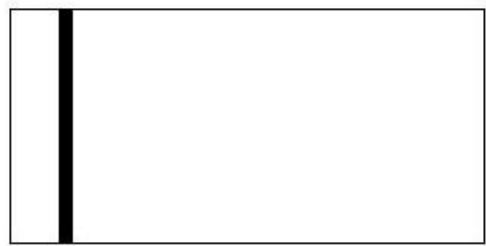
/ Electrical Characteristic Curve Ta=25 unless otherwise noted



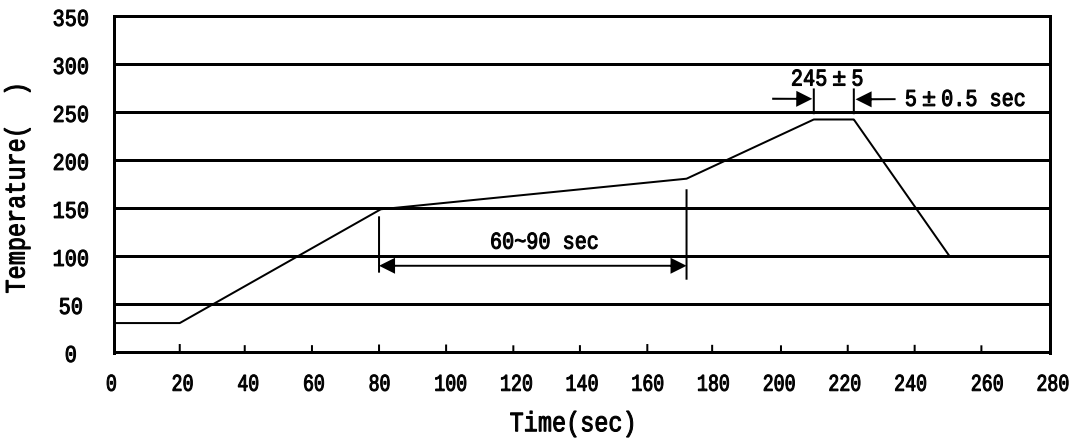
/ Package Dimensions



BRES4V5M1B2ZP



() / Temperature Profile for IR Reflow Soldering(Pb-Free)



± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

						"		

/ Notices