

/ Descriptions

DFN1006-2L

ESD

/ Features

1ns

20KV

IEC61000-4-2

4

ESD


AEC-Q101

Ultra small package, Response Time is Typically < 1 ns, ESD > 20 kV per Human Body Model, IEC61000-4-2 Level 4 ESD Protection, Qualified to AEC-Q101 Standards for High Reliability, HF Product.


/ Applications

MP3

/ Equivalent Circuit

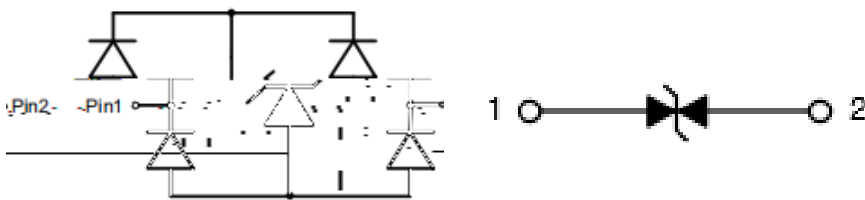

/ Pinning


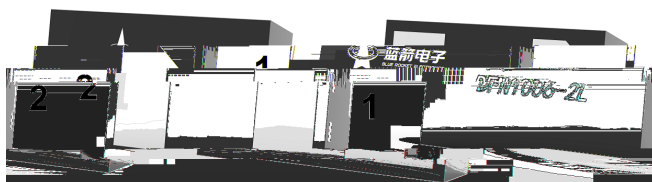


/ Marking

μ			
μ			
		$\pm$	
		$\pm$	

Definitions of electrical characteristics


/ Electrical Characteristic Curve(Ta=25)

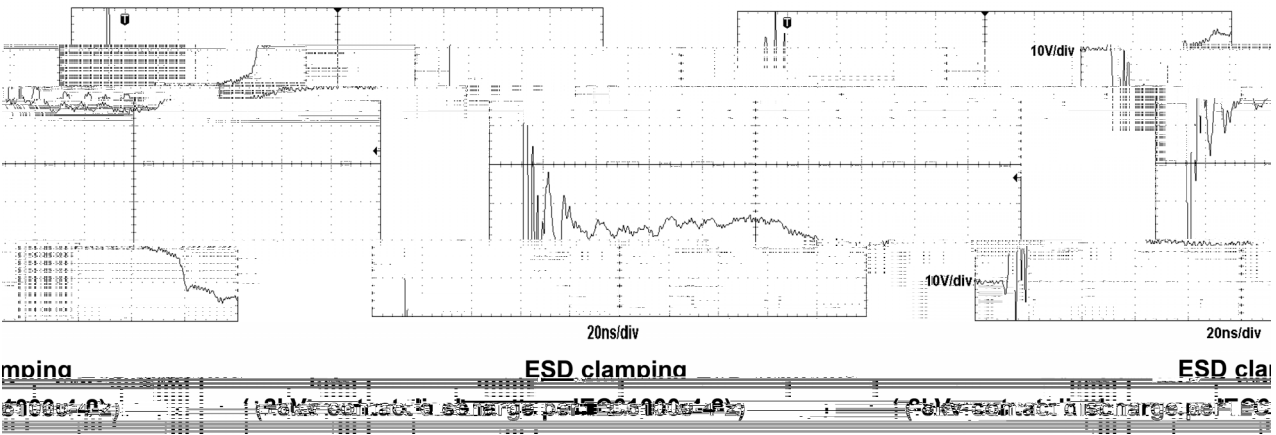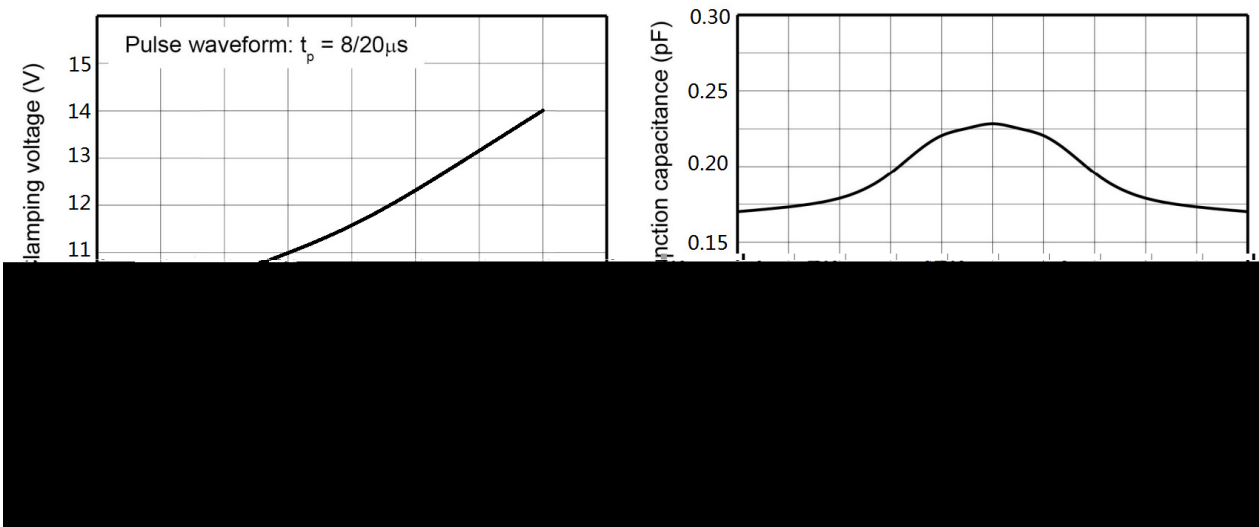

/ Package Dimensions

DFN1006-2L

Unit:mm

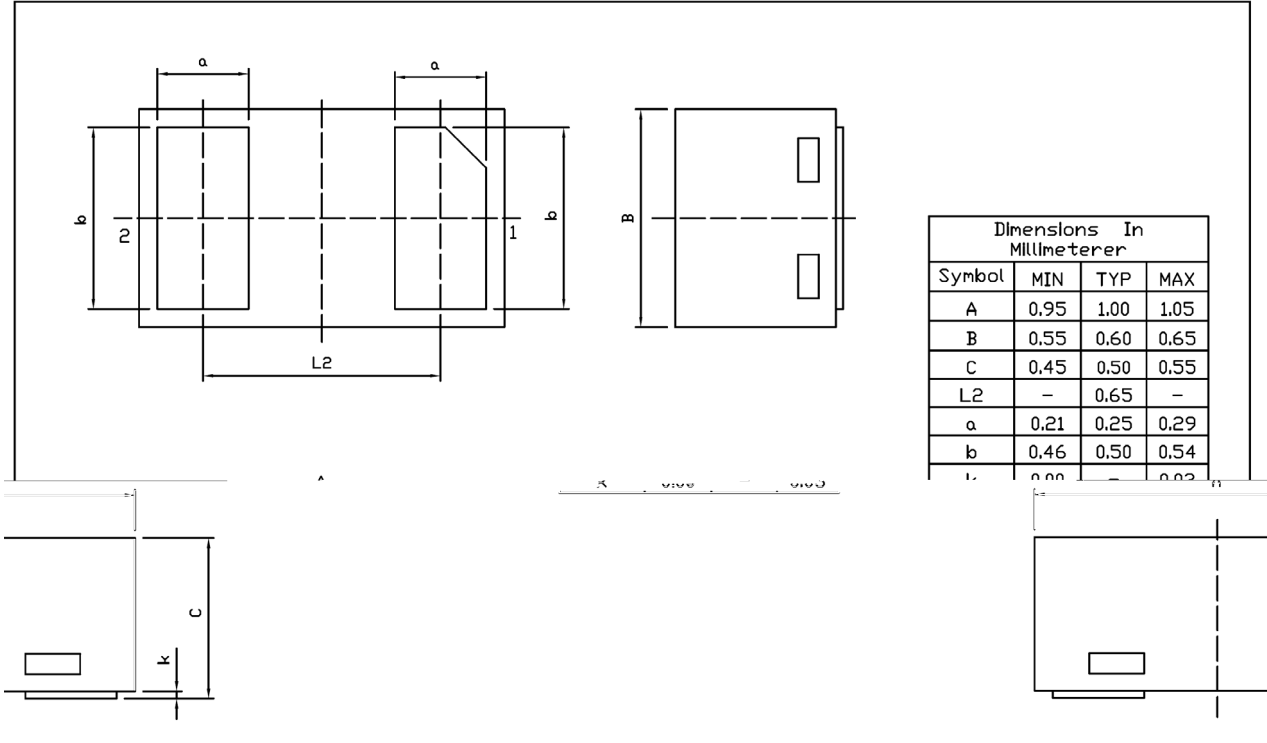

Rev.01 202108

/ Marking Instructions



5U

