



650V

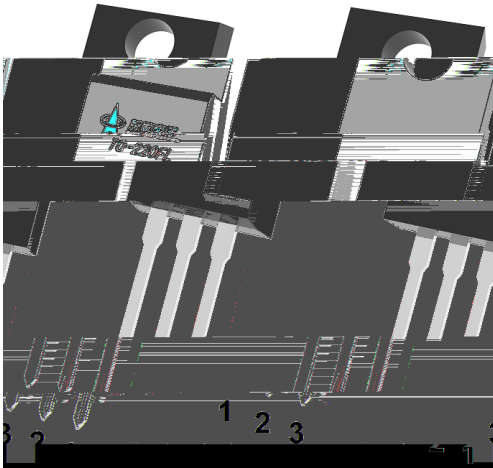



		μ				

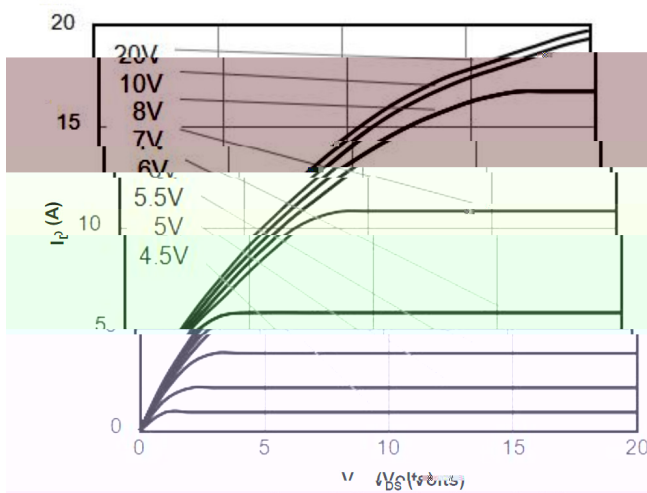


Figure 1: On-Region Characteristics

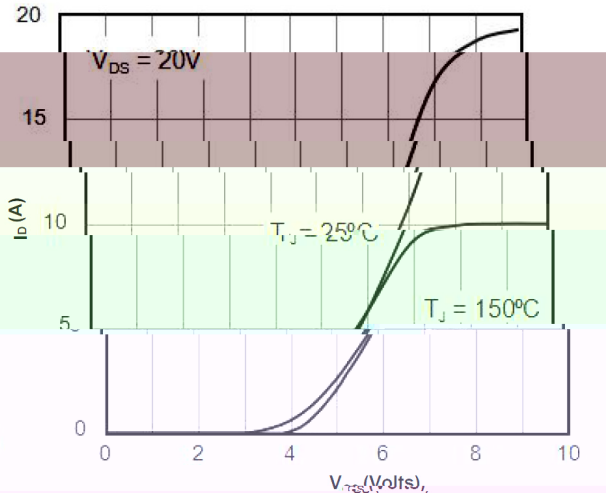


Figure 2: Transfer Characteristics

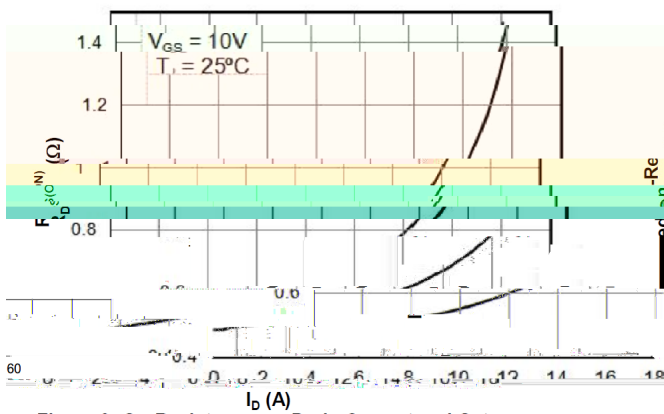


Figure 3: On-Resistance vs. Drain Current and Gate Voltage

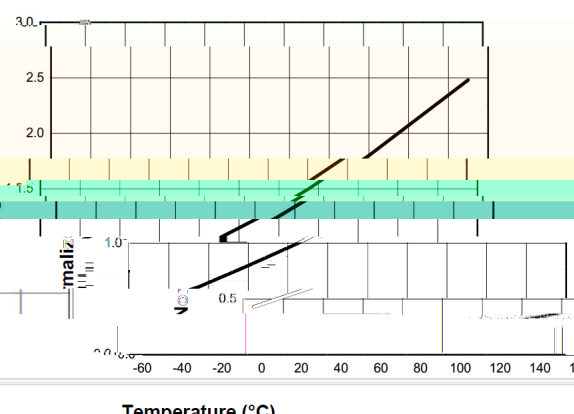


Figure 4: On-Resistance vs. Junction Temperature

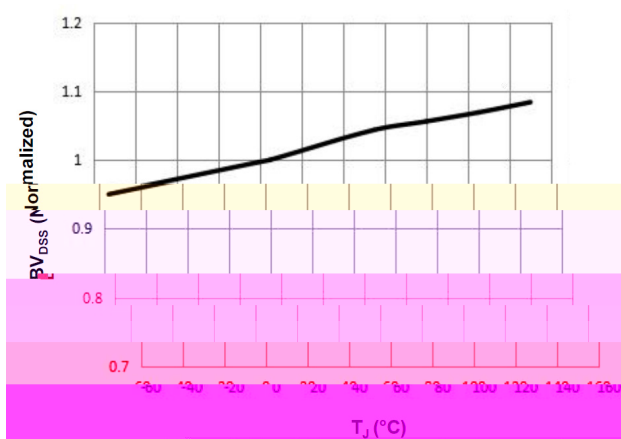


Figure 5: Normalized On-Resistance vs. Junction Temperature

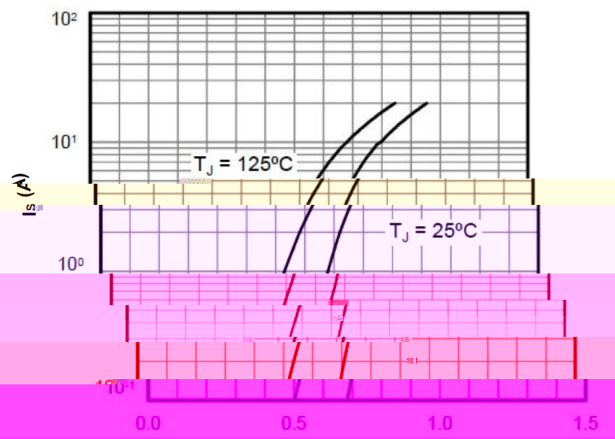


Figure 6: On-Resistance vs. Drain Current and Junction Temperature

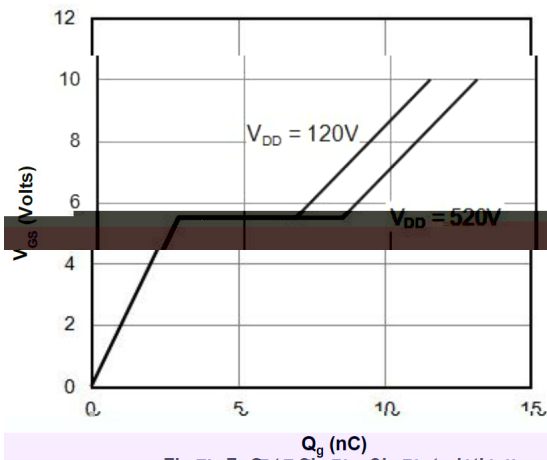


Figure 7: Gate-Charge Characteristics

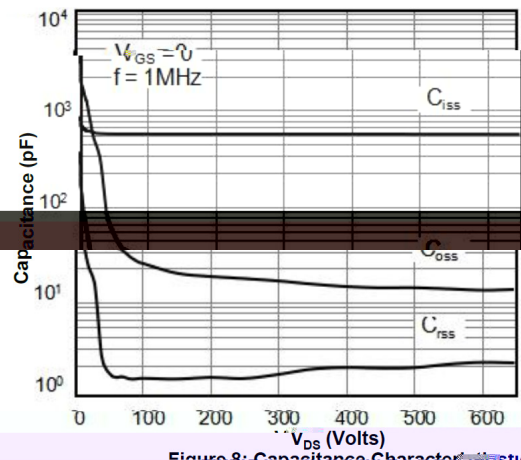


Figure 8: Capacitance Characteristics



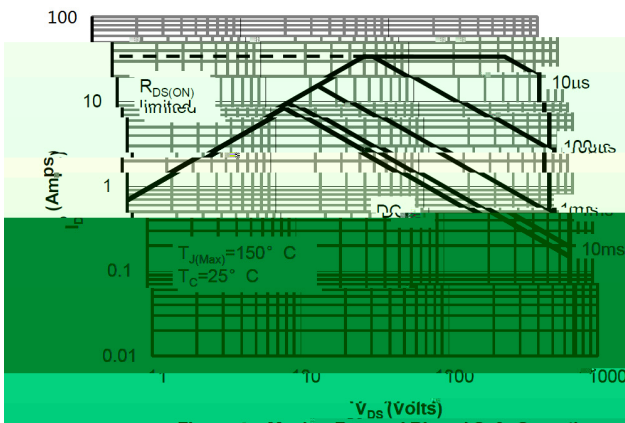


Figure 9: Maximum Allowable Power Dissipation

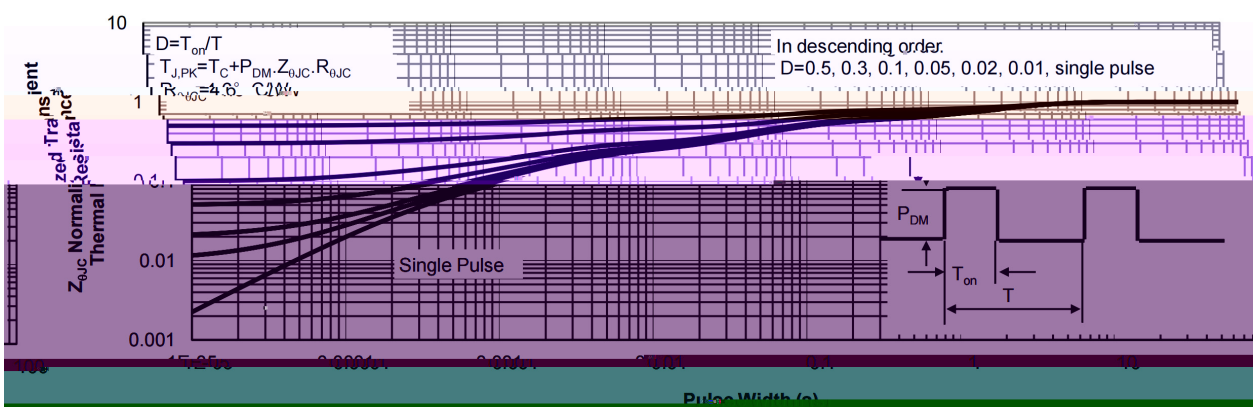



TQ-220FL

单位: mm

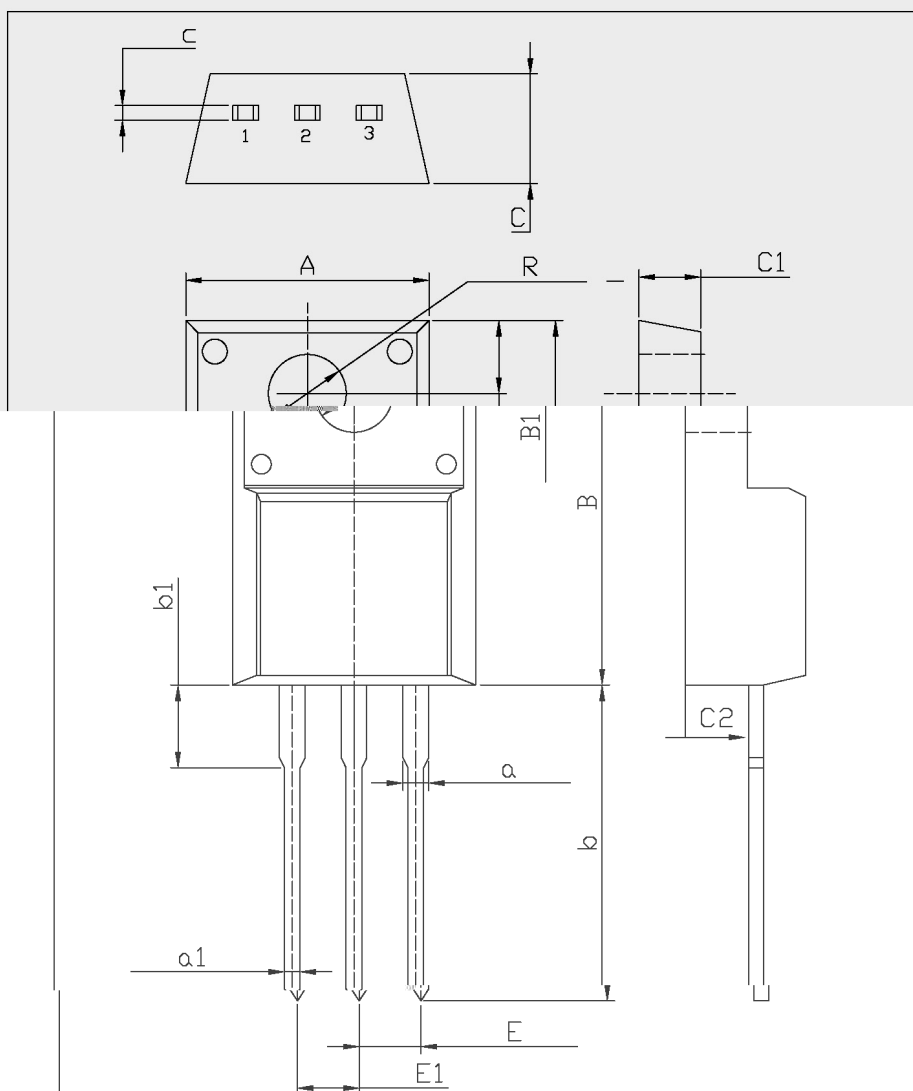

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
C	4.5	4.7	B1	3.30	3.50
C	0.4	0.6	a	1.08	1.48
A	15.67	16.07	b1	2.34	2.74
B	15.67	16.07	E	2.34	2.74
B1	3.30	3.50	E1	2.34	2.74
R	3.08	3.28	C1	2.34	2.74

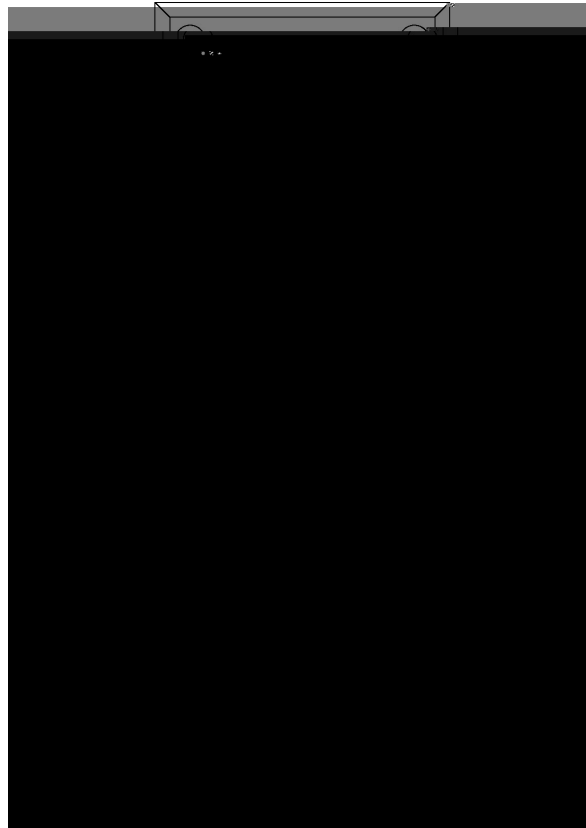

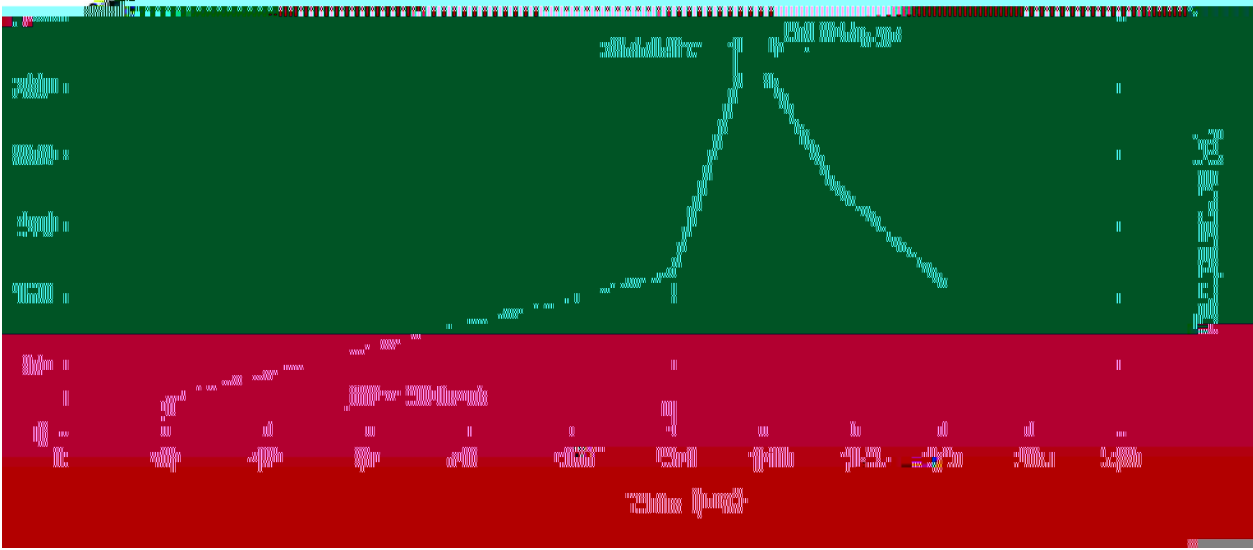

±

±

±

±

±

±

	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box