


/ Descriptions

700V


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning

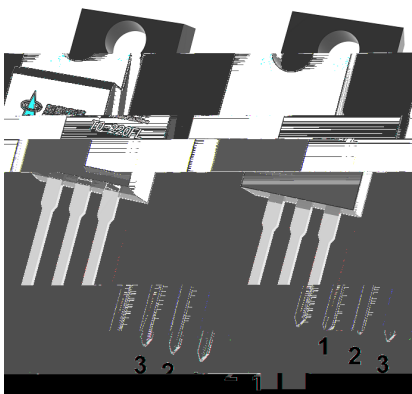

/ Marking

/ Absolute Maximum Ratings(Ta=25)

	θ		
	θ		




/ Electrical Characteristics(Ta=25)

		μ				
						μ
		μ				
						Ω
						Ω
		Ω				

/ Electrical Characteristics(Ta=25)

		μ				

/ Electrical Characteristic Curve

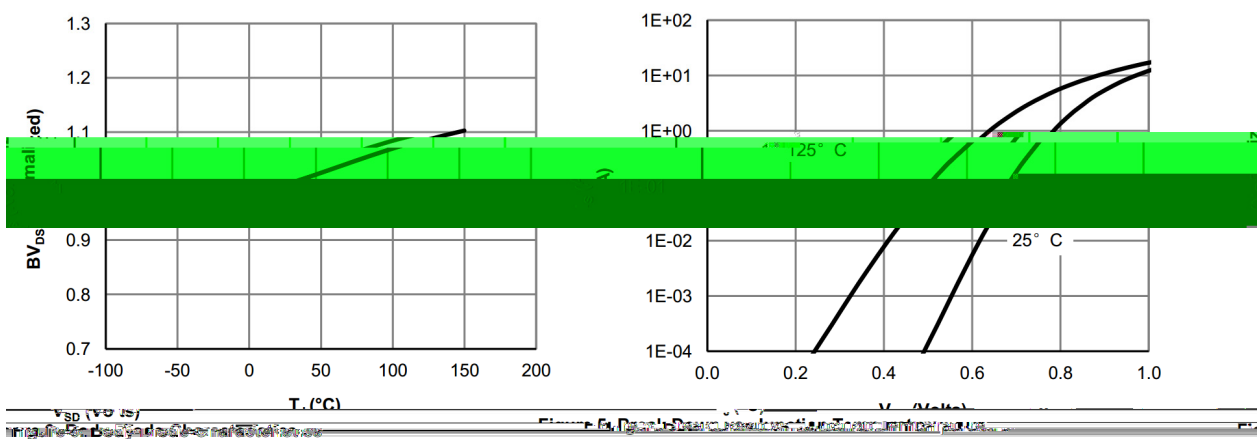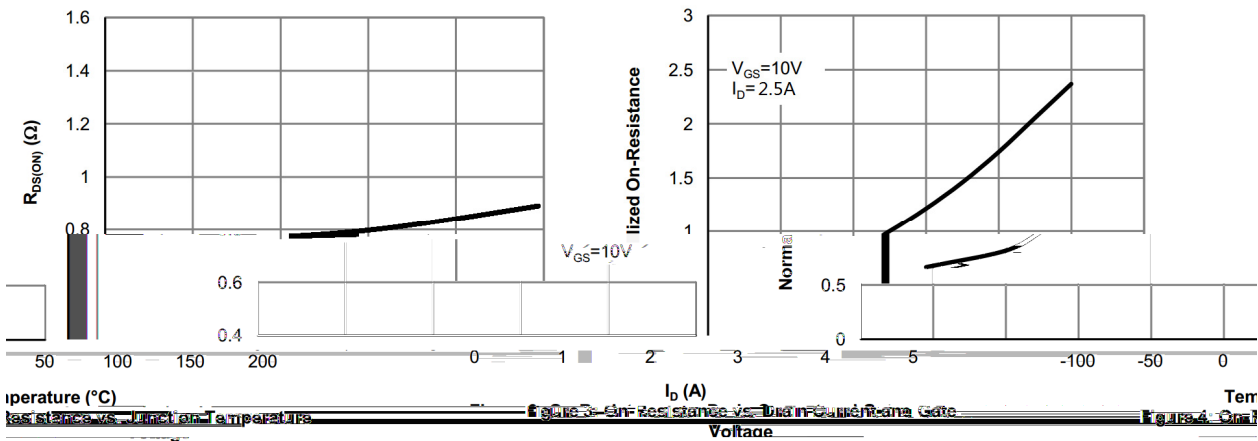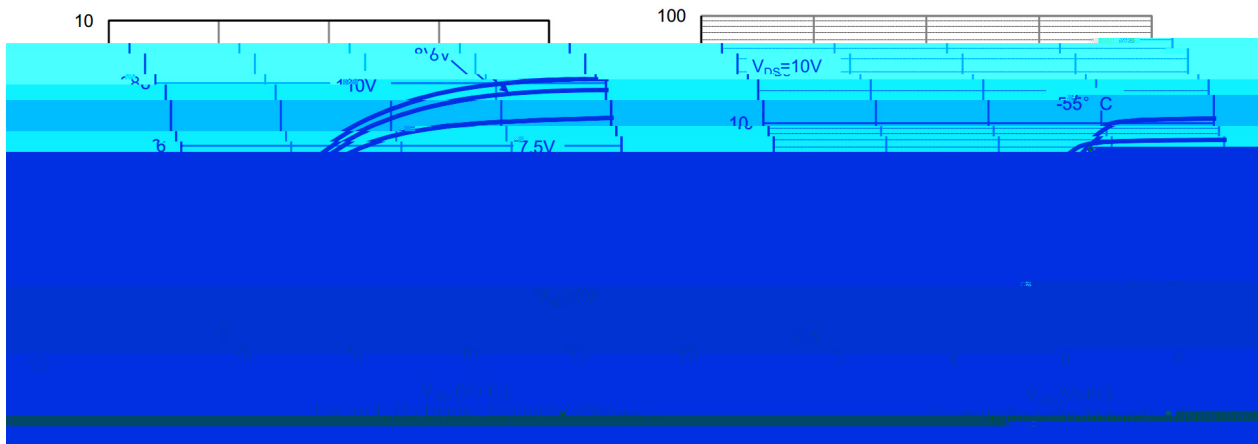

/ Electrical Characteristic Curve


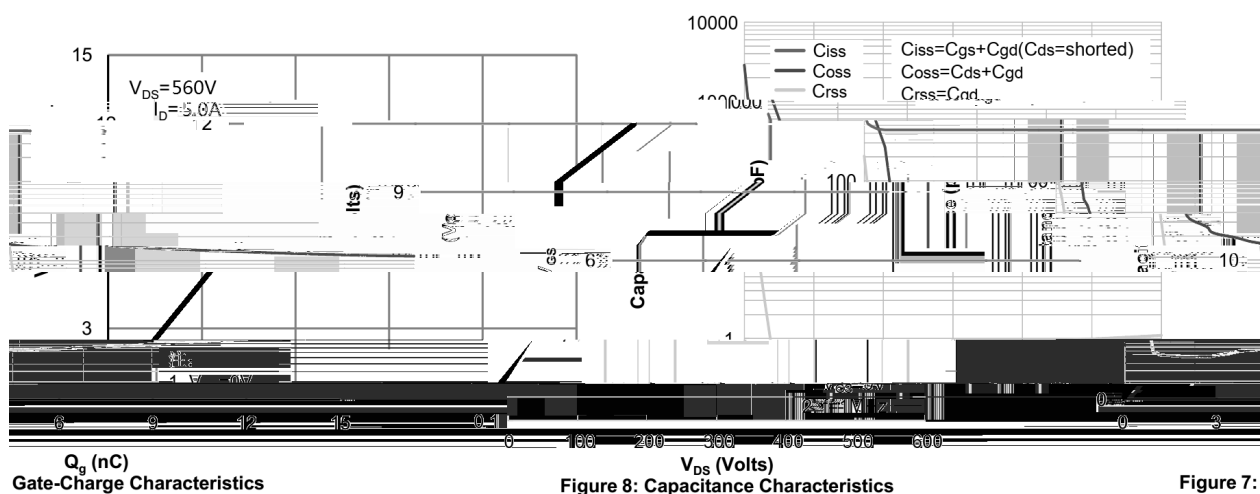


Figure 7:




BRFL70R900C

/ Marking Instructions

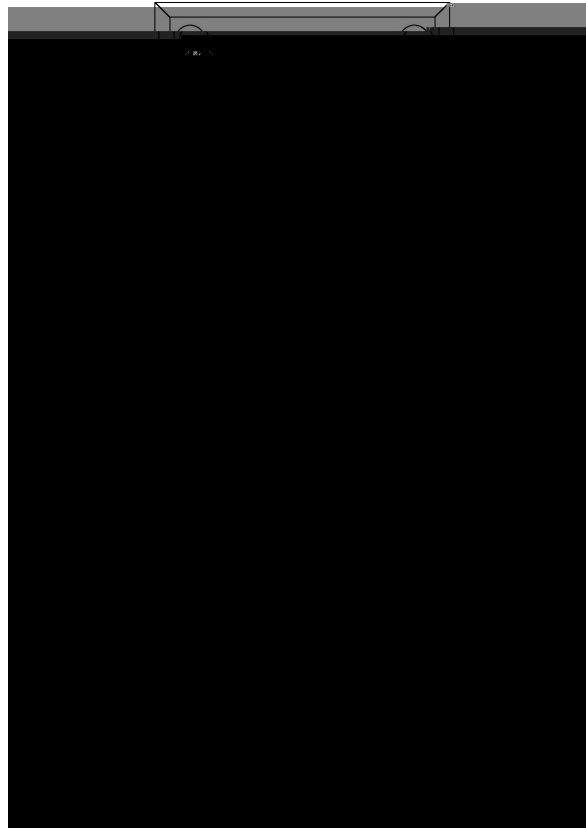

() / Temperature Profile for Dip Soldering(Pb-Free)

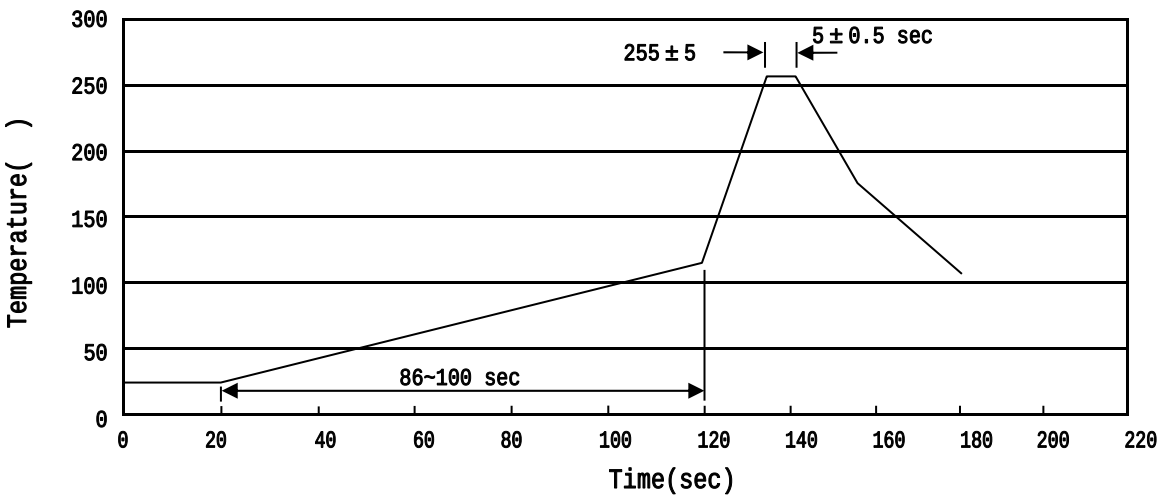

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box

/ Notices