


描述

特征


用途

DC/DC

内部等效电路



引脚排列

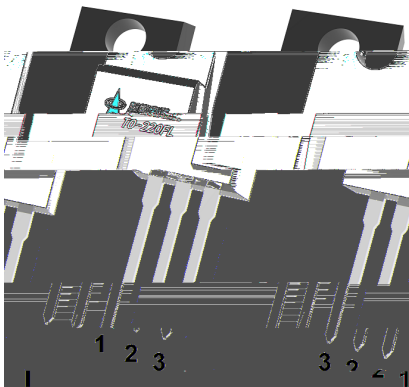

印章代码

极限参数

°C


	θ		

电性能参数


°C

		μ				
						μ
						μ
		μ				
						Ω
		Ω				

电参数曲线图

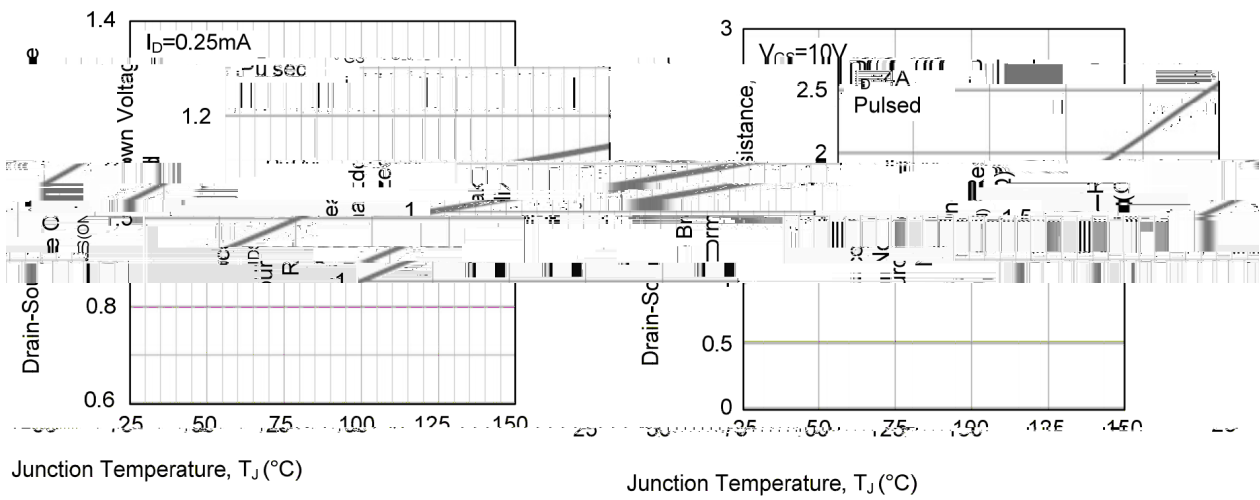


1. Drain-Source On-Resistance vs. Junction Temperature
2. Drain-Source On-Resistance vs. Junction Temperature (Pulsed)

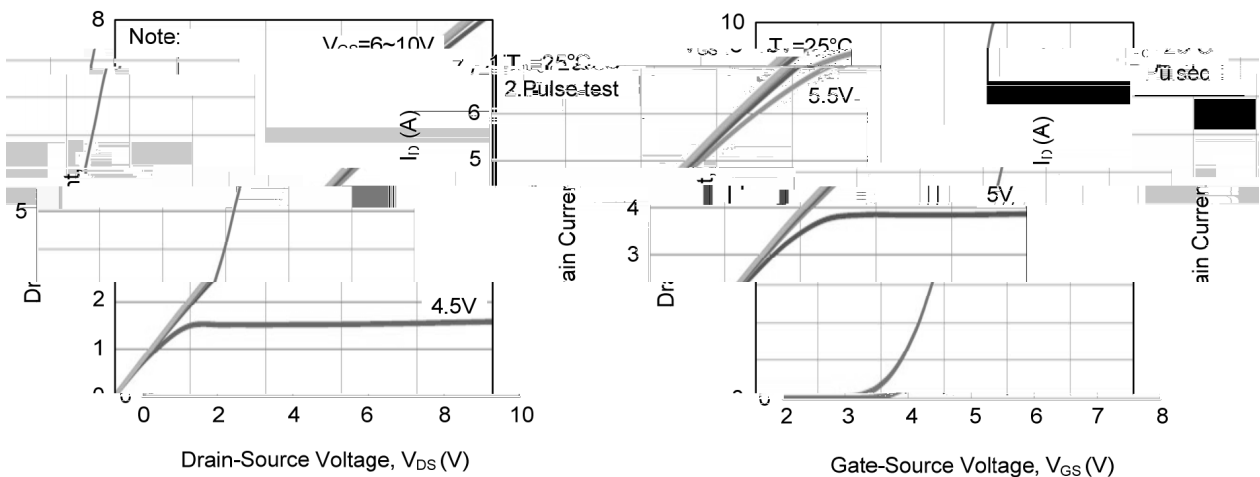

3. Drain Current vs. Drain-Source Voltage

4. Drain Current vs. Gate-Source Voltage

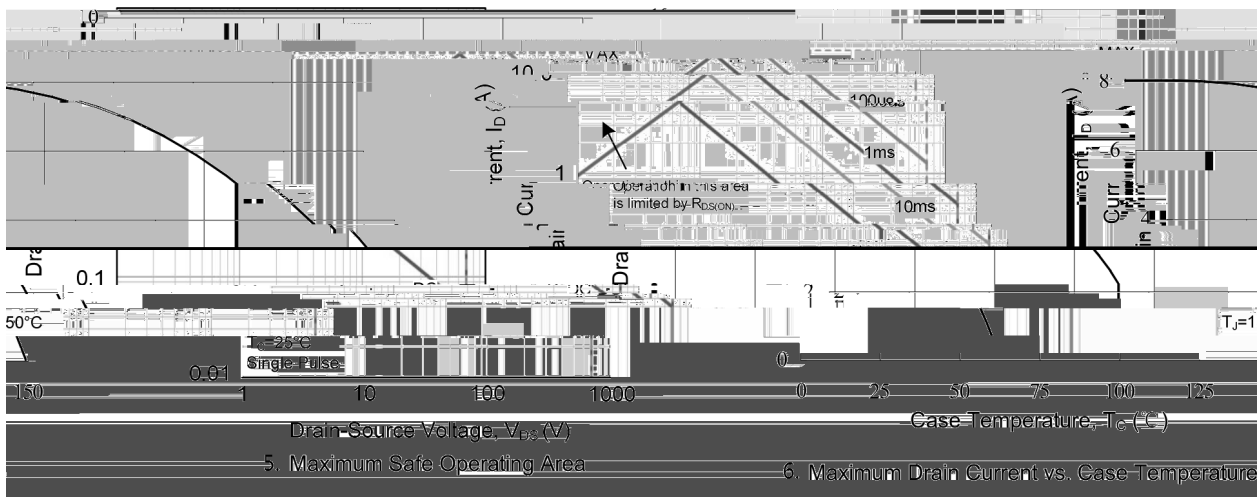


5. Maximum Safe Operating Area

6. Maximum Drain Current vs. Case Temperature


外形尺寸图

T11-220FL


单位: mm

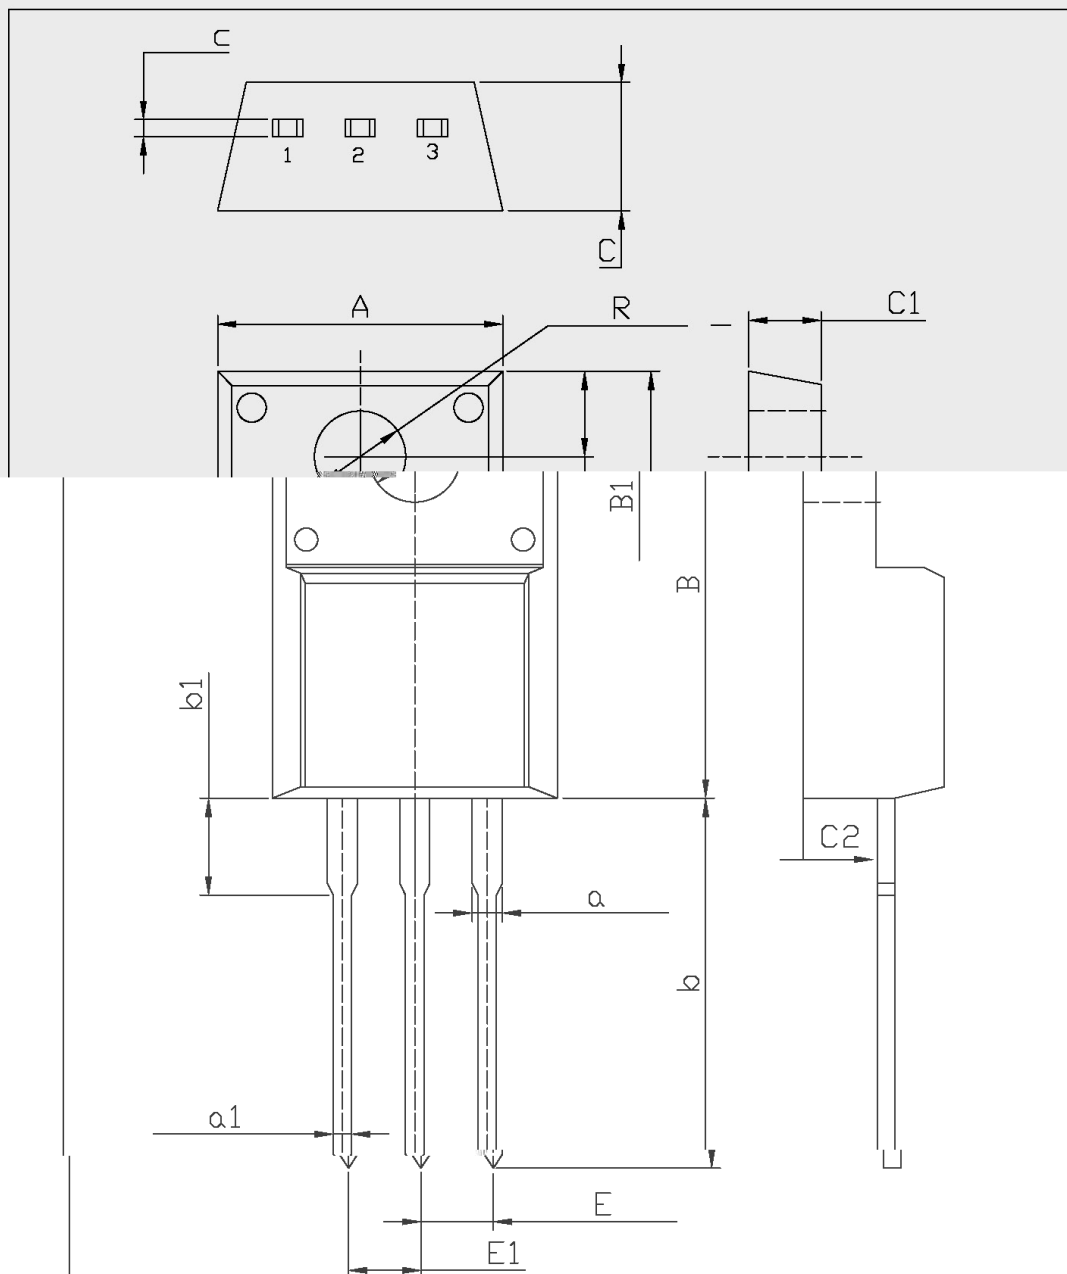

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
C	4.5	4.7	b1	22.50	23.50
C	0.4	0.6	a	1.08	1.48
A	9.50	10.50	a1	2.00	0.90
B	15.67	16.07	E	2.34	2.74
B1	3.30	3.50	E1	2.34	2.74
R	3.08	3.28	C1	2.34	2.74

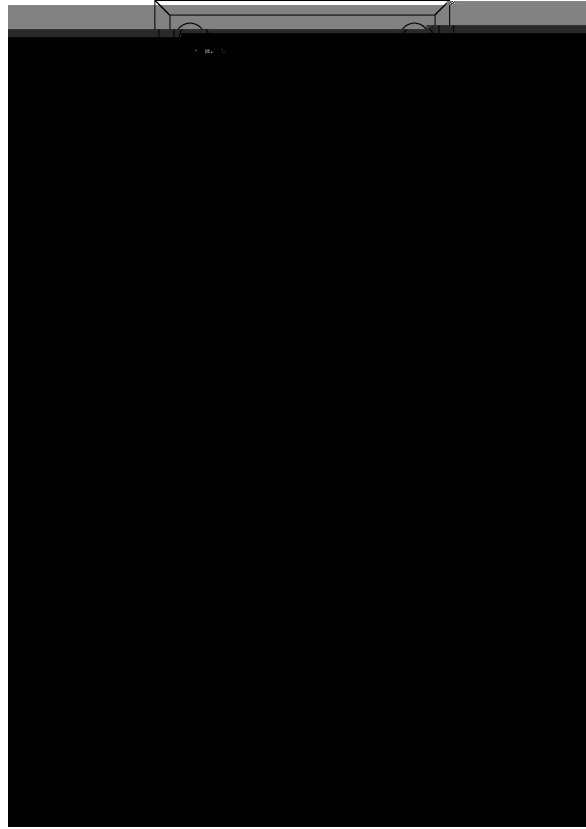

波峰焊温度曲线图 无铅

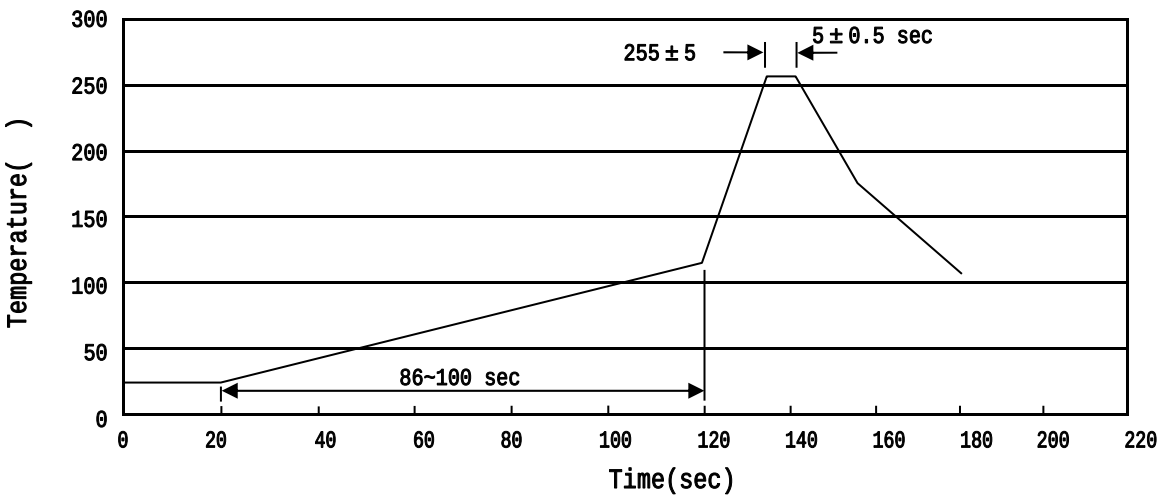

± ± ± ±

耐焊接热试验条件

± ±

包装规格

	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box

使用说明