

/ Descriptions


WR06S

/ Features


UrKV

/ Applications

/ Equivalent Circuit



/ Pinning



/ h_{FE} Classifications & Marking

/ Absolute Maximum Ratings(Ta=25)

℃			
℃			
℃			
℃			
		~	℃
			℃
			℃
			℃
			℃

/ Electrical Characteristics(Ta=25)


/ Electrical Characteristics(Ta=25)

		Ω				
		μ				


/ Package Dimensions

TU-3P

單位: 

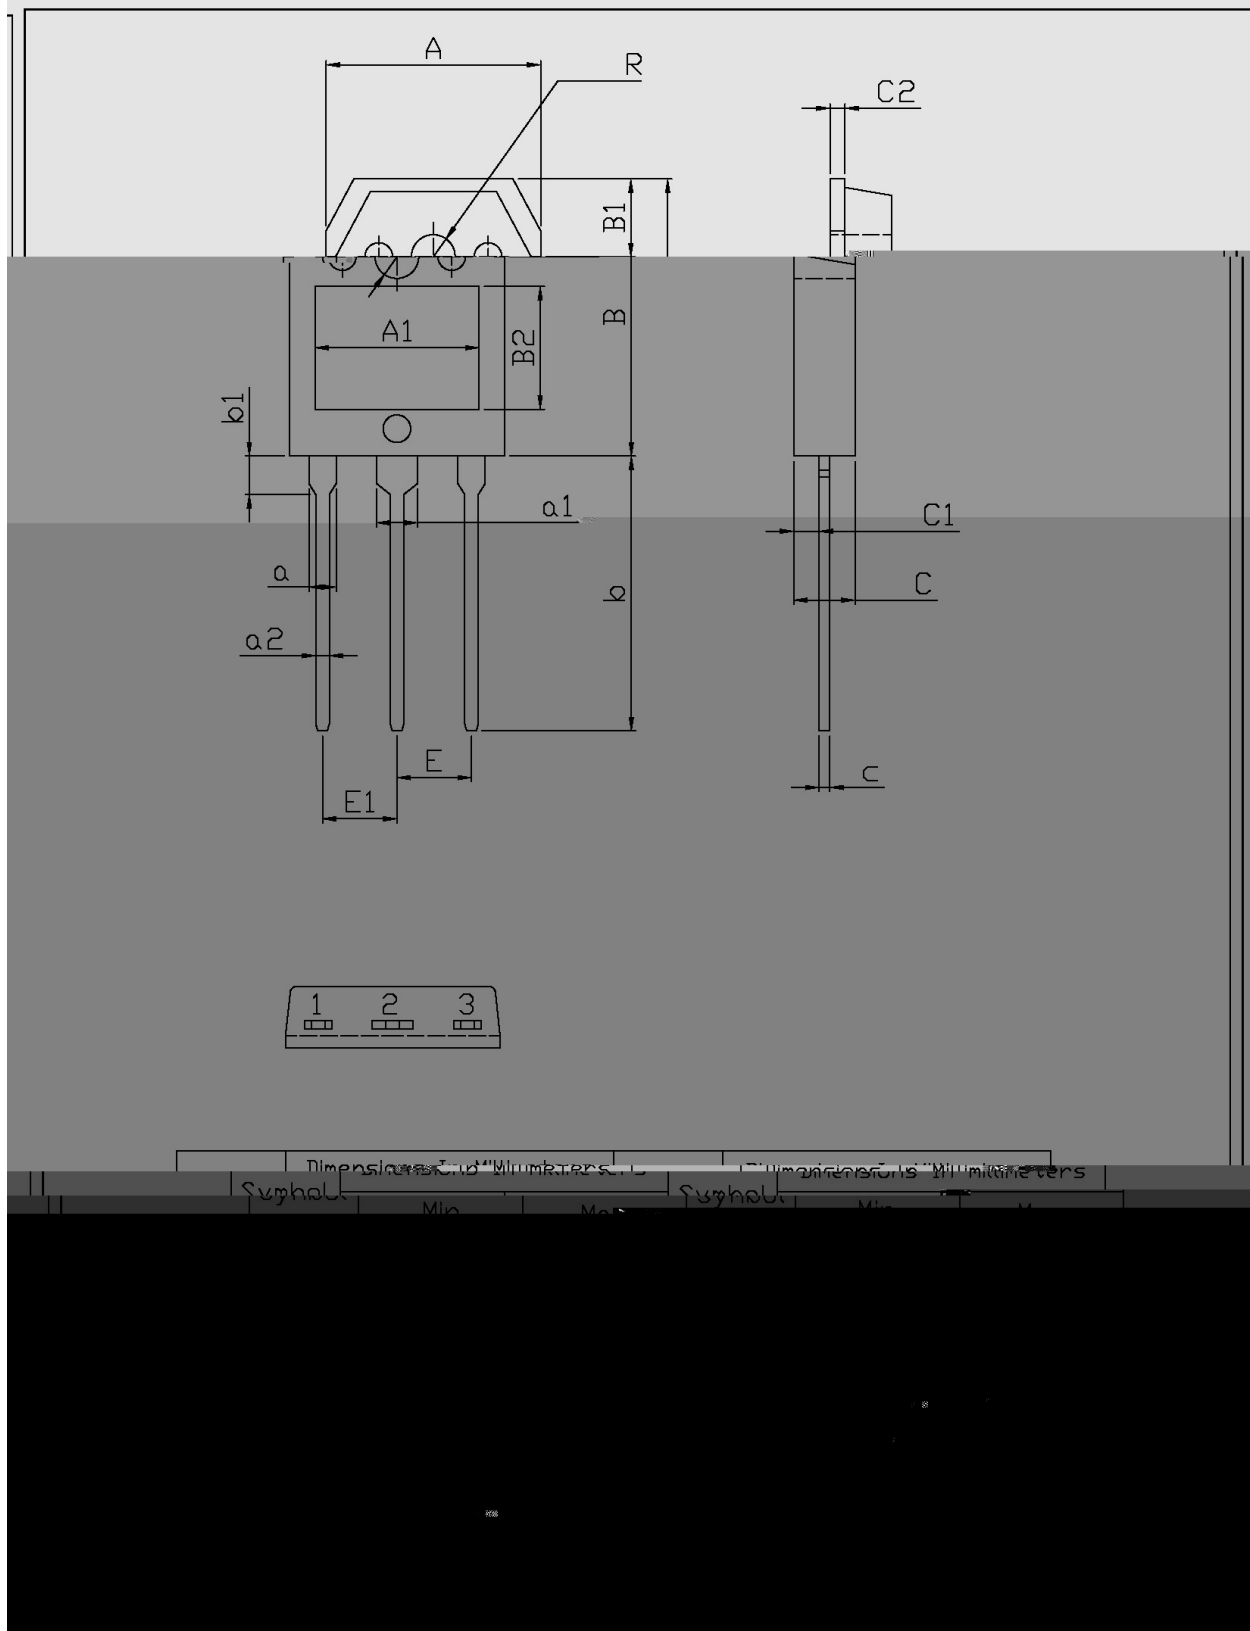


/ Marking Instructions

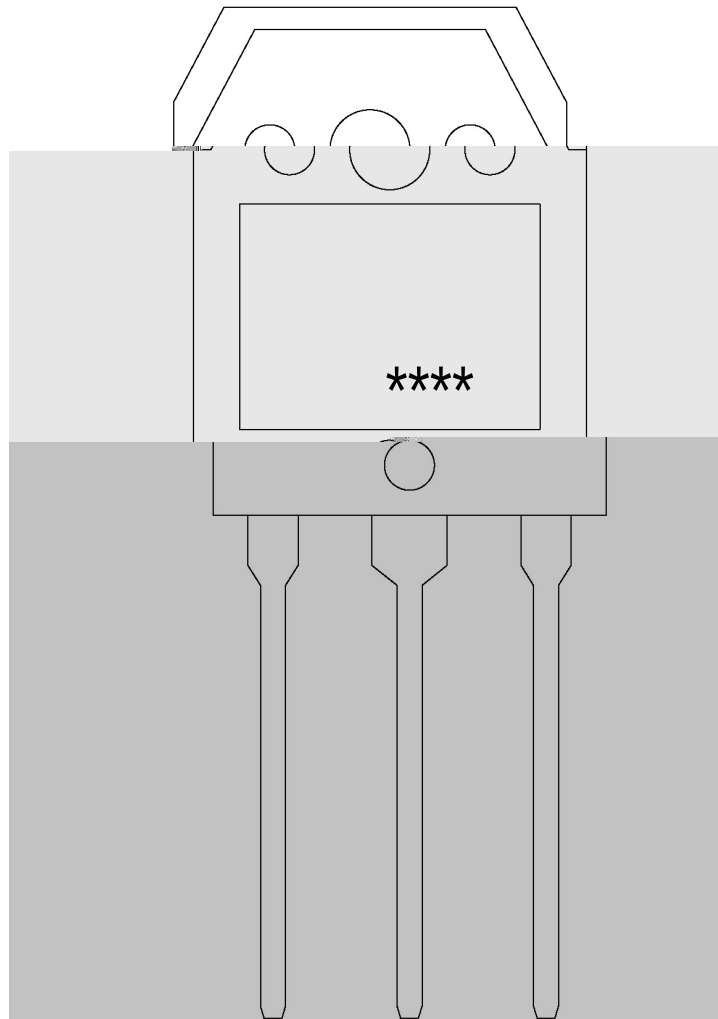

EU:-
J58Q453G

() / Temperature Profile for Dip Soldering(Pb-Free)

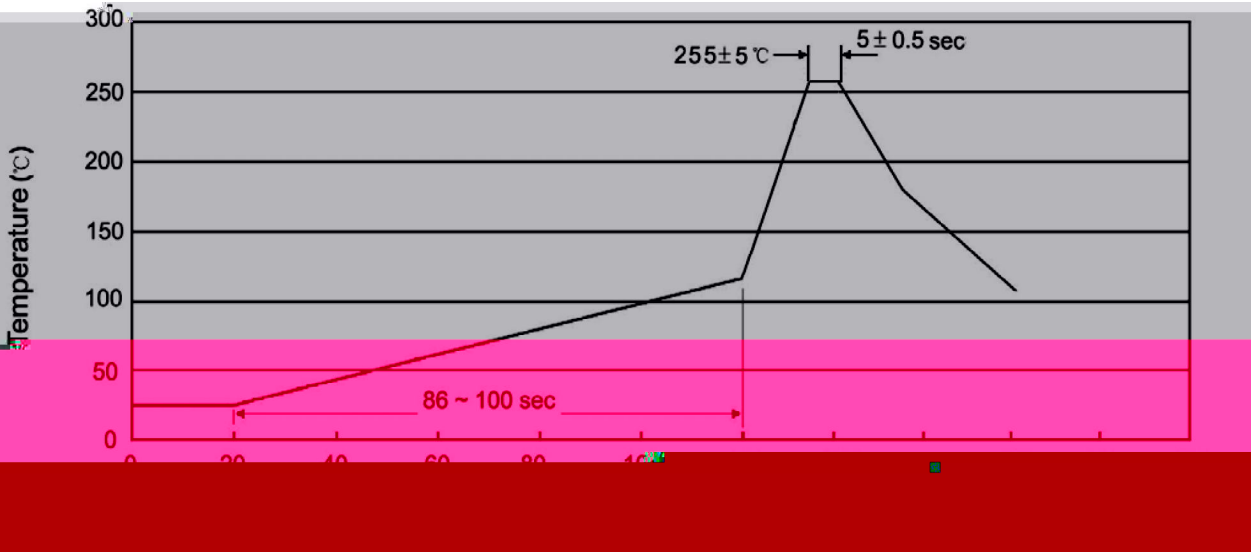

$\frac{3}{8}$ $\frac{3}{8}$
2 $\frac{3}{8}$ 2 2 $\frac{3}{8}$ 2
 $\frac{3}{8}$ $\frac{3}{8}$

/ Resistance to Soldering Heat Test Conditions

2 $\frac{3}{8}$ 2 °C

/ Packaging SPEC.

	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box
TO-3P	30	15	450	5	2250	497.5×46×8	555×164×50	575 290 180

/ Notices