


/ Descriptions

/ Features


, $R_{DS(on)}$,

/ Applications

/ Equivalent Circuit



/ Pinning



/ Marking

/ Absolute Maximum Ratings(Ta=25)

(°C)			
	θ		
	θ		

/ Electrical Characteristics(Ta=25)


		μ				
						μ
		°C				μ
		μ				
						Ω

/ Electrical Characteristics(Ta=25)

		Ω				
“ ”						
		℃				

:
:
: ≤ ≤

/ Electrical Characteristic Curve

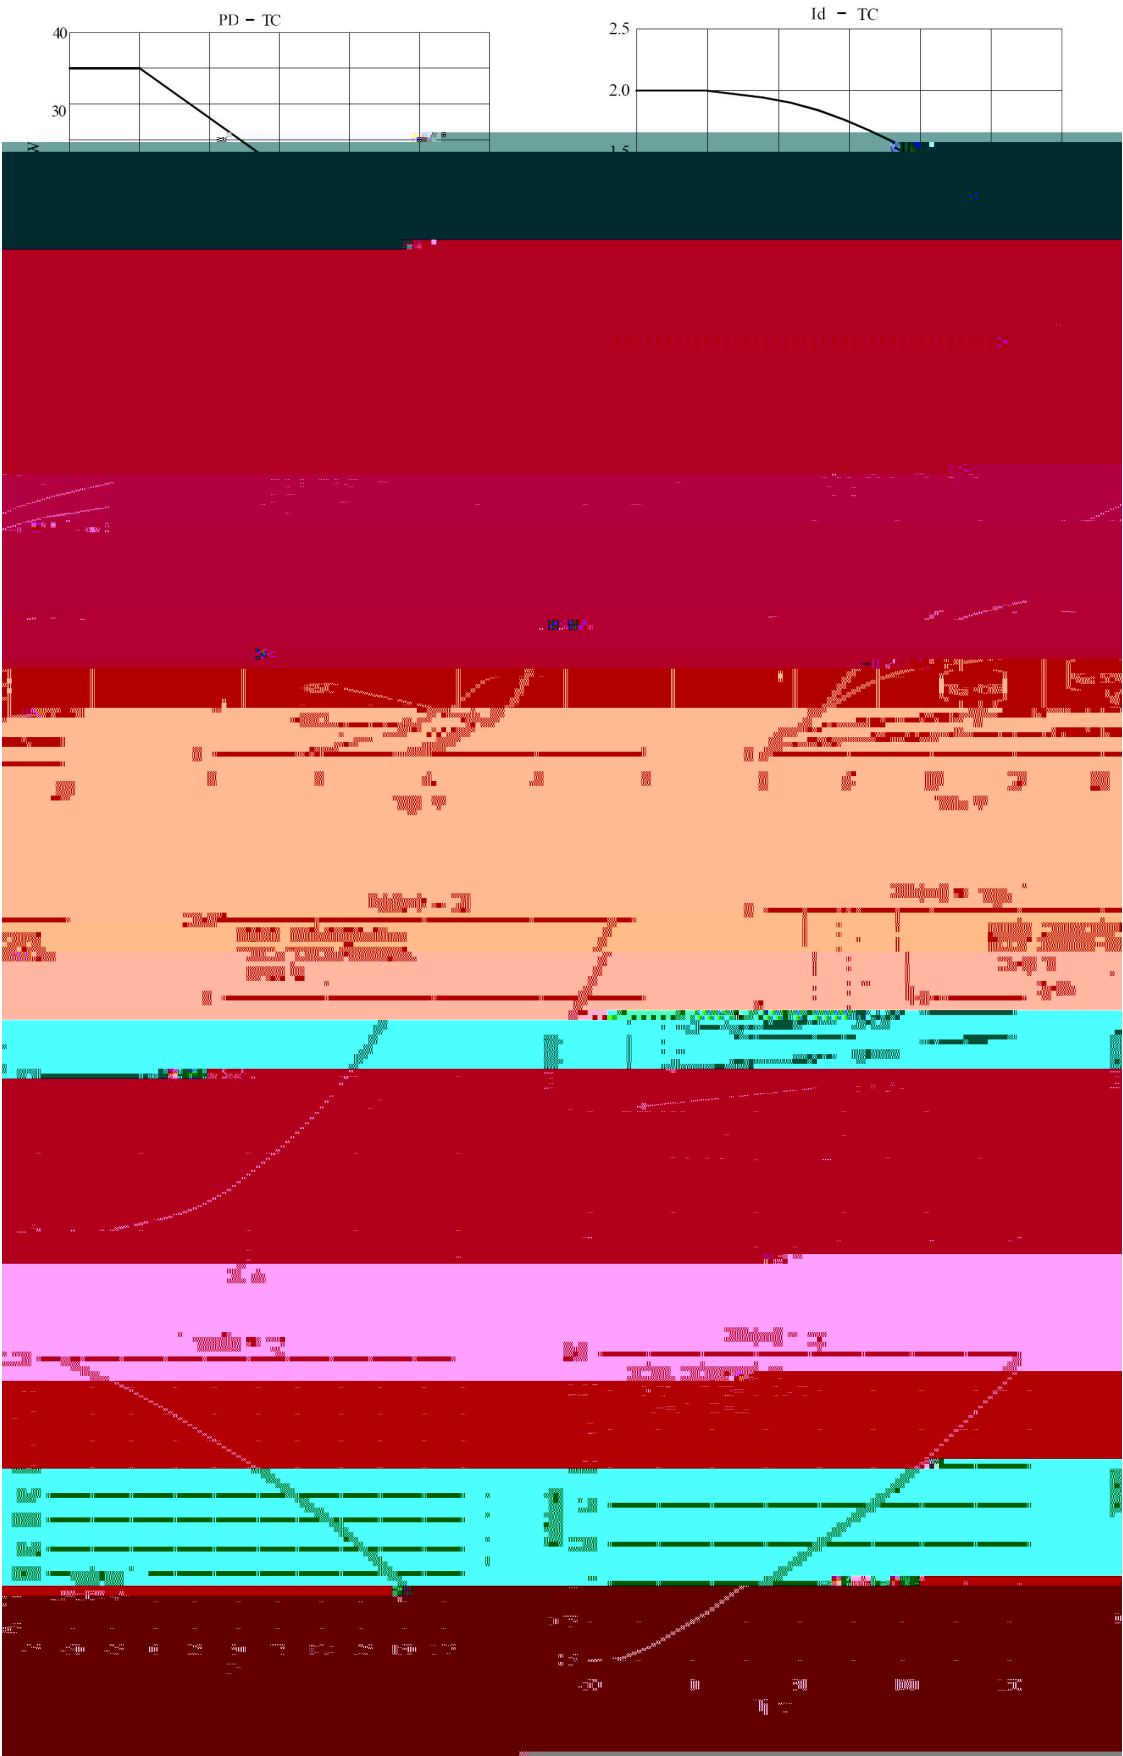


/ Electrical Characteristic Curve




BRI2N70


/ Test Circuit and Waveform Curve

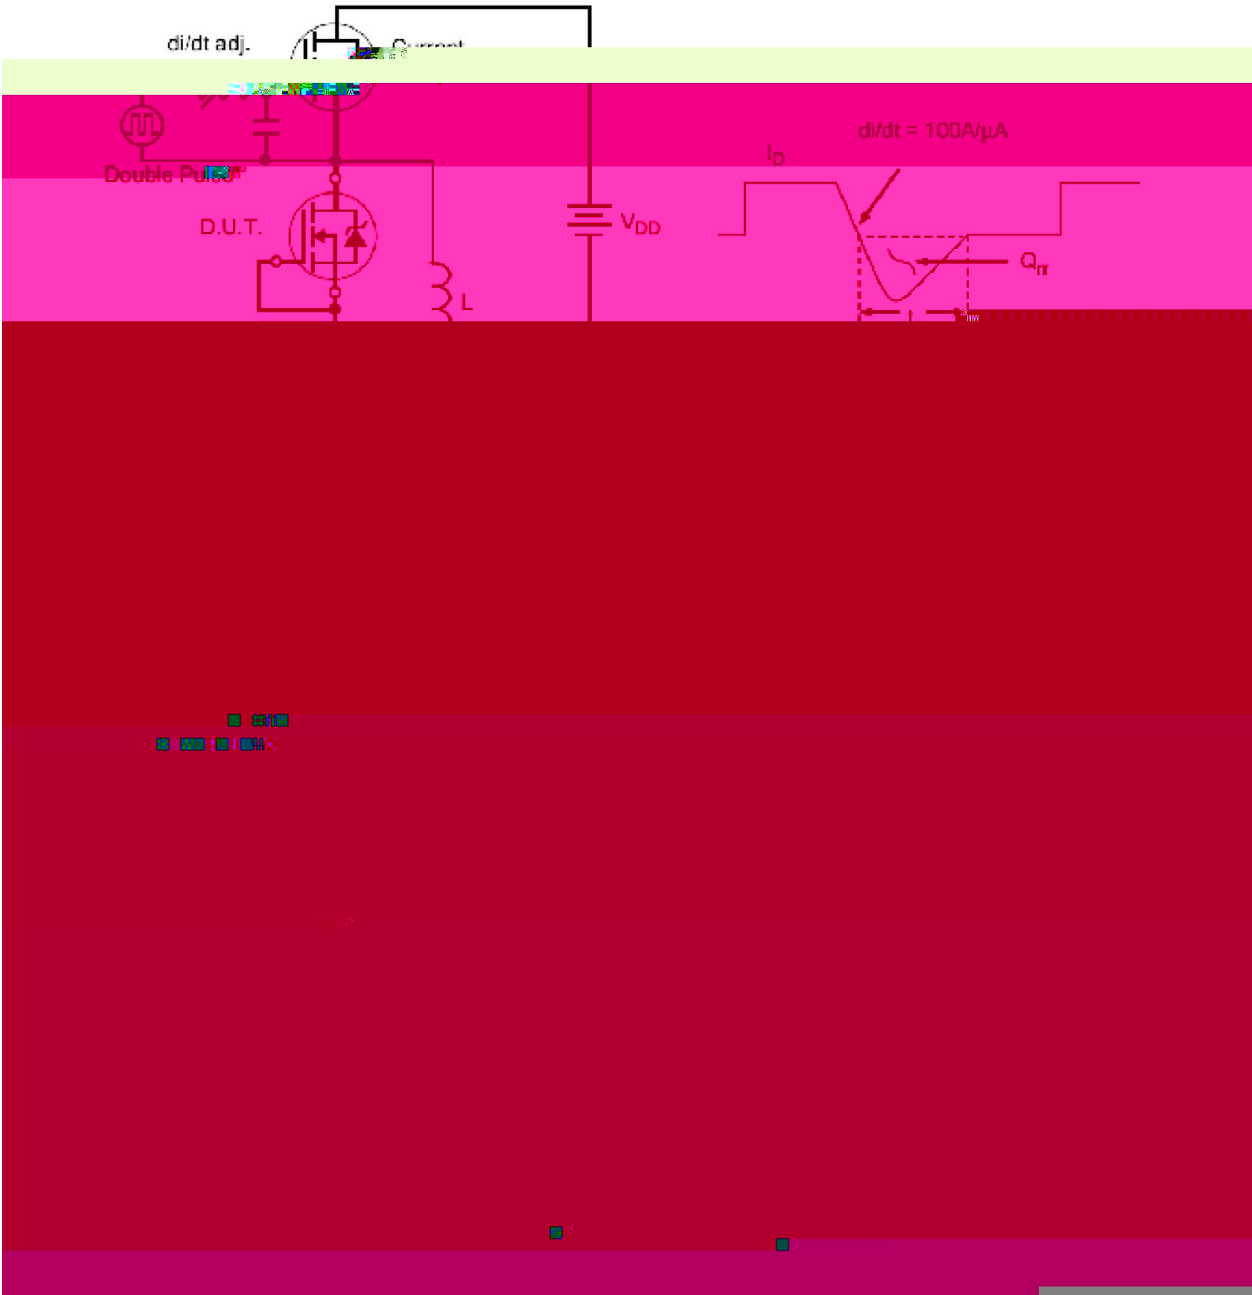


/ Package Dimensions

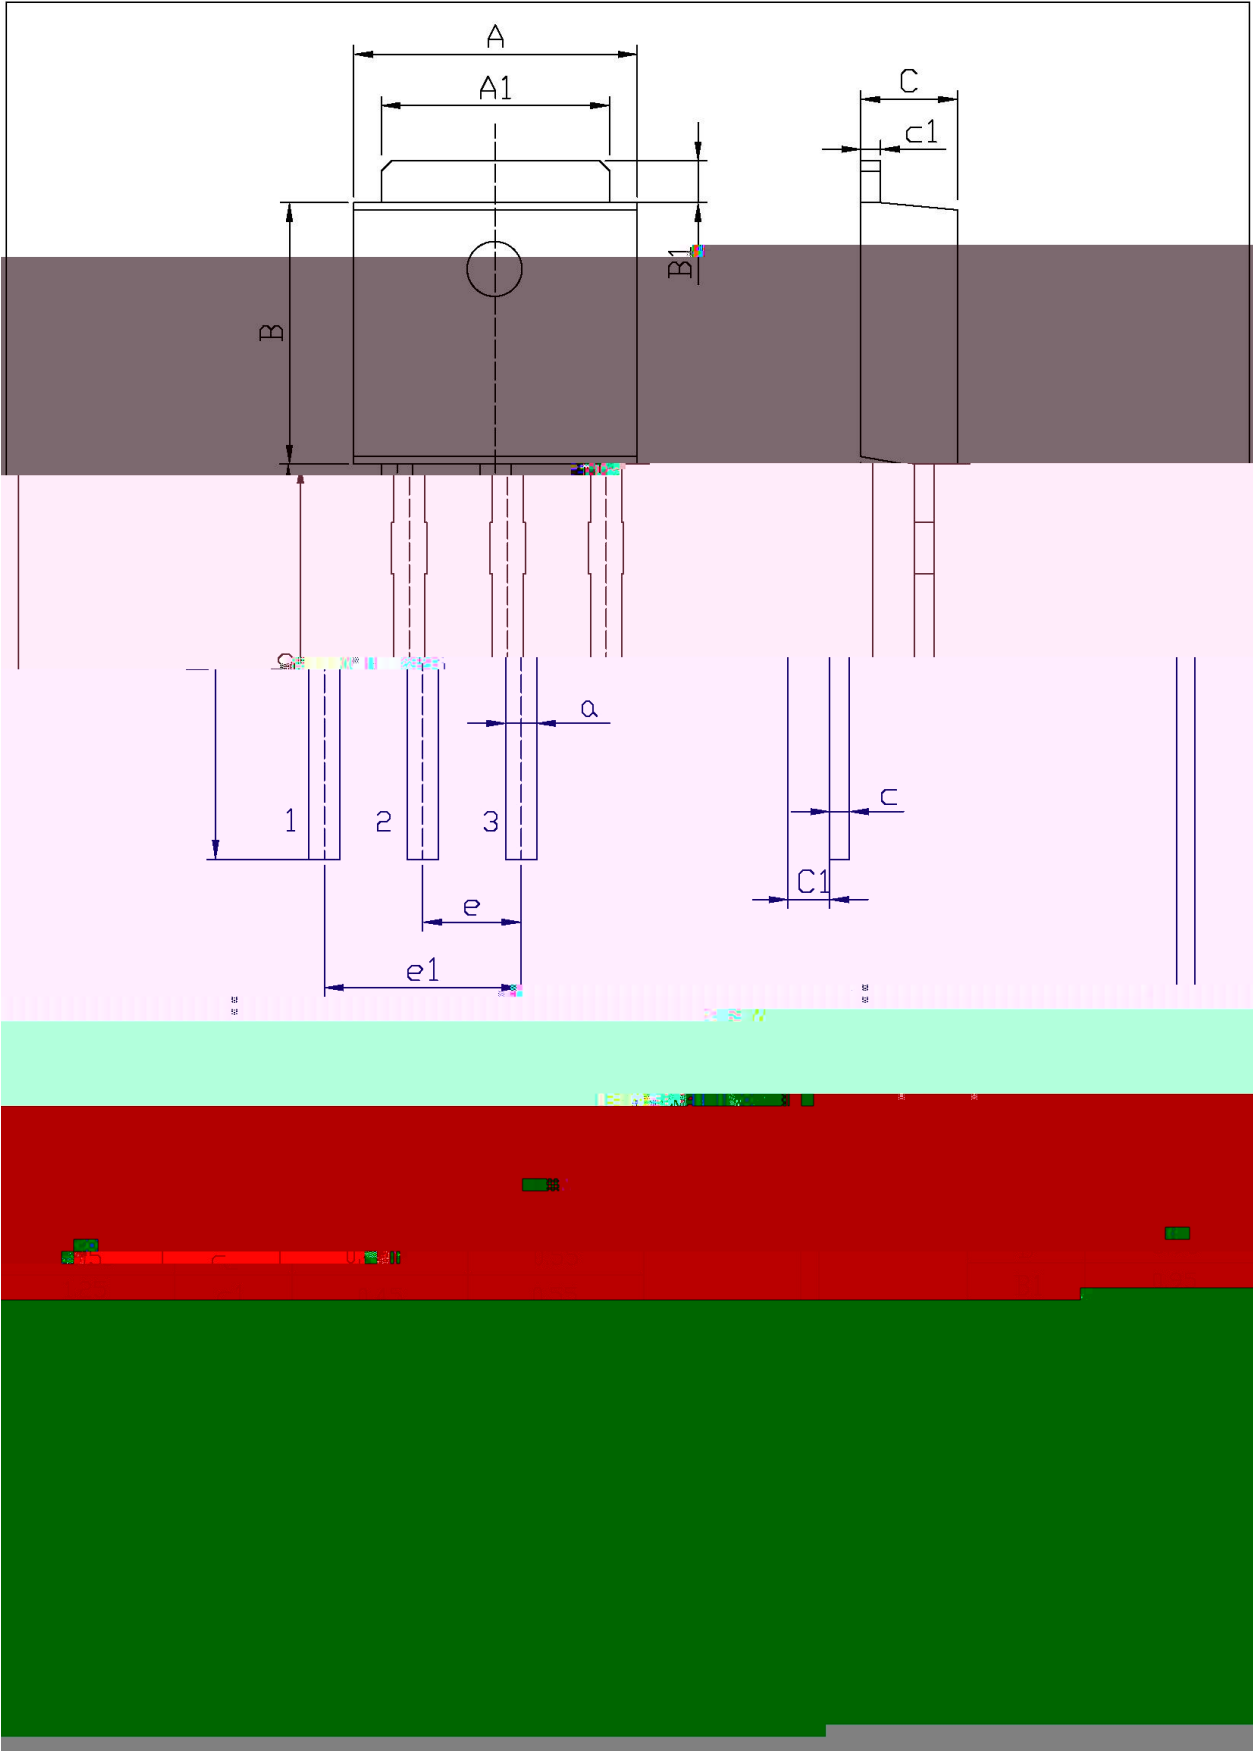

/ Marking Instructions

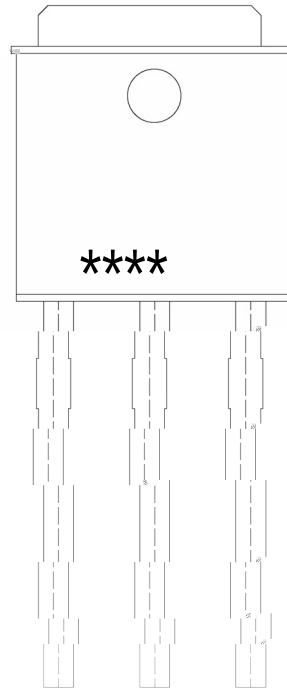

() / Temperature Profile for Dip Soldering(Pb-Free)

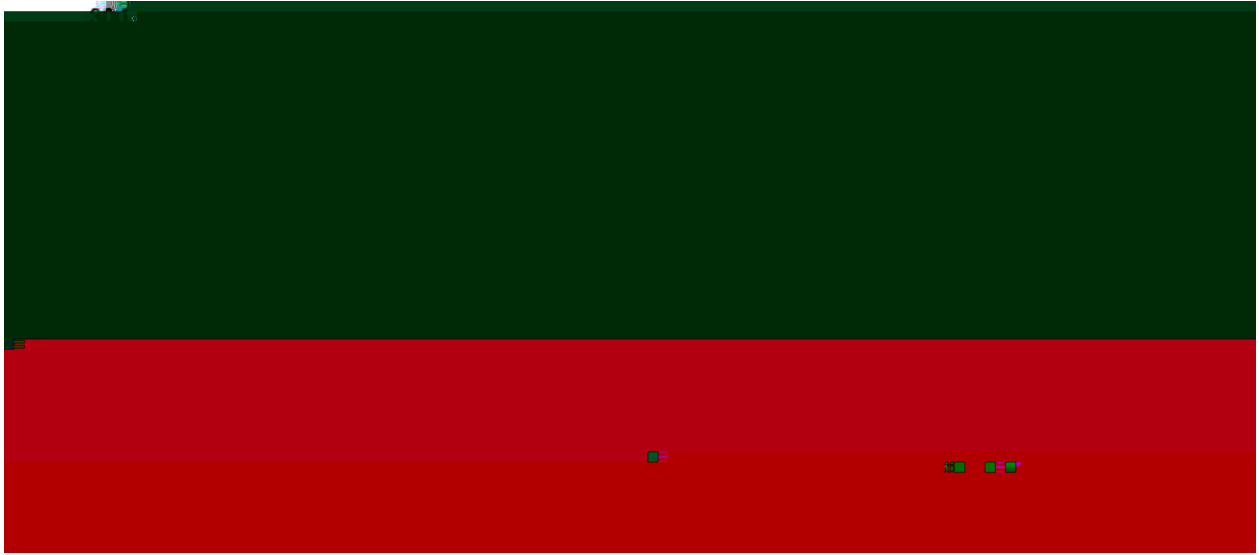 $\pm$ $\pm$ $\pm$ $\pm$