



/ Descriptions**/ Features****/ Applications****/ Equivalent Circuit****/ Pinning****/ h_{FE} Classifications & Marking**


/ Absolute Maximum Ratings(Ta=25)

			℃


/ Electrical Characteristics(Ta=25)

		μ				
						μ
						μ
						μ
		μ				
						Ω
		Ω				

/ Electrical Characteristic Curve

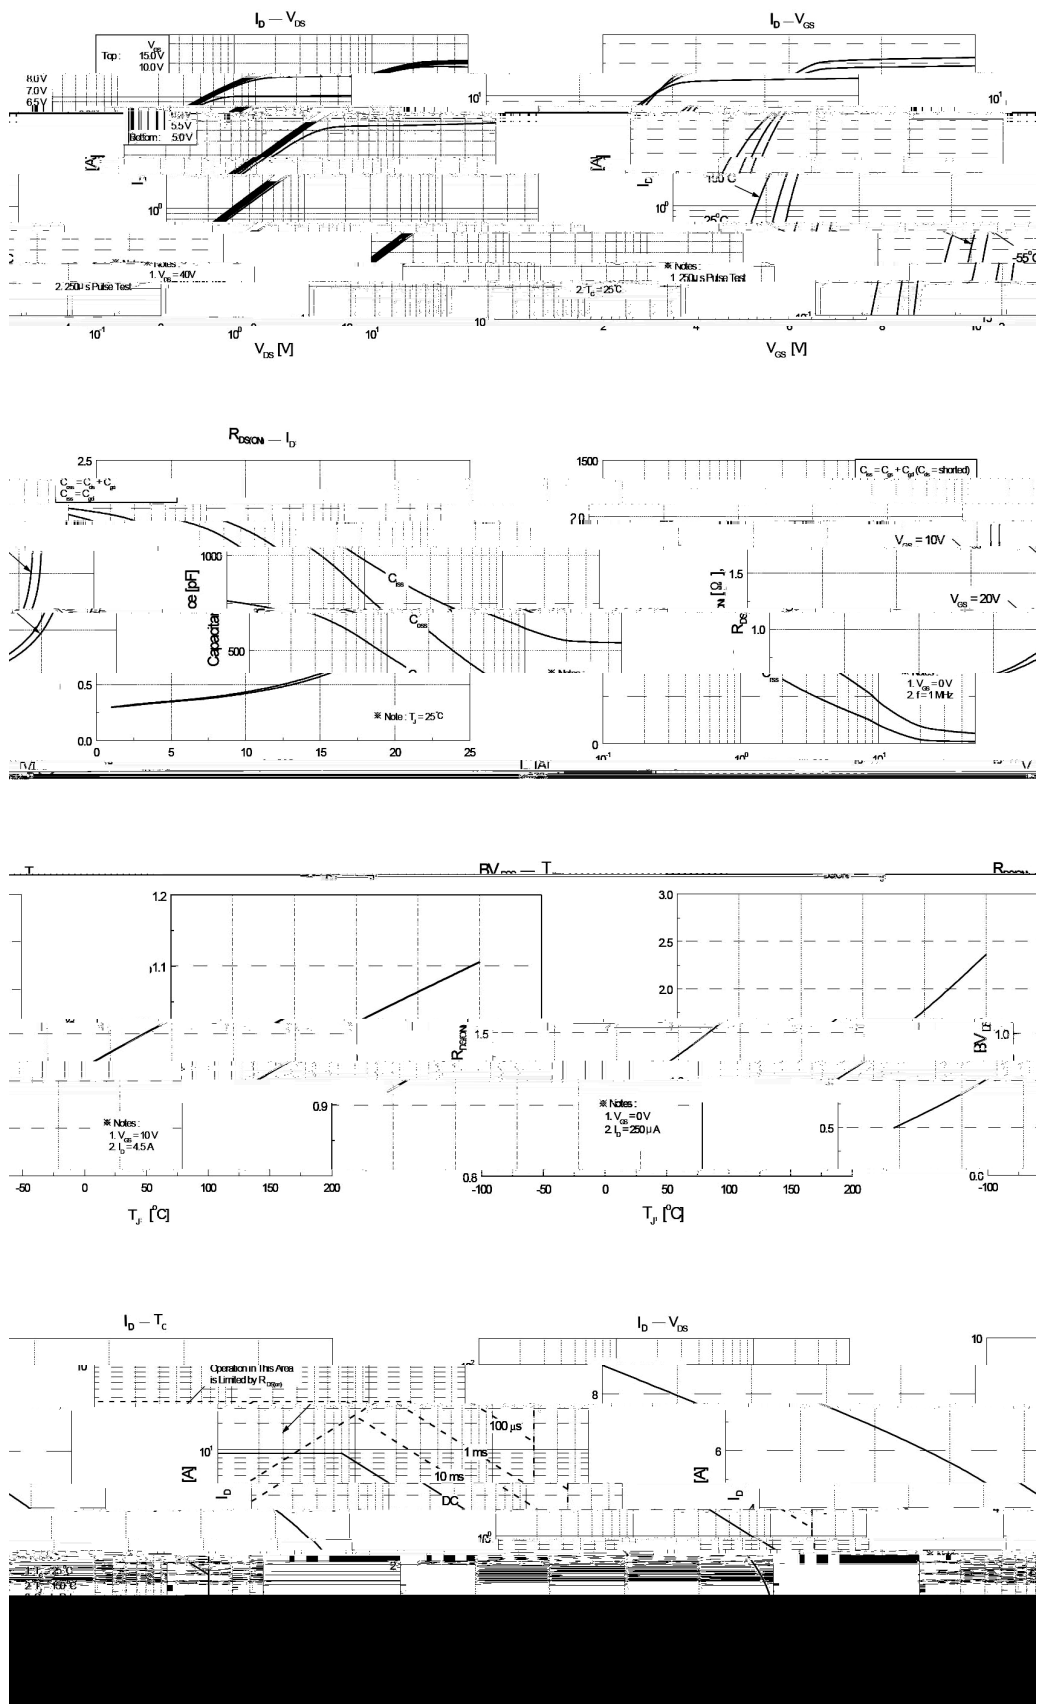


/ Package Dimensions

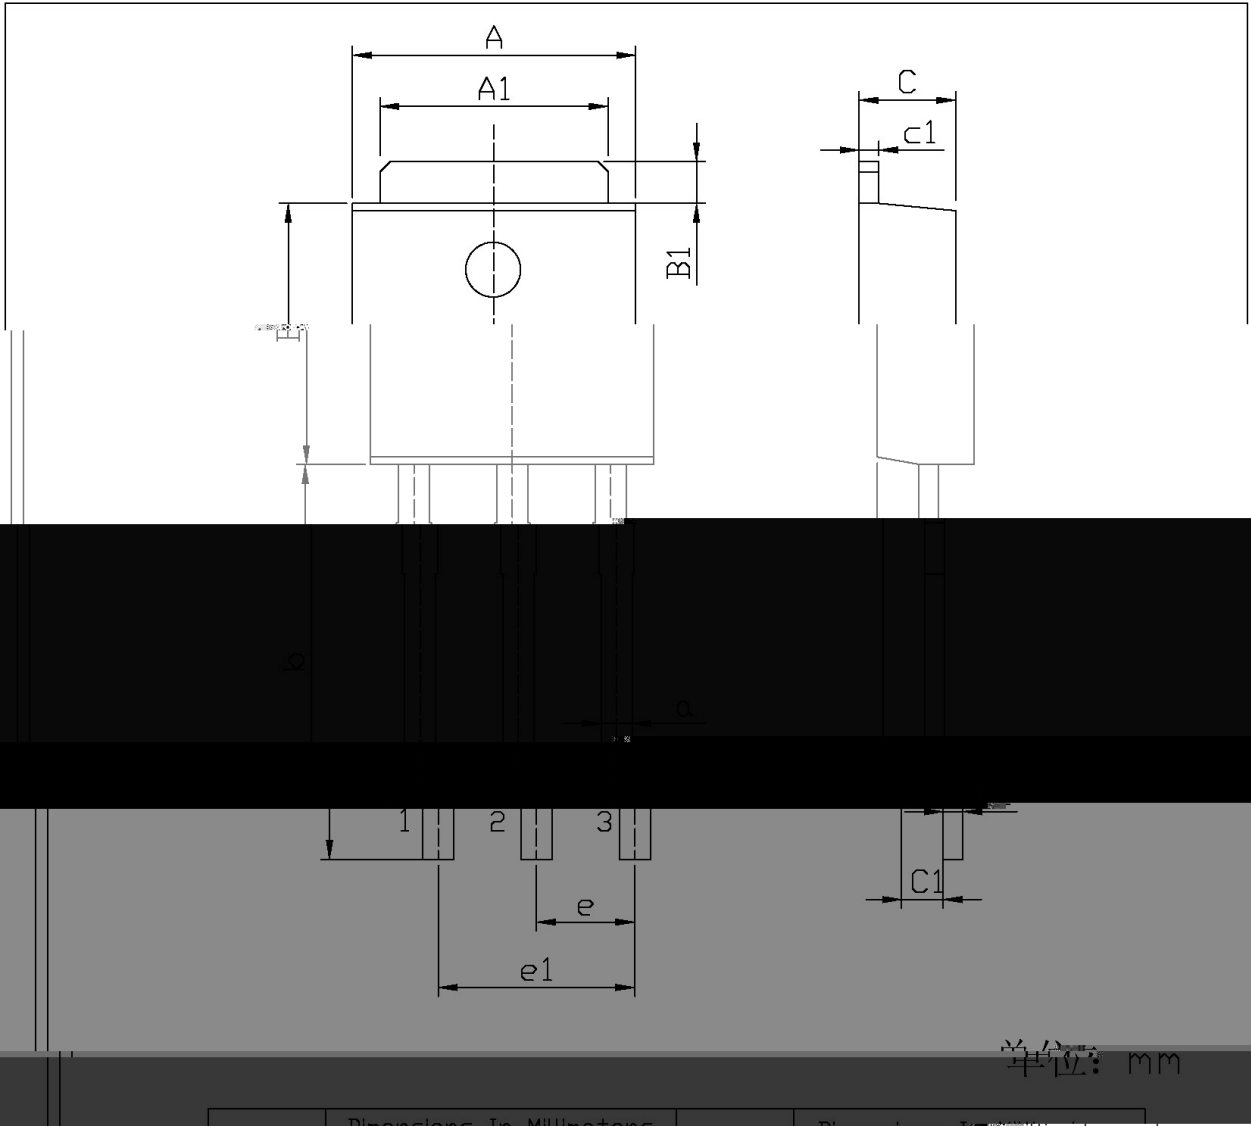


Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
A	6.45	6.75	a	0.50	0.70
A1	5.10	5.50	b	9.00	9.40
B	5.95	6.25	c	0.45	0.55
B1	0.95	1.25	c1	0.45	0.55
C	2.20	2.40	e	2.24	2.34
C1	0.95	1.15	e1	4.43	4.73

TU-251

/ Marking Instructions

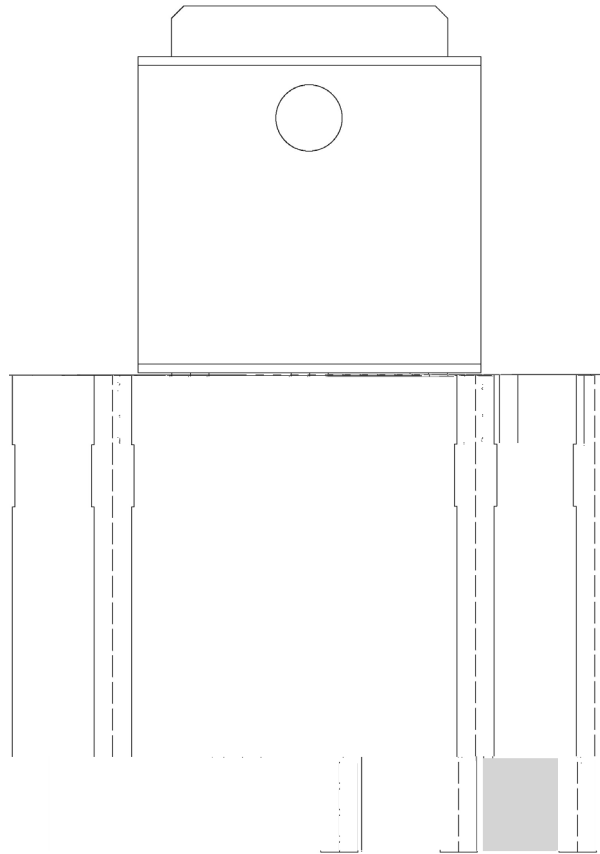

() / Temperature Profile for Dip Soldering(Pb-Free)

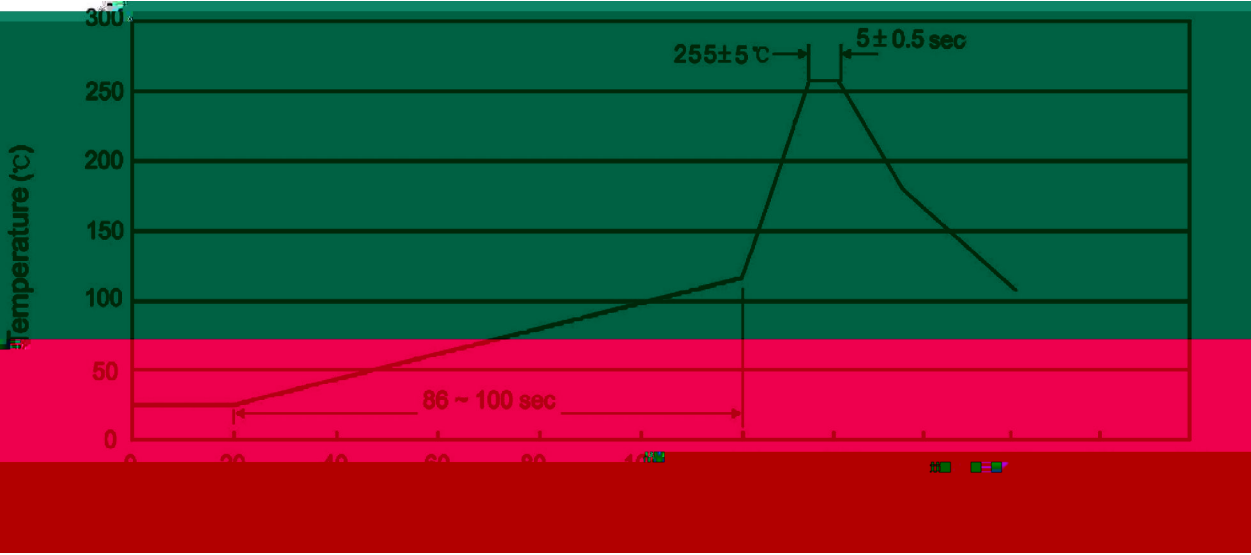

/ Resistance to Soldering Heat Test Conditions

℃

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	只 袋	袋 盒	只 盒	盒 箱	只 箱	袋	盒	箱

封装形式	包装数量					包装尺寸		
	只 套管	套管 盒	只 盒	盒 箱	只 箱	套管	盒	箱

/ Notices