

/ Descriptions

N

/ Features


≤

≤


/ Applications

DC-DC

/ Equivalent Circuit



/ Pinning

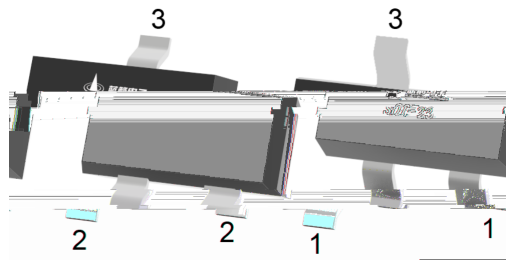

/ Marking




/ Absolute Maximum Ratings(Ta=25)

/ Electrical Characteristics(Ta=25)

/ Electrical Characteristics(Ta=25)

		A/μs				

/ Electrical Characteristic Curve

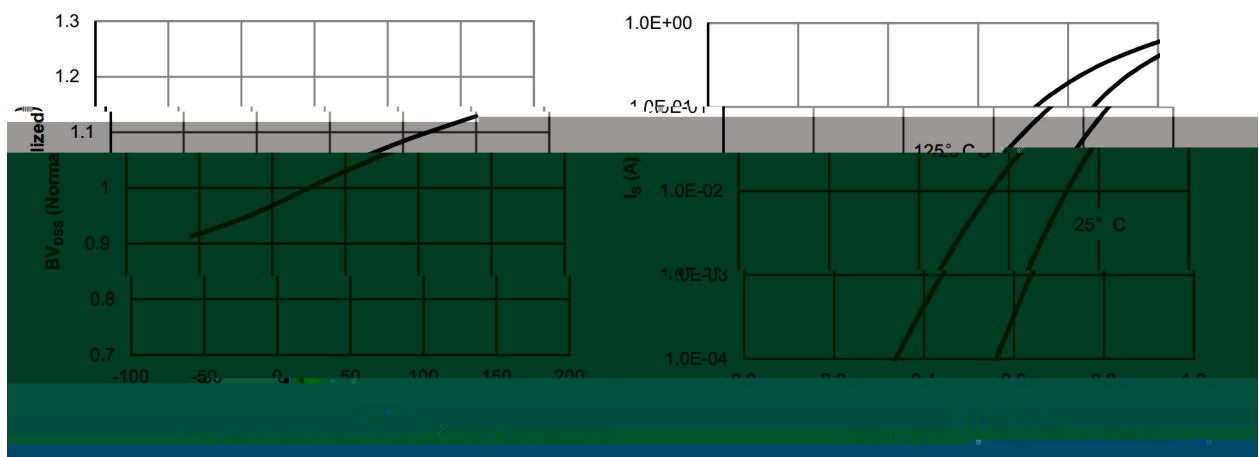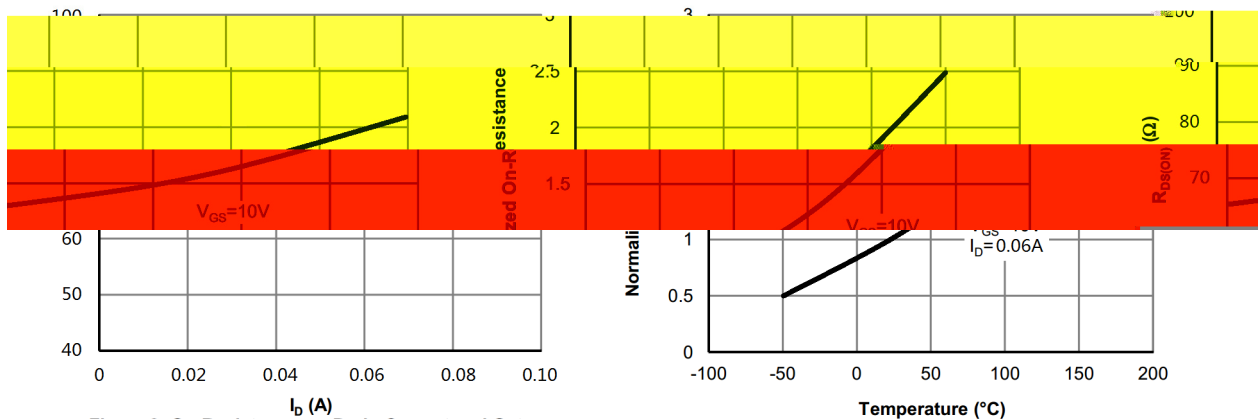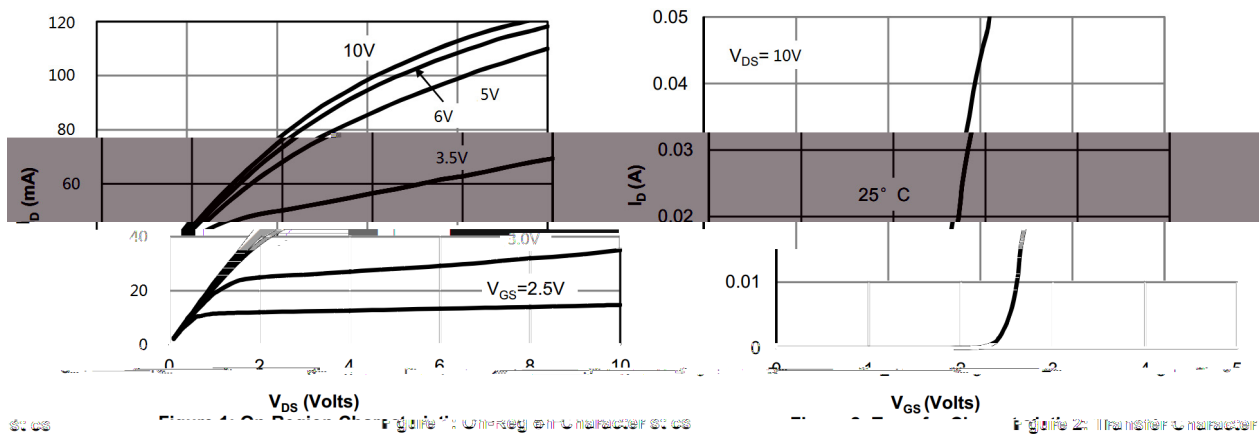

/ Electrical Characteristic Curve

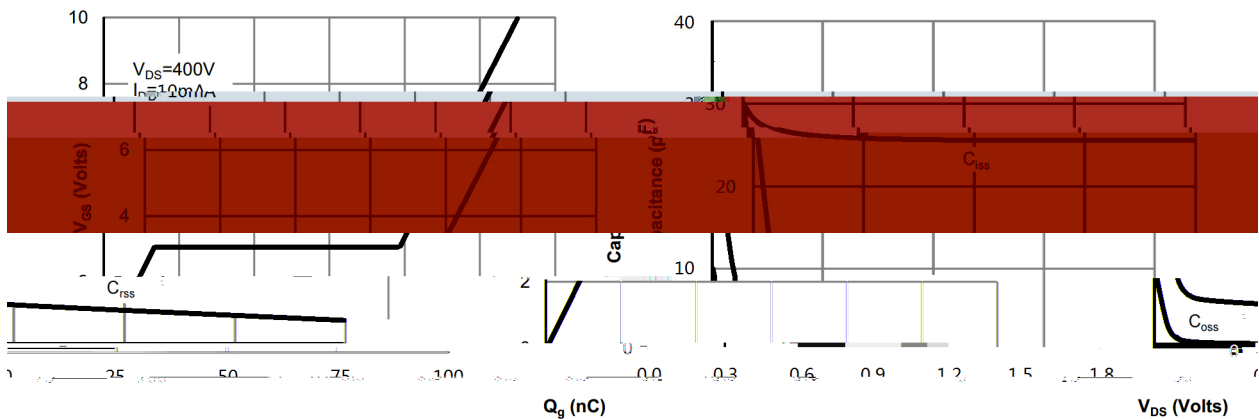


Figure 7: Gate Charge Characteristics Figure 8: Capacitance Characteristics

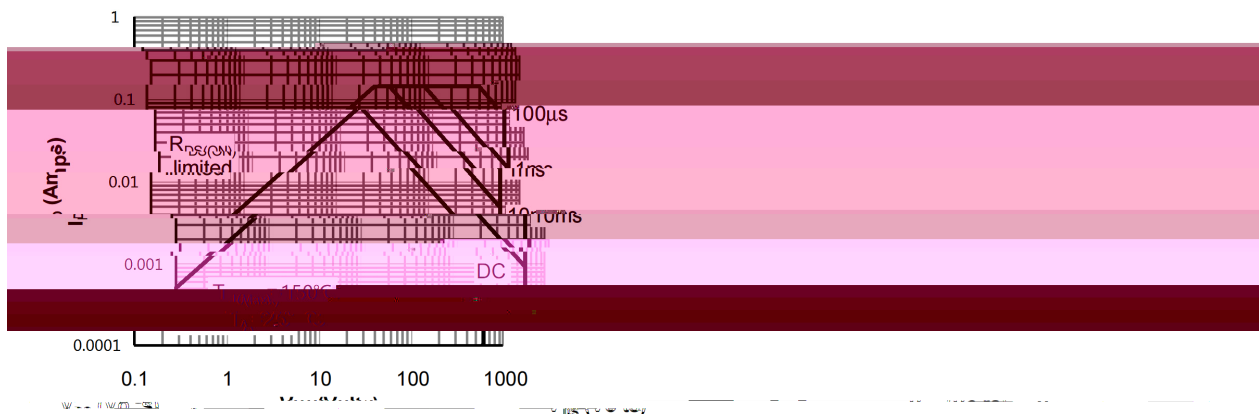


Figure 9: Maximum Forward Biased Safe

Operating Area


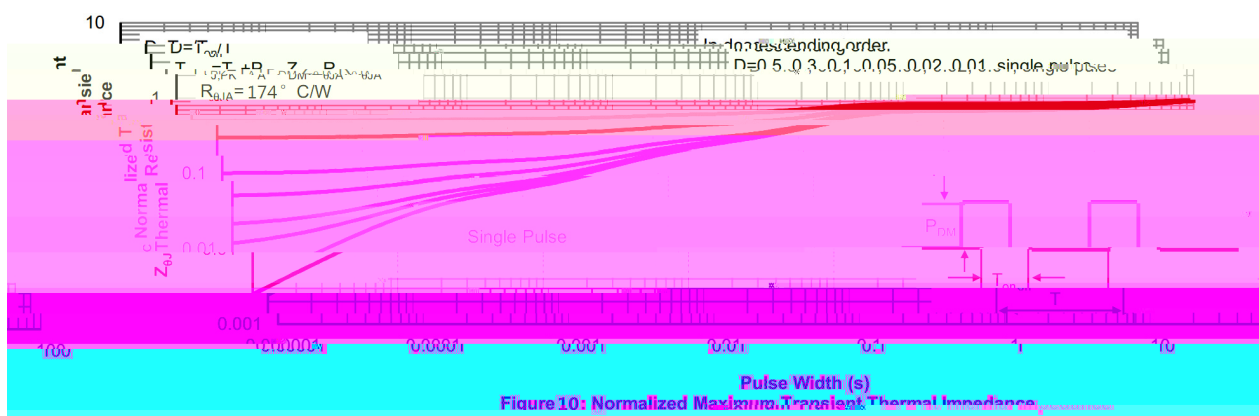


Figure 10: Normalized Maximum Transient Thermal Impedance


/ Package Dimensions

SOT-23

单位: mm

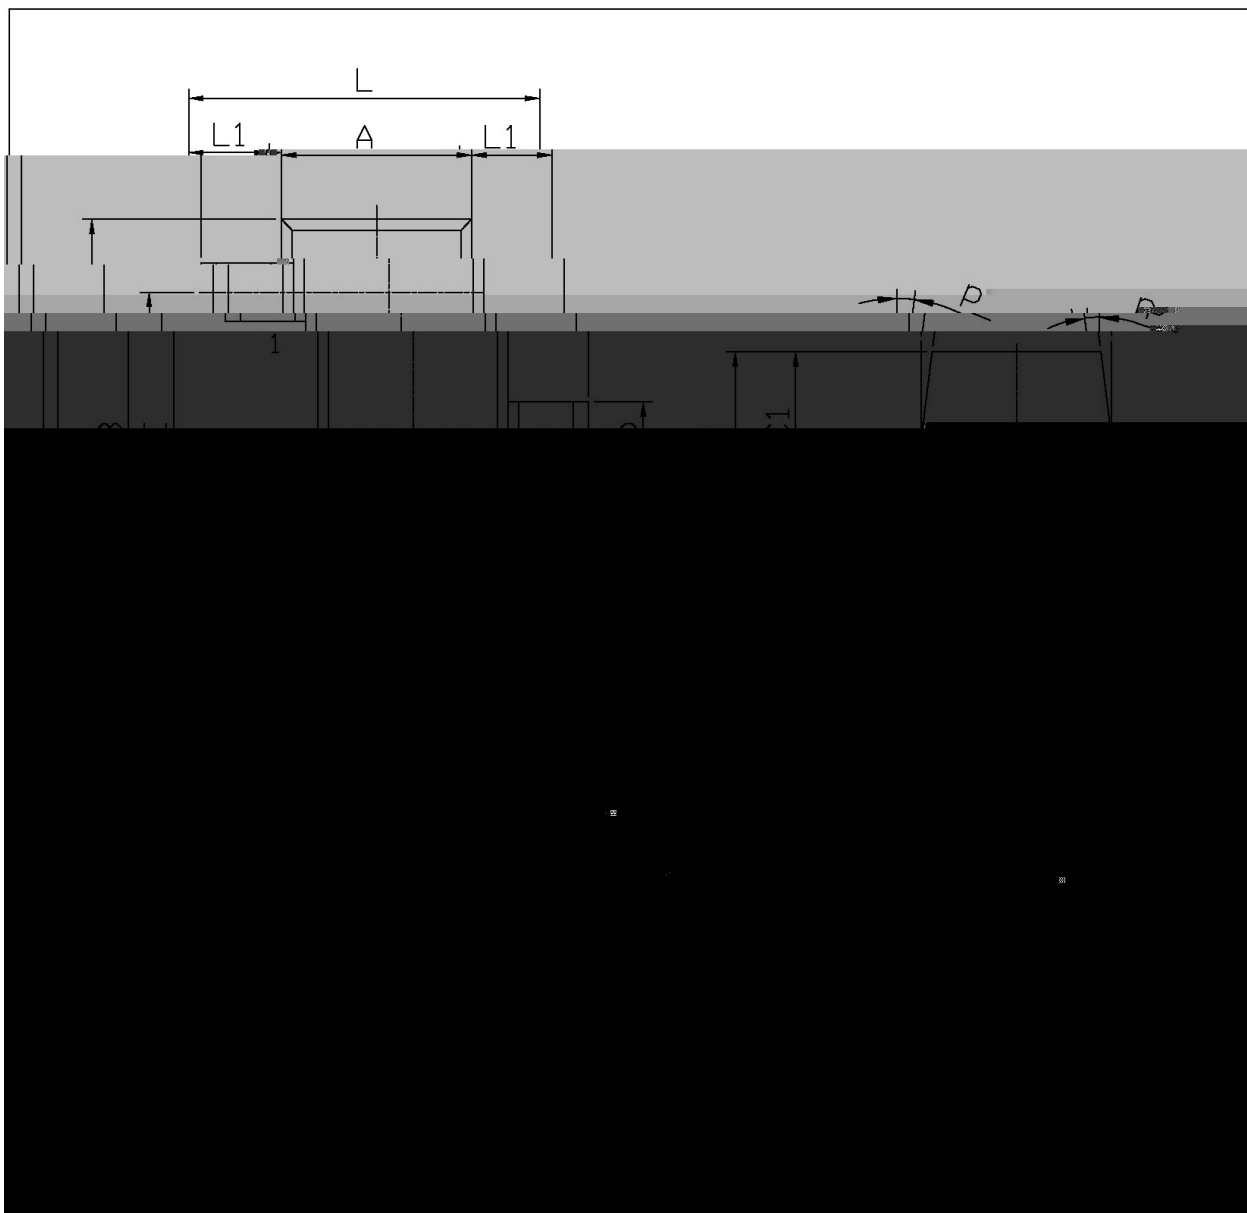

/ Marking Instructions

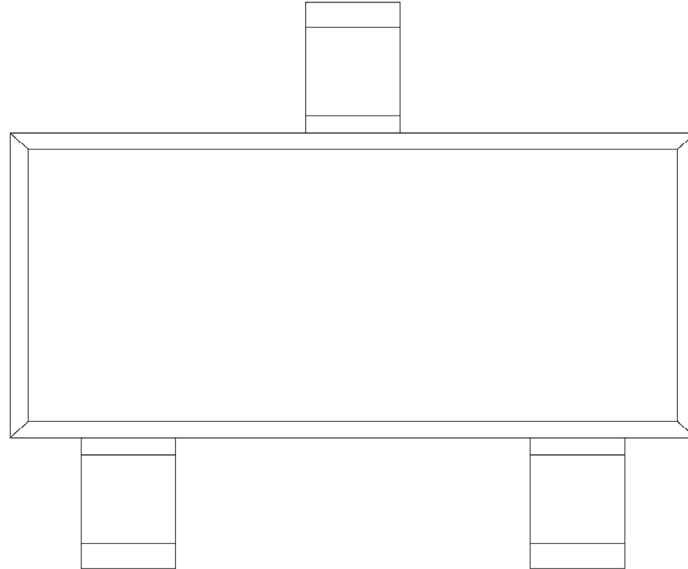

[illegible] $\pm$ $\pm$ $\pm$ $\pm$ $\pm$ $\pm$

/ Packaging SPEC.

	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box	IBM