

BRMUN5135WS

BRMUN5135WS

Rev.A Mar.-2024




DATA SHEET


Parameter	Symbol	Rating	Unit
Supply Voltage	V_{CC}	-50	V
Input Voltage	V_{IN}	-12	V
		+5	V
Output Current	I_O	-100	mA
Power Dissipation	P_d	187	mW
Junction Temperature	T_j	150	
Storage Temperature Range	T_{stg}	-55 150	

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Input Voltage	$V_{I(off)}$	$V_{CC}=-5.0V$ I_O				


/ Electrical Characteristic Curve(PNP)

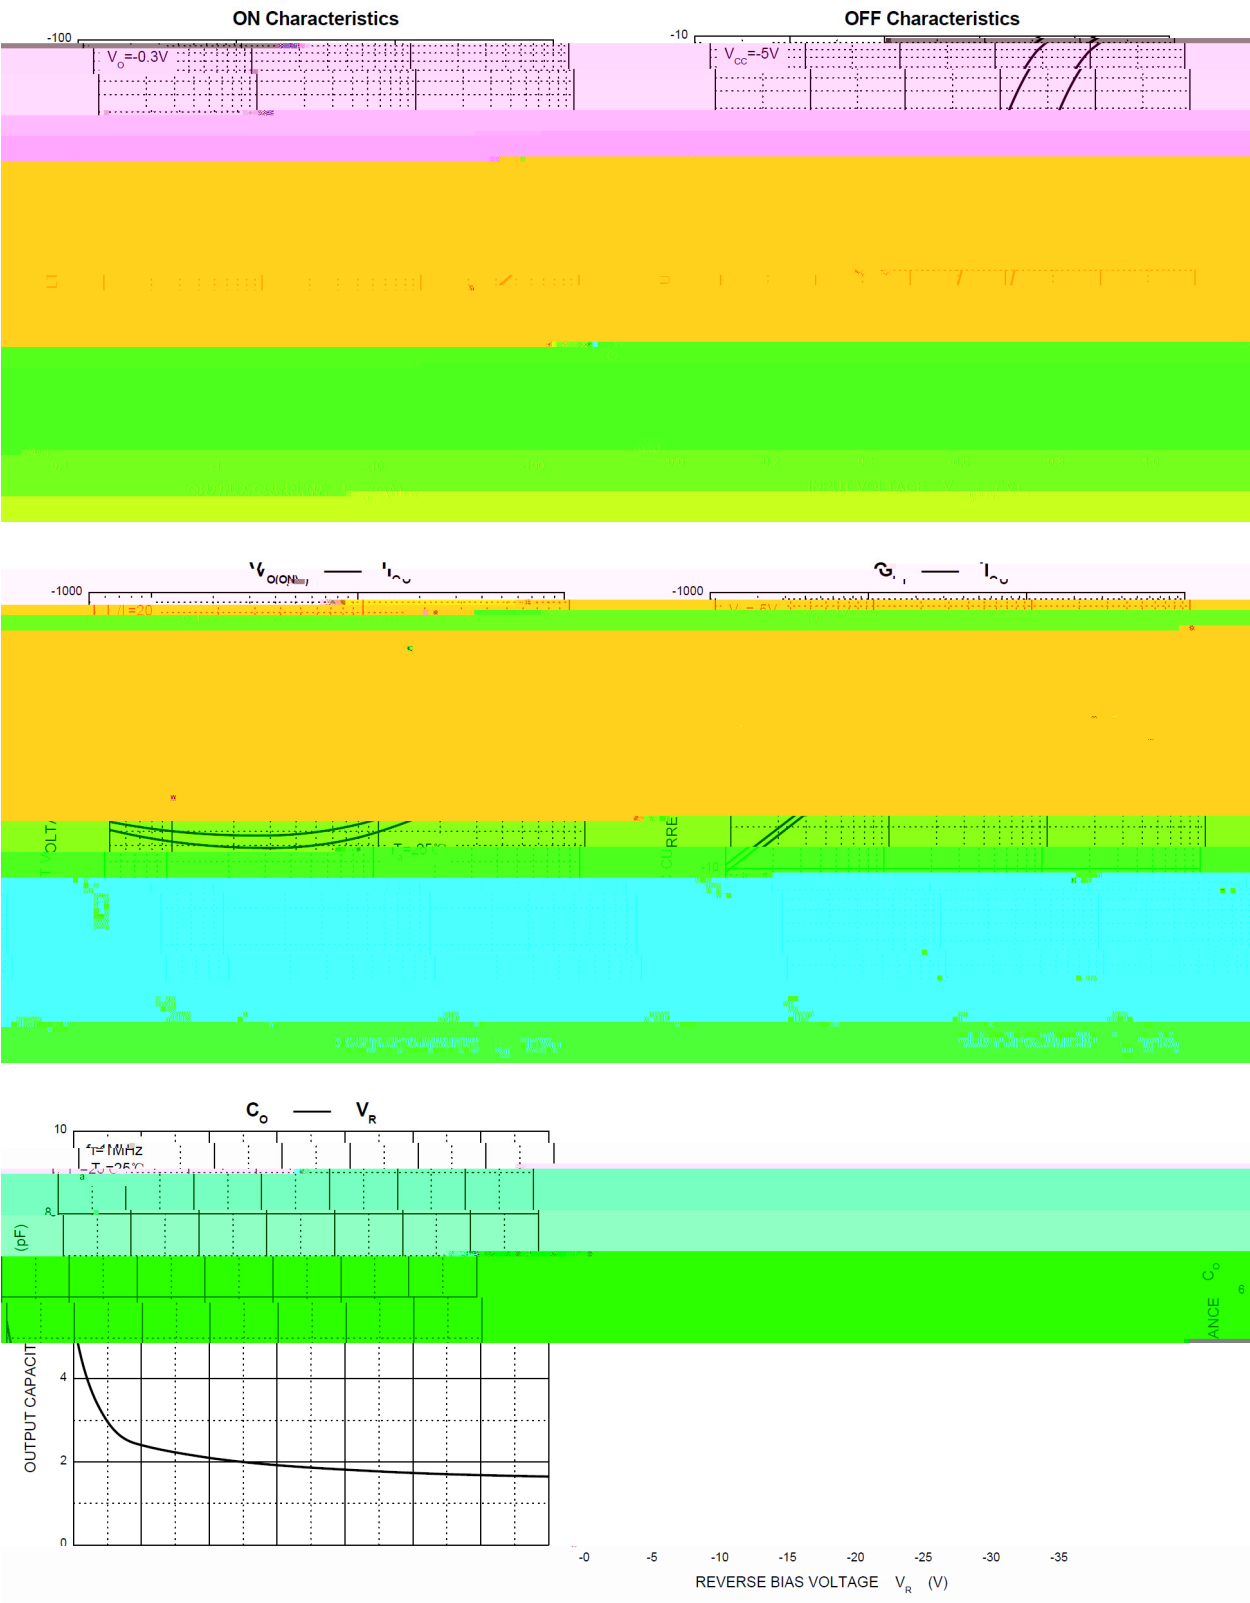

/ Package Dimensions

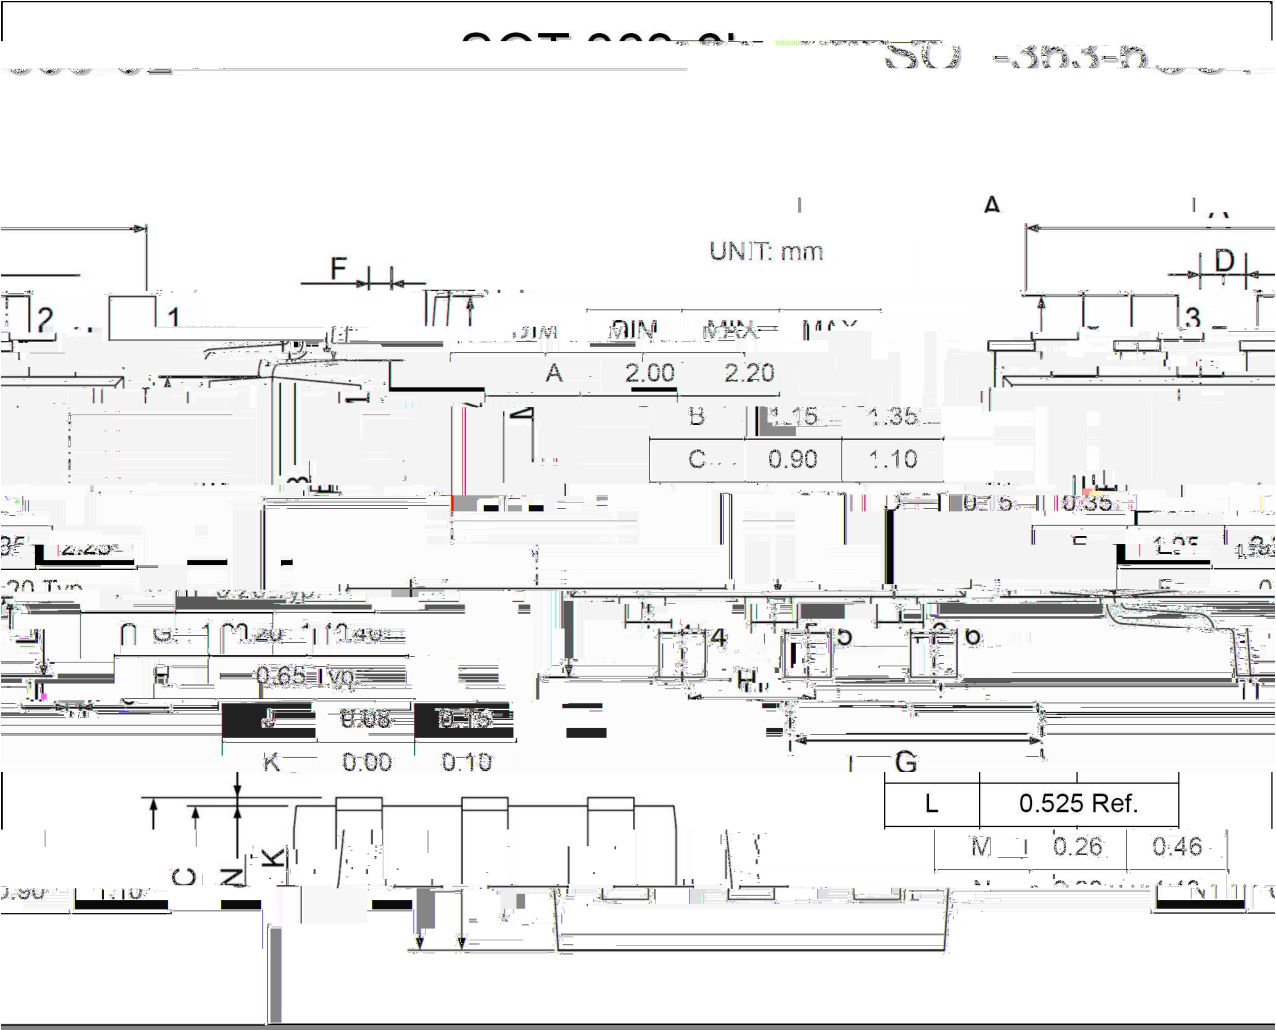


/ Marking Instructions

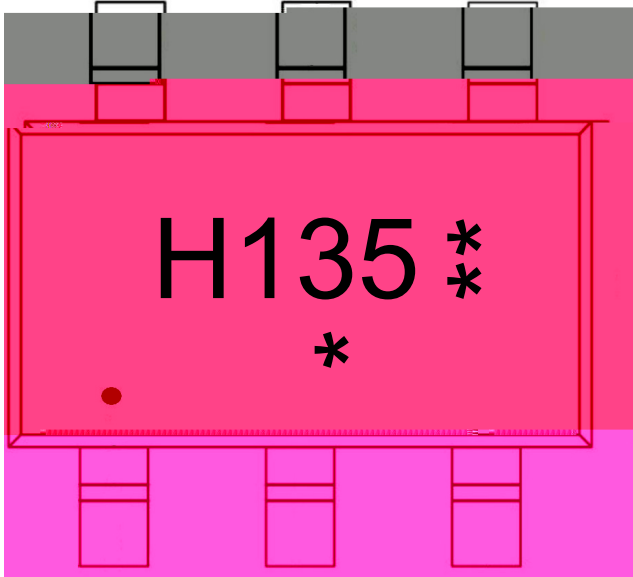

●	“ 1 ”
H	
135	
***:	
Note:	
●	“ 1 ” Pin
H	Company Code
135	Product Type Code
***:	Lot No. Code, code change with Lot No

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

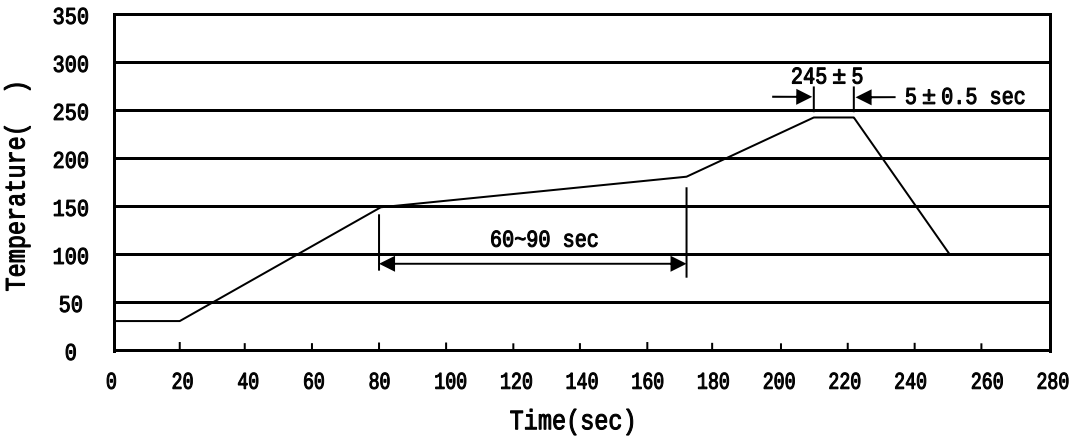

Note:

- 1

150 180

60 90sec;

1.Preheating:150~180 , Time:60~90sec.
- 2

245±5

5±0.5sec;

2.Peak Temp.:245±5 , Duration:5±0.5sec.
- 3

2 10 /sec.

3. Cooling Speed: 2~10 /sec.

/ Resistance to Soldering Heat Test Conditions

260±5 10±1 sec. Temp.:260±5 Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-363	3,000	10	30,000	6	180,000	7 ×8	180×120×180	390×385×205

/ Notices