


/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit




/ Pinning

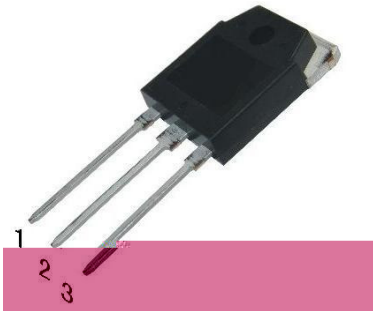


/ h_{FE} Classifications & Marking

/ Electrical Characteristic Curve

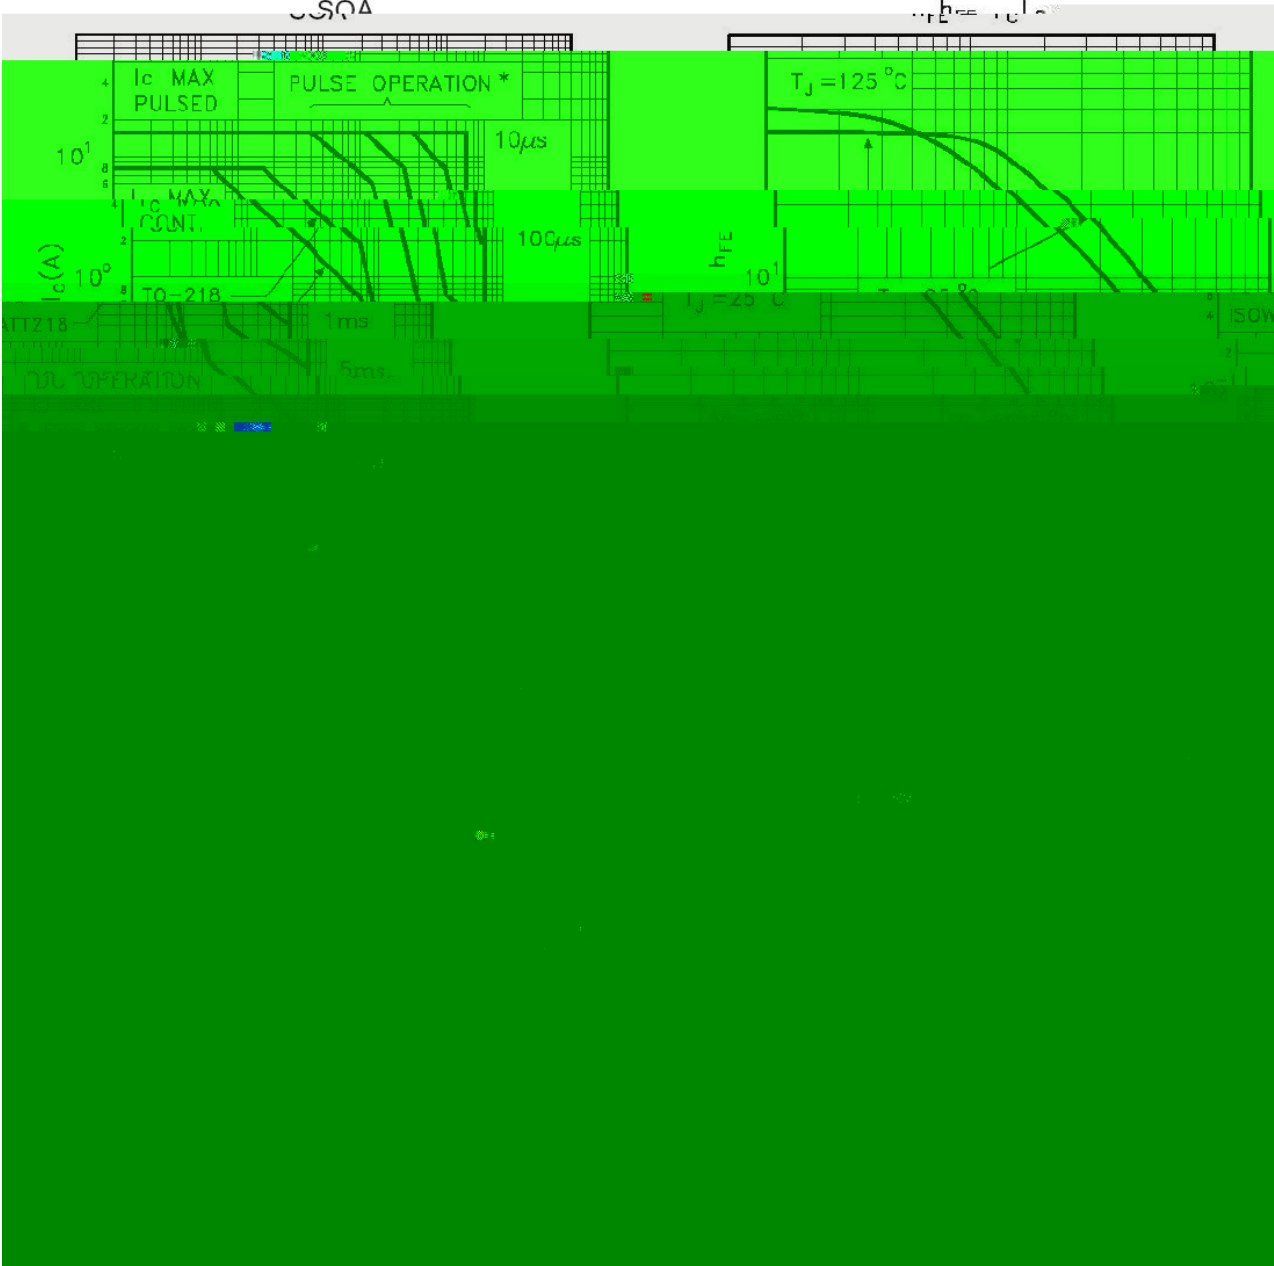


/ Package Dimensions

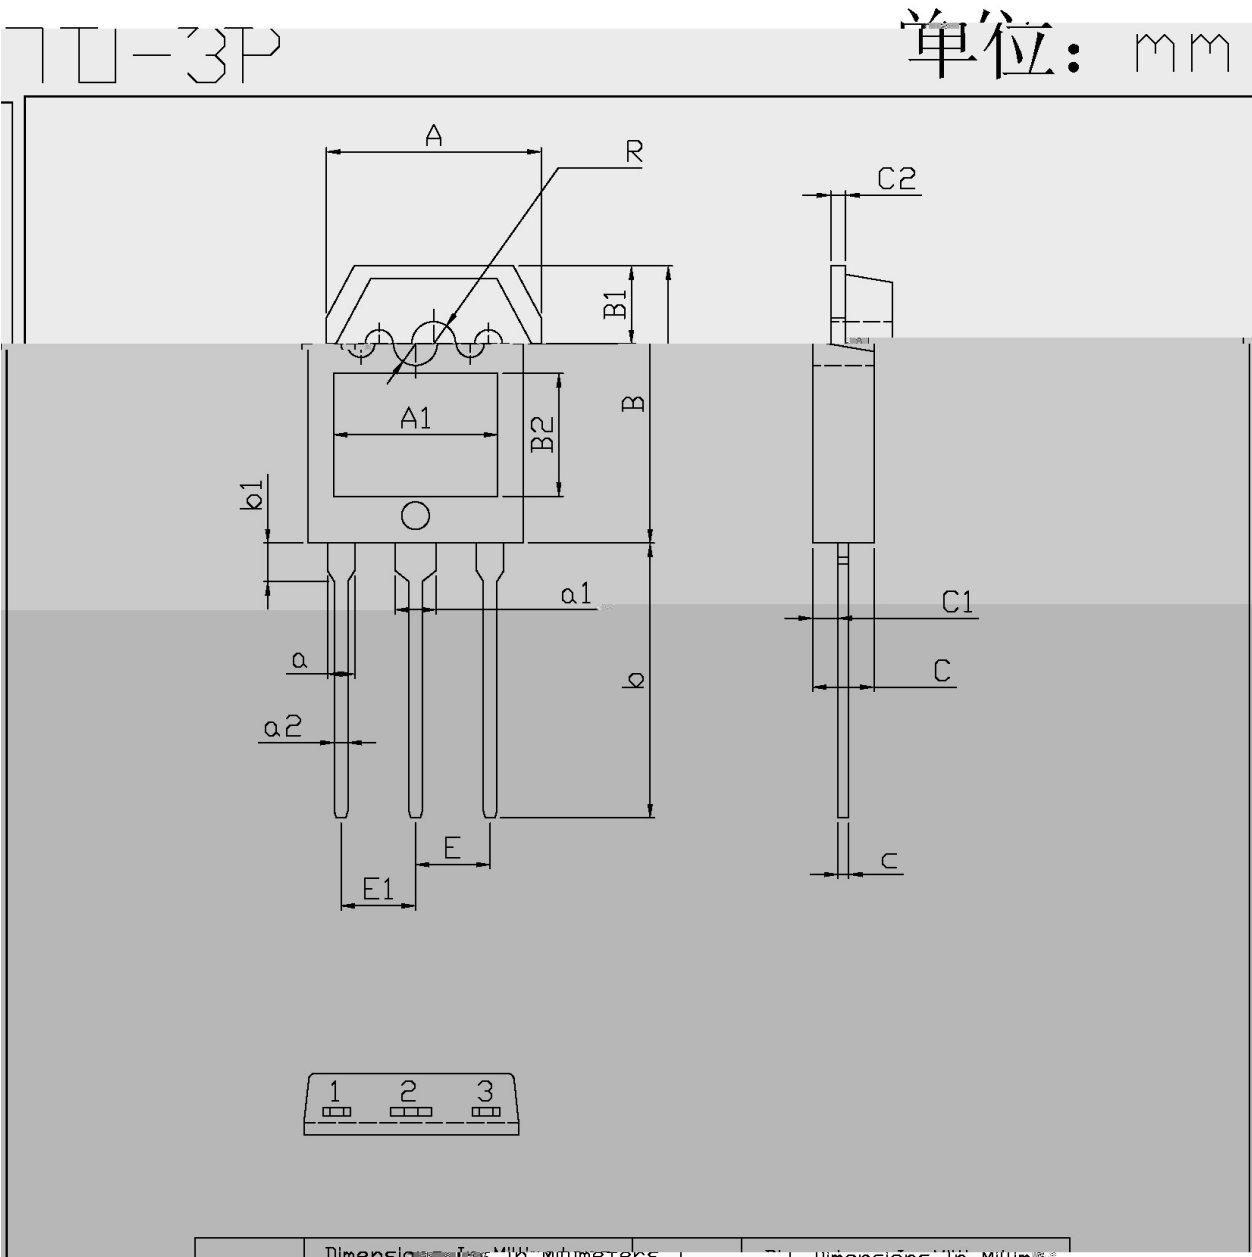


Dimension	Min	Max	Dimension	Min	Max
A	15.4	16.0	a2	0.8	1.2
R	3.1	3.5	E	5.45	
B	19.8	20.8	E1	5.45	
B1	5.5	5.9	C	4.3	4.7
B2	9.0		C1	1.2	1.6
A1	12.0		C2	1.4	1.6
b	19.0	20.0	C	0.5	0.7
b1	3.0	3.4			
a	1.0	2.2			
a1	2.8	3.2			

/ Marking Instructions

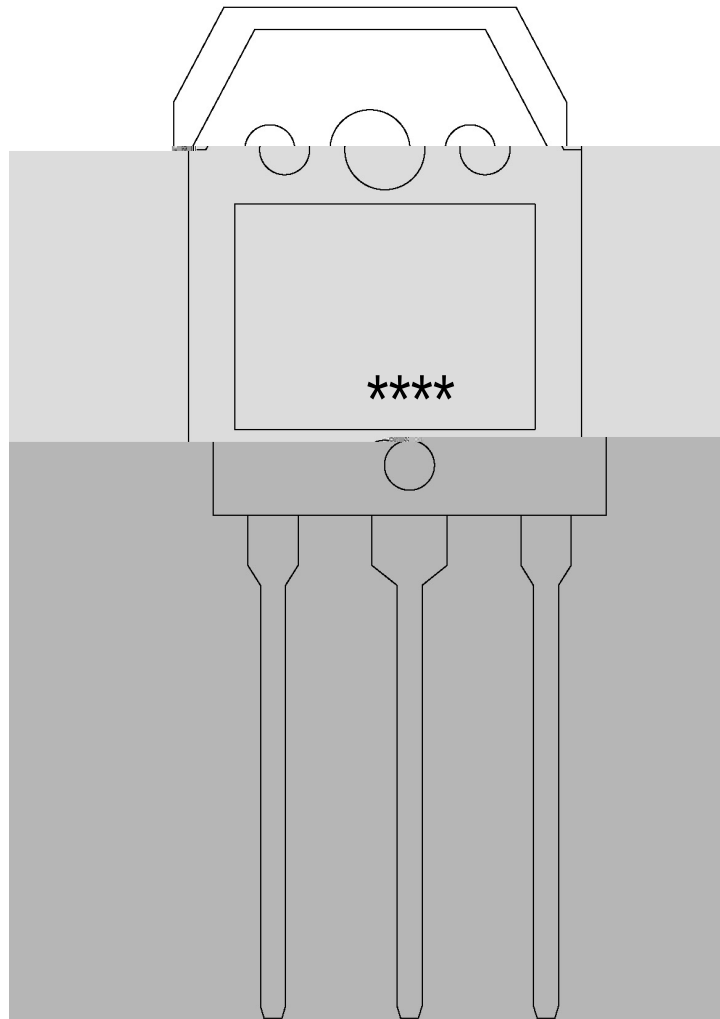

() / Temperature Profile for Dip Soldering(Pb-Free)

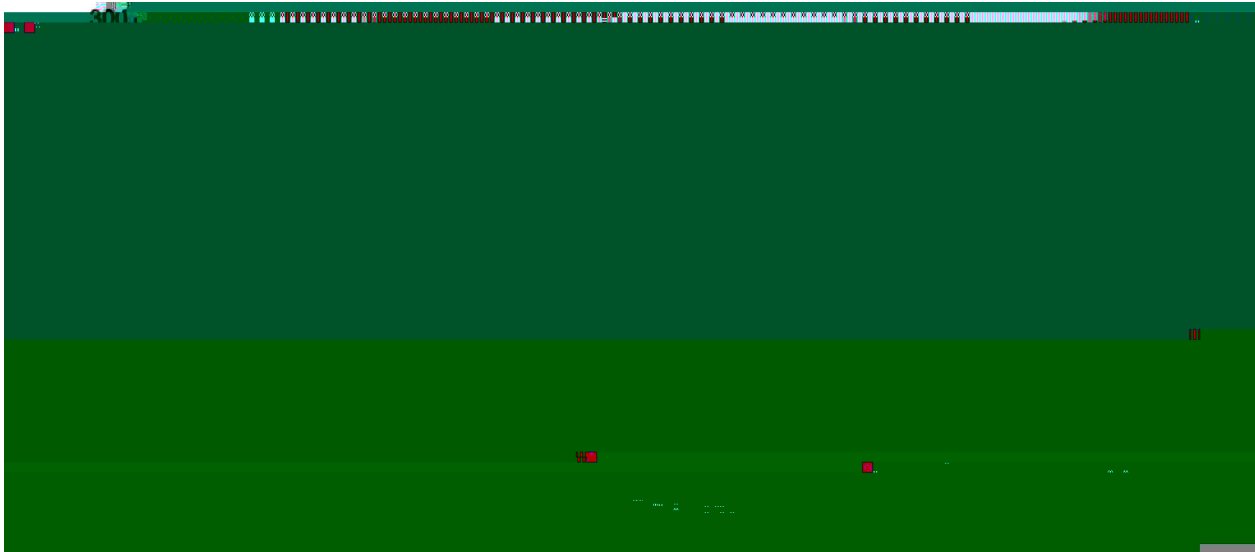

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	Units/Tube 只/套管	Tubes/Inner Box 套管/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Tube 套管	Inner Box 盒	Outer Box 箱
TO-3P	30	15	450	5	2250	497.5×46×8	555×164×50	575×290×180

/ Notices