

/ Descriptions


/ Features

200mW


/ Applications

2.4V-39V

/ Equivalent Circuit



/ Pinning

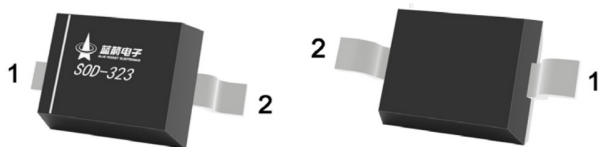

/ Marking

	θ		

[illegible]


BZT52BXXS




蓝箭电子
BLUE ROCKET ELECTRONICS

DATA SHEET

/ Electrical Characteristic Curve

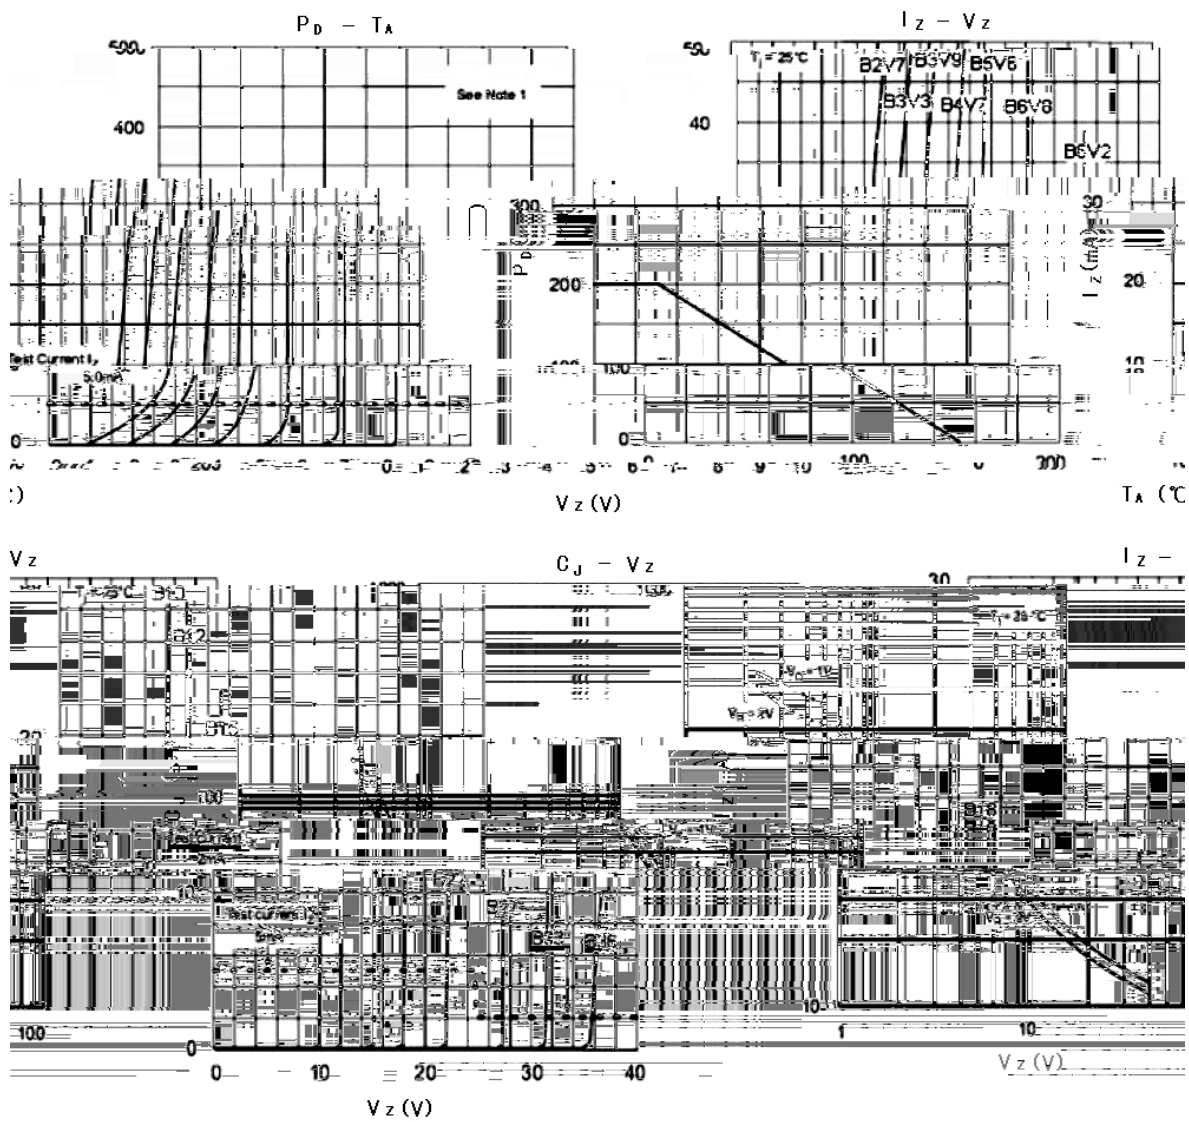


/ Package Dimensions

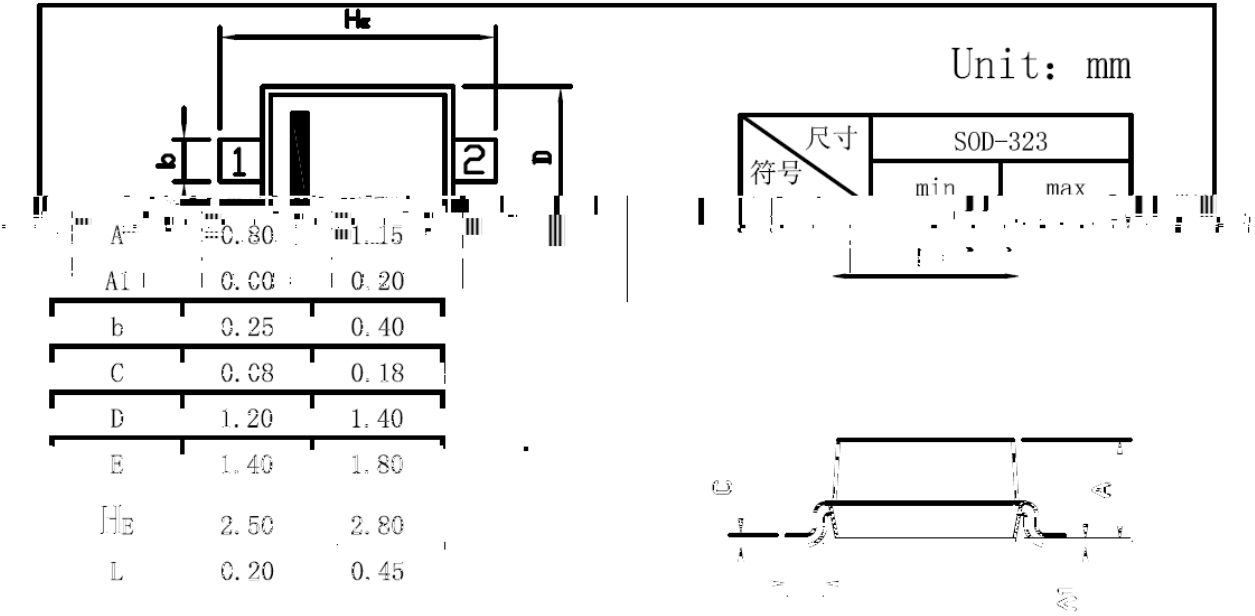

PIN 1 CATHODE PIN 2 ANODE


SOD-323

/ Marking Instructions

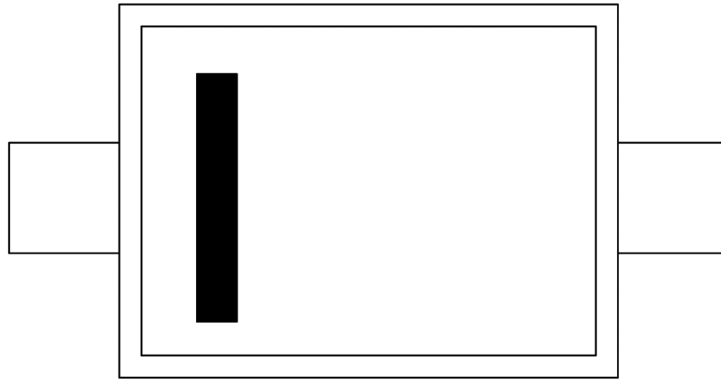

H
0Z

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

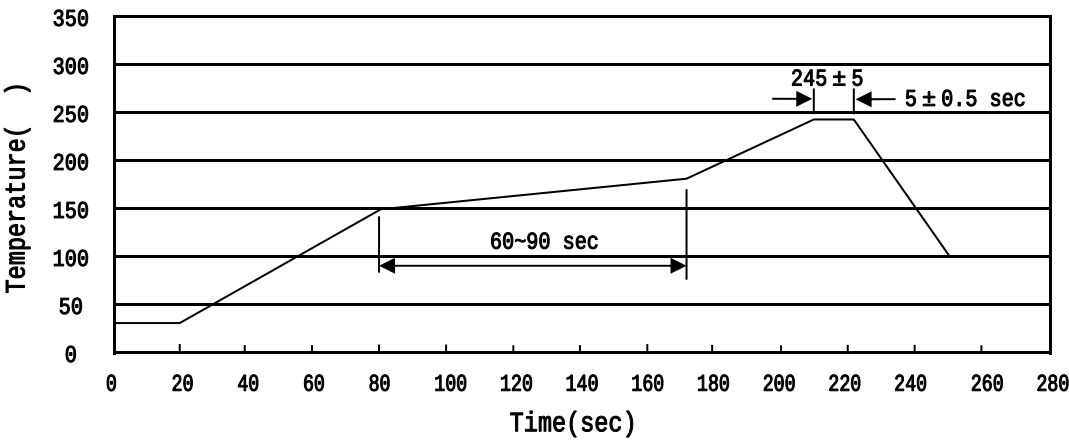

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box

/ Notices