


DTC143EUA

VRW0656 M M QSQ ʹQ È s ll ʹ

ʹ ð ʹ ð i v p i i° N f T ʹ ll y i ñ f β

ꢀꢀ ÆH ʹ ð Q 3 U ð A
Vzlwfkqlj dssolfdwlrqv/ lqwhuidfh flufxlw dqg gulyhu flufxlw dssolfdwlrqv

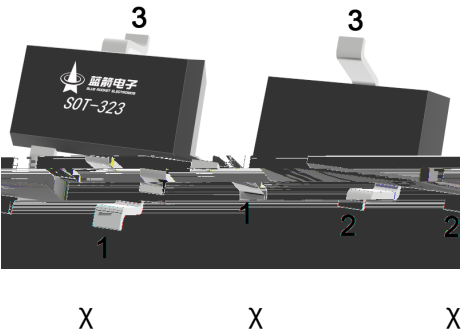

/ hFE Classifications & Marking

--	--


/ Absolute Maximum Ratings(Ta=25)

V_{DS}	I_D	V_{GS}	D_H

/ Electrical Characteristics(Ta=25)

V_{DS}	I_D	f_{sw}	η	ξ	ω_z	D_H
						μ
						Ω


/ Electrical Characteristic Curve

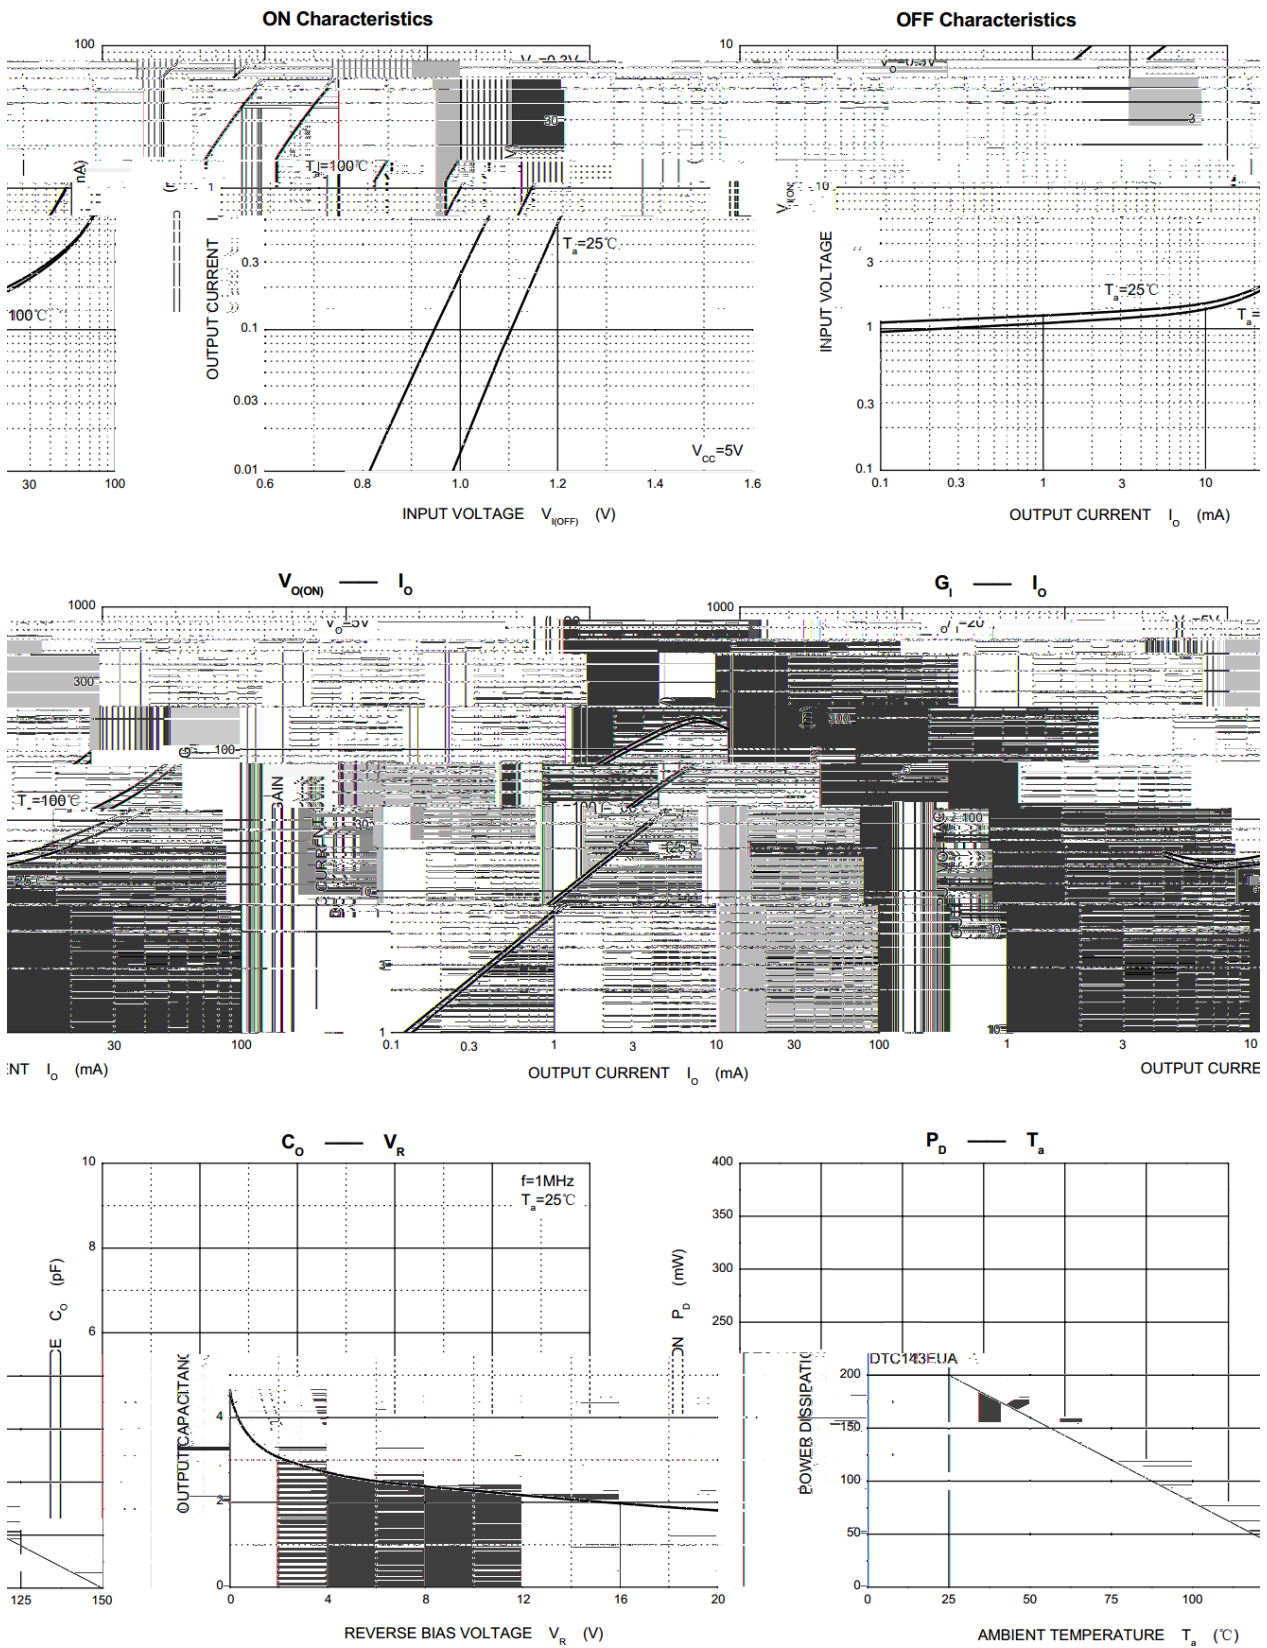


/ Package Dimensions

SOT-323

单位: mm

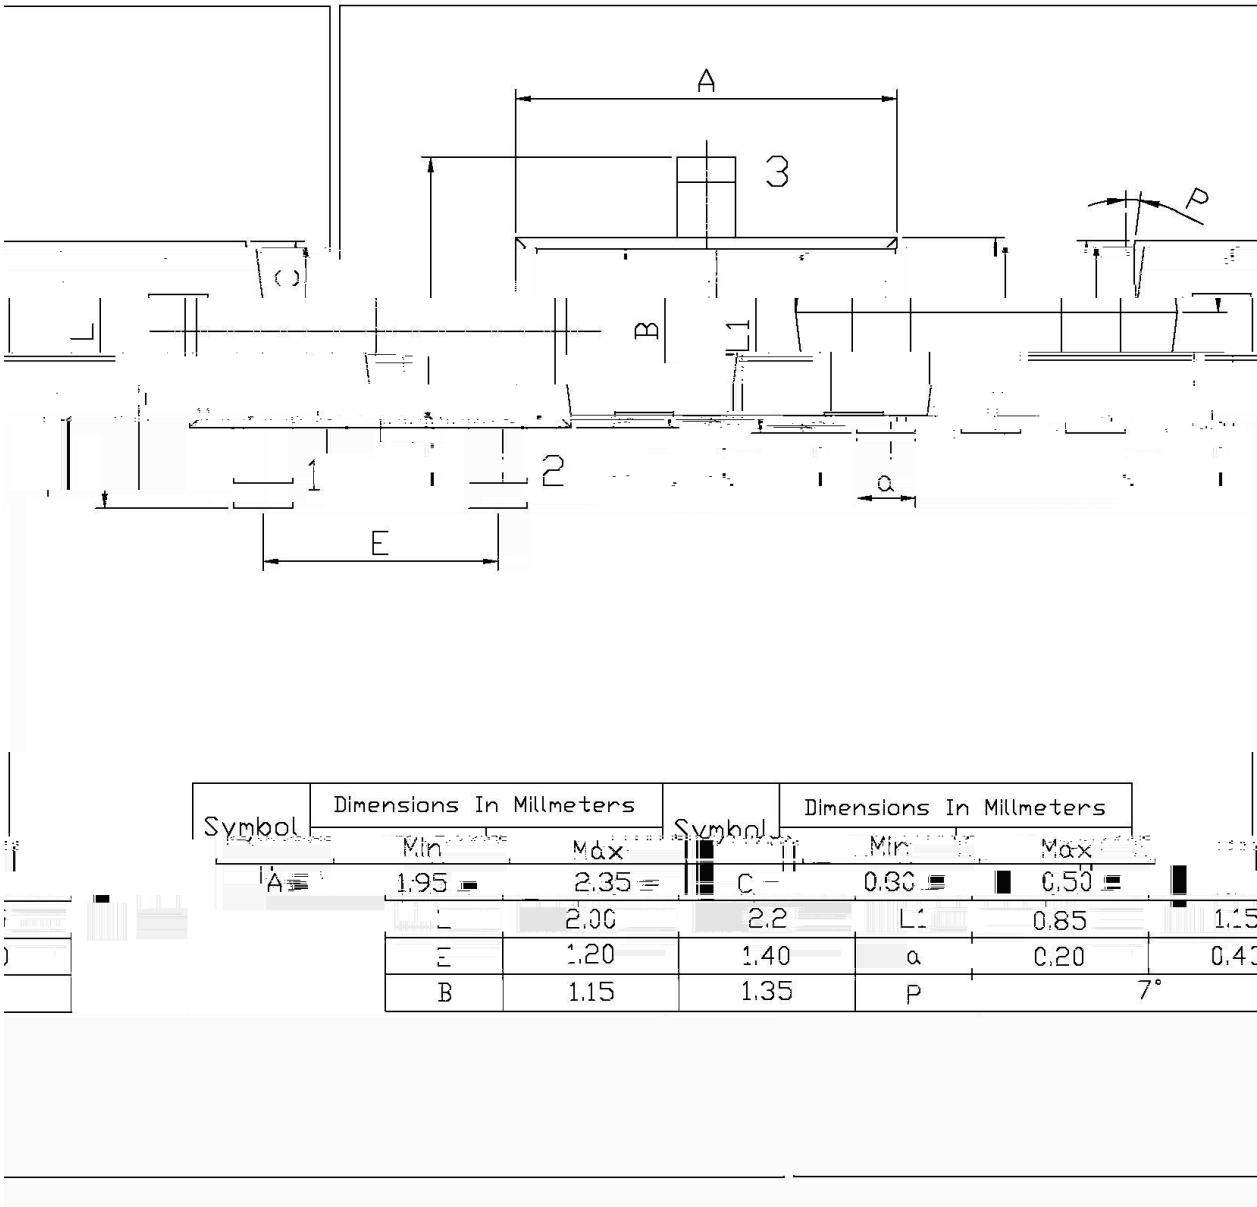


/ Marking Instructions

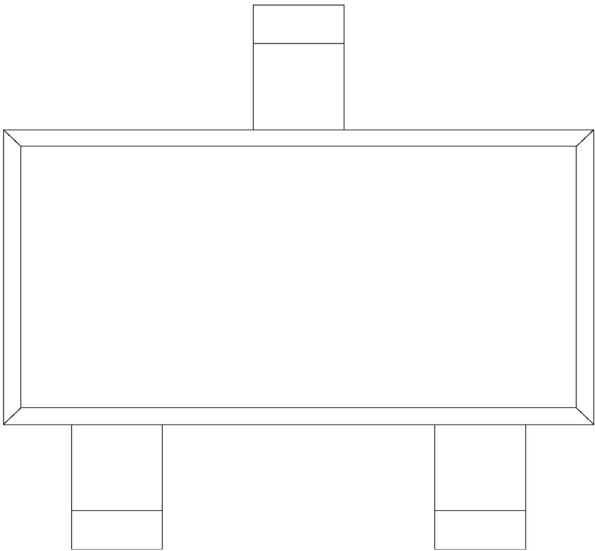

” X
K X 3 1 7
X 3 1 7

K X
X

() /

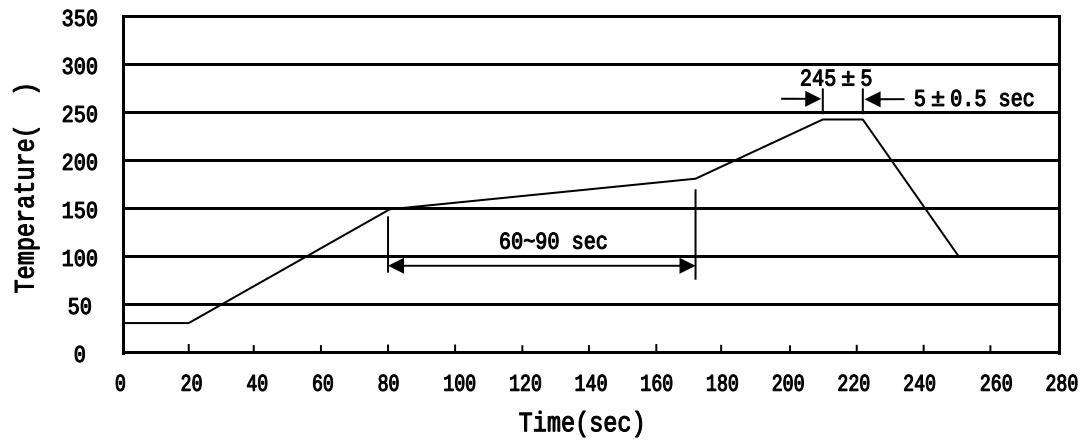

"X

$$\begin{array}{ccccccc} \mathfrak{P} \square \mathfrak{Y} & \mathfrak{K} & \mathfrak{t} & \mathfrak{i} & \mathfrak{H} & \mathfrak{K} & \mathfrak{t} \\ \mathfrak{S} \mathfrak{O} \square \mathfrak{Y} & \circ & \mathfrak{t} & \mathfrak{i} & \mathfrak{H} & \mathfrak{Y} \mathfrak{H} \mathfrak{K} & \circ & \mathfrak{t} & \circ \\ \mathfrak{i} & \mathfrak{Y} & \mathfrak{o} & \mathfrak{Y} \mathfrak{K} & \mathfrak{K} & \mathfrak{t} & & \mathfrak{t} \end{array}$$

/ Resistance to Soldering Heat Test Conditions

$$\square \overset{\circ}{y} \chi \quad \circ \quad \dagger \quad \text{'H} \quad \chi \quad \circ$$

/ Packaging SPEC.

 σ, γ

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box

/ Notices