


/ Descriptions

/ Features

100V~1000V 4.0A

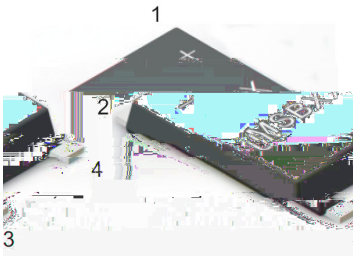

/ Marking

/ Electrical Characteristic Curve

Fig.1 Average Rectified Output Current Derating Curve

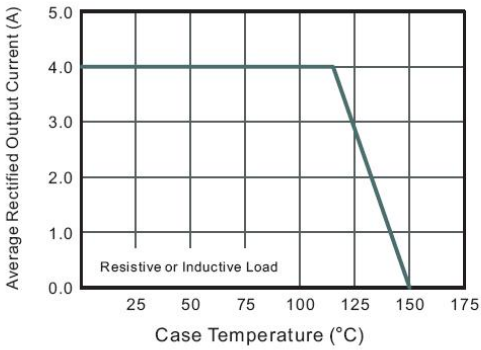


Fig.2 Typical Reverse Characteristics

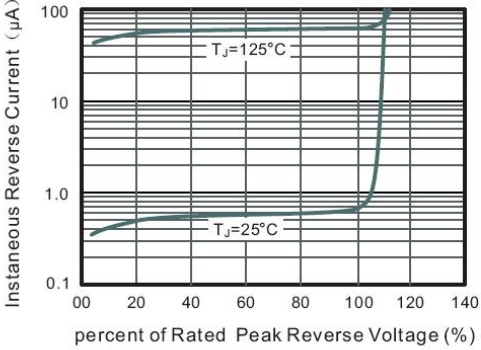


Fig.3 Typical Instantaneous Forward Characteristics




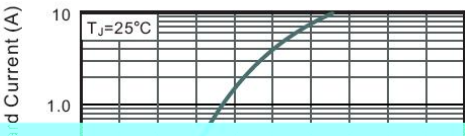


Fig.4 Typical Junction Capacitance

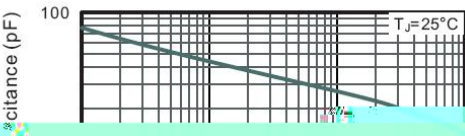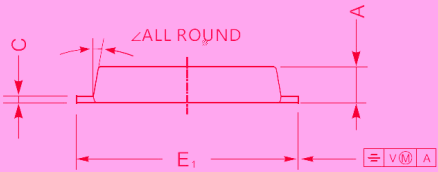

/ Package Dimensions

UMSB

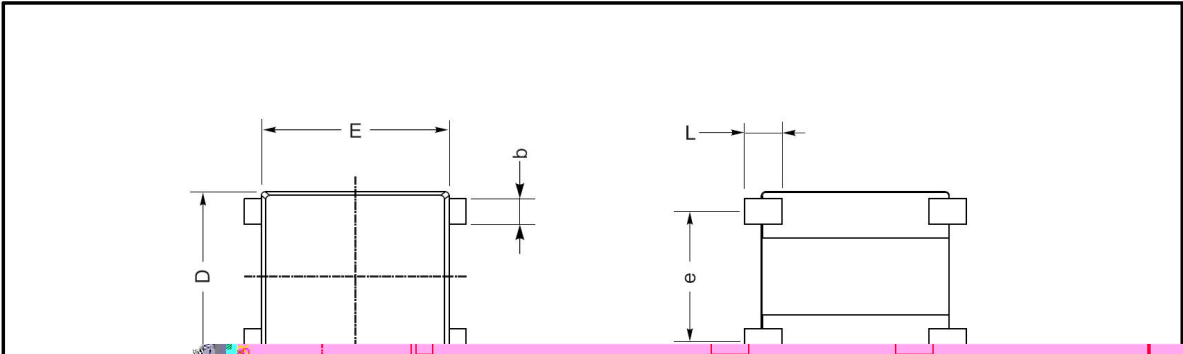


UMSB mechanical data

UNIT		A	C	D	E	E ₁	L	e	b	∠
mm		1.5	0.20	7.0	7.6	8.0	1.6			

--	--	--	--	--	--	--	--	--	--	--

/ Marking Instructions

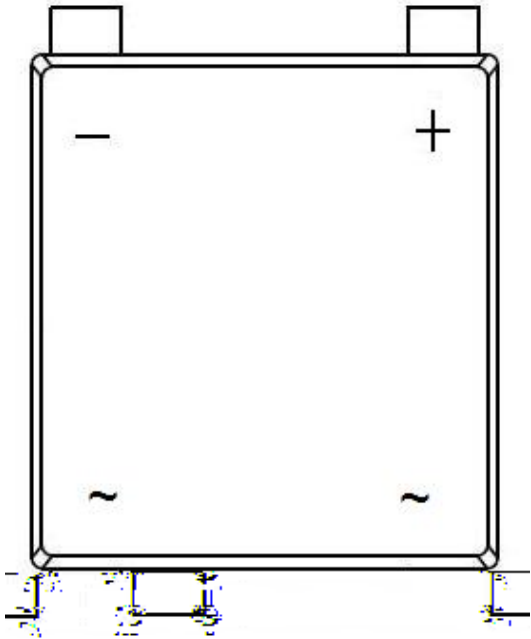

1 *

3 *

*

