

/ Descriptions


/ Features

1 1

/ Applications

DC/DC

/ Equivalent Circuit



/ Pinning




/ h_{FE} Classifications & Marking


	℃		
	℃		
	℃		

Copyright © 2014 Blue Rocket Electronics. All rights reserved.

/ Electrical Characteristic Curve

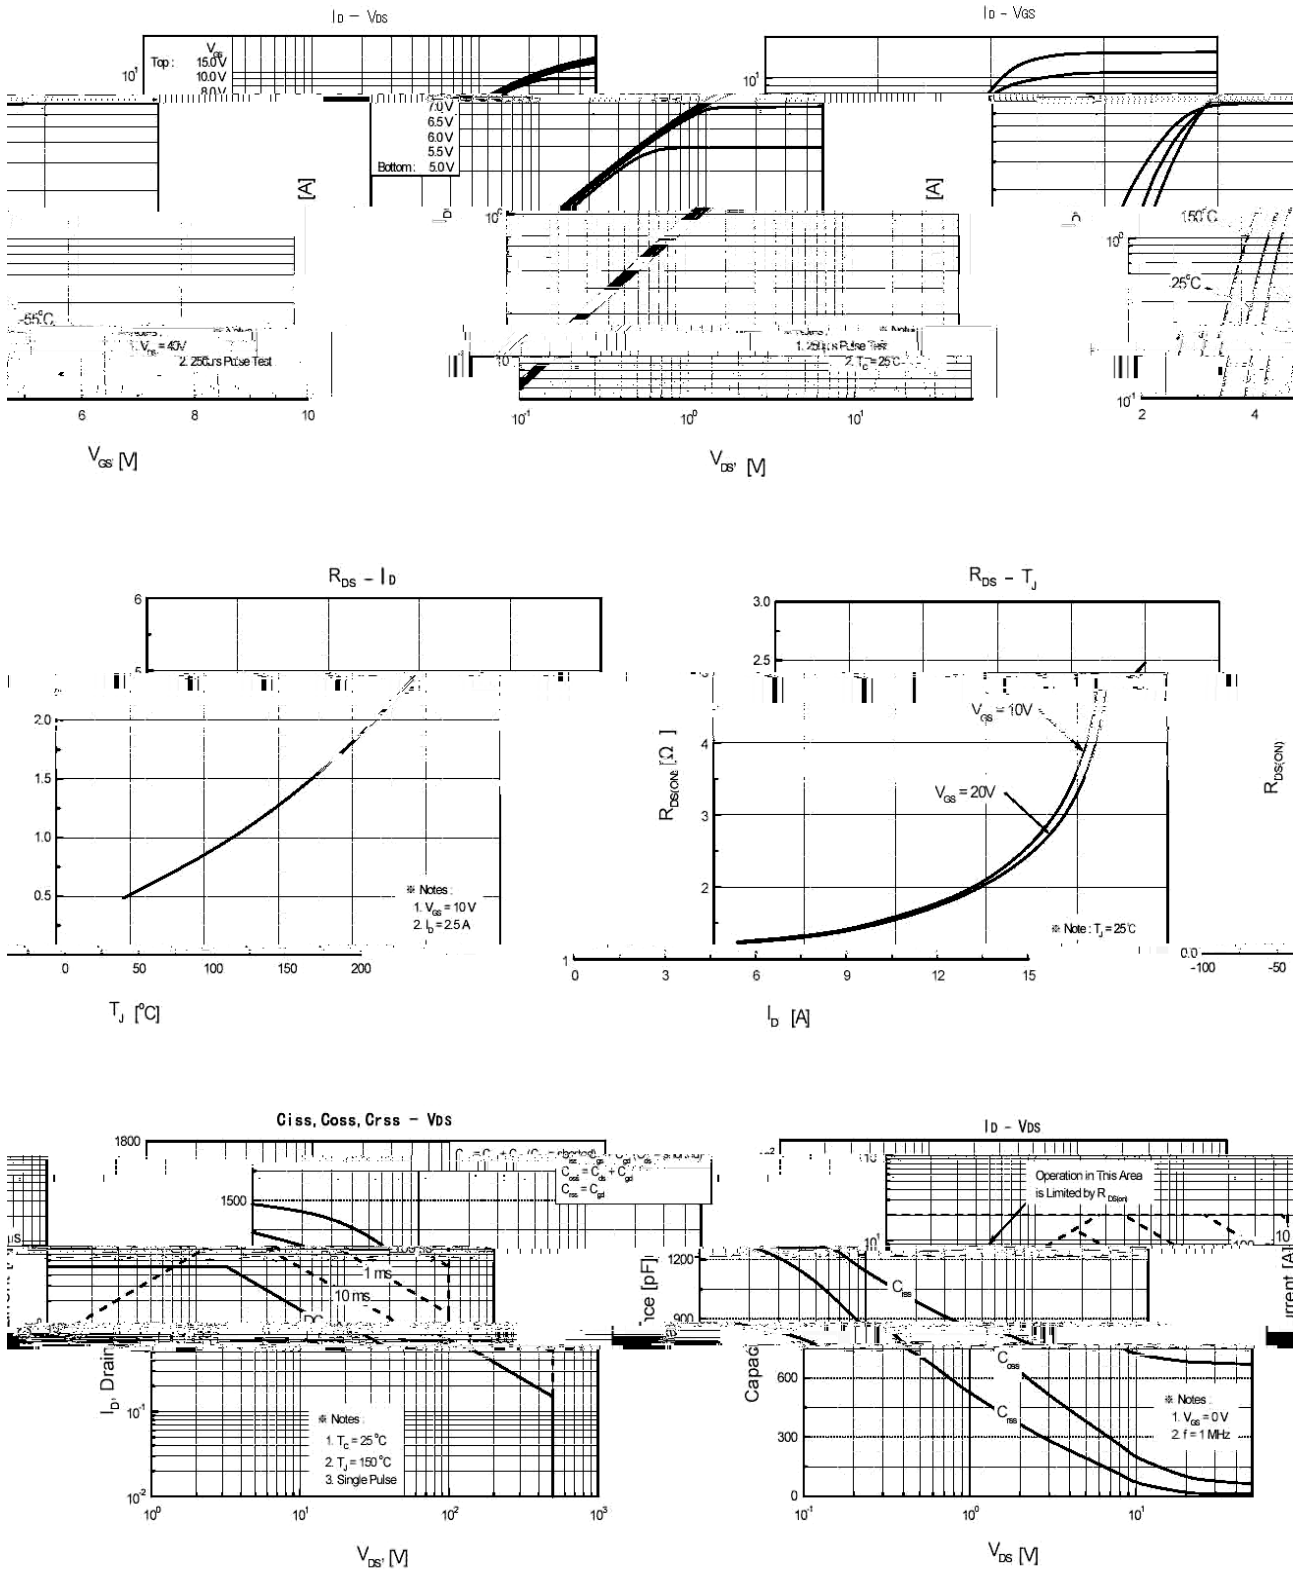

/ Package Dimensions

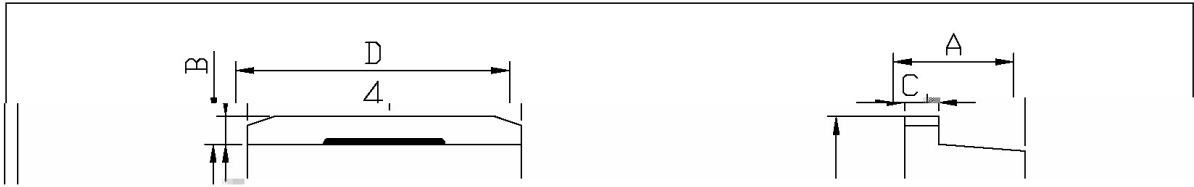


单位: mm


Dimensions In Millimeters		Symbol		Dimensions In Millimeters		Symbol	
Max		Symbol	Min	Max		Symbol	Min
9.40		A	4.30	4.70		E	9.00
2.74		B	1.00	1.40		e1	2.34
5.28		b1	0.70	0.90		e2	4.88
1.60		b2	1.15	1.35		L1	15.00
2.54		C	0.40	0.60		L2	2.24
1.60		D	1.20	1.40		L3	1.20
			9.80	10.20			

TP-263

/ Marking Instructions

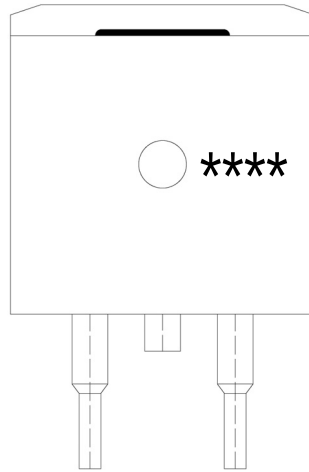

() /

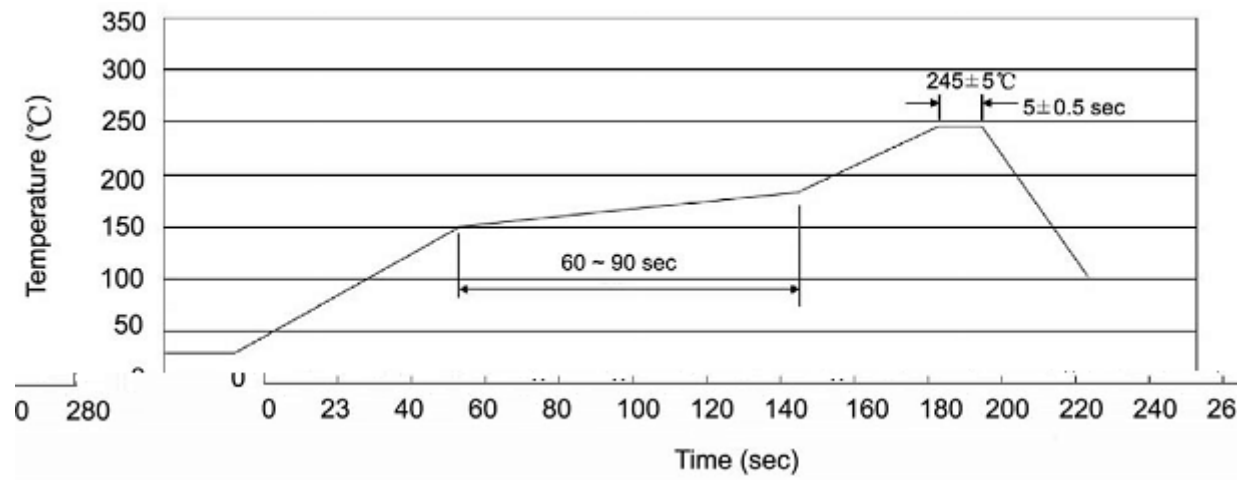

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box
TO-263	800	1	800	5	4,000	13" ×24	360×360×50	385×257×392

	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box
TO-263	50	20	1,000	5	5,000	532×33×7.0	555×164×50	575×290×180

/ Notices