

# KSB1116(A)

## / Descriptions

TO-92                  PNP


## / Features

KSD1616(A)

## / Applications

,

## / Equivalent Circuit



## / Pinning



## / hFE Classifications & Marking

|  |  |  |  |
|--|--|--|--|
|  |  |  |  |
|  |  |  |  |


/ Absolute Maximum Ratings(Ta=25 )

|  |  |  |  |  |
|--|--|--|--|--|
|  |  |  |  |  |
|  |  |  |  |  |
|  |  |  |  |  |
|  |  |  |  |  |
|  |  |  |  |  |
|  |  |  |  |  |
|  |  |  |  |  |
|  |  |  |  |  |
|  |  |  |  |  |
|  |  |  |  |  |
|  |  |  |  |  |
|  |  |  |  |  |

/ Electrical Characteristics(Ta=25 )

|  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |

## / Electrical Characteristic Curve

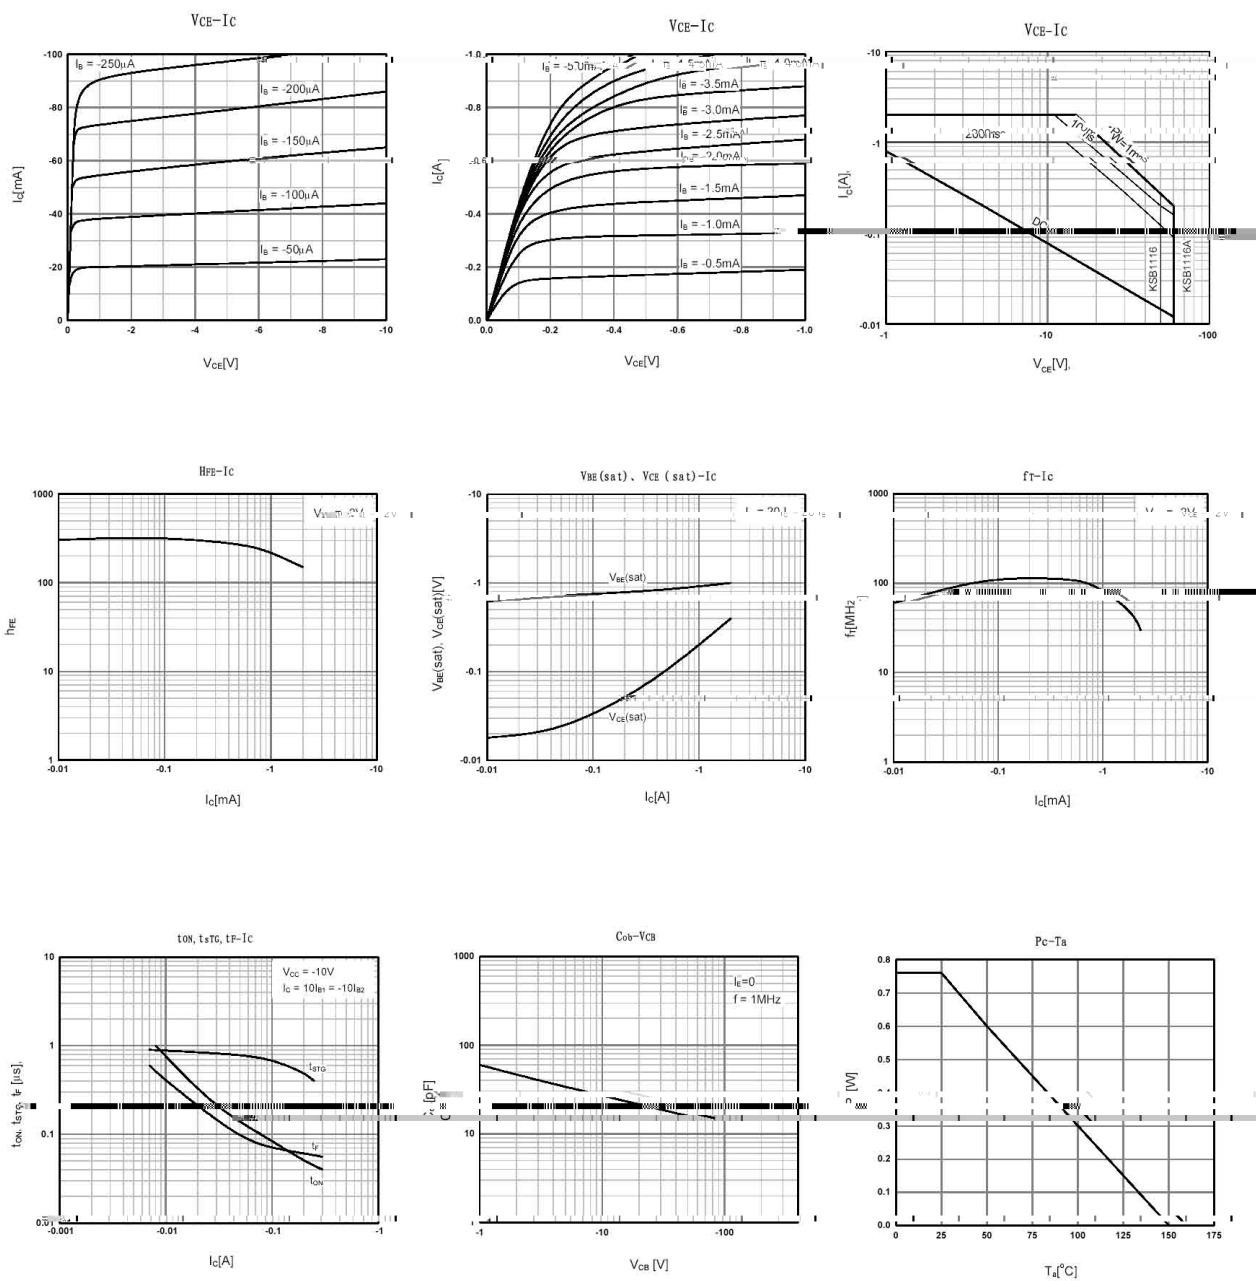


## T0-92

Unit: mm




/ Marking Instructions

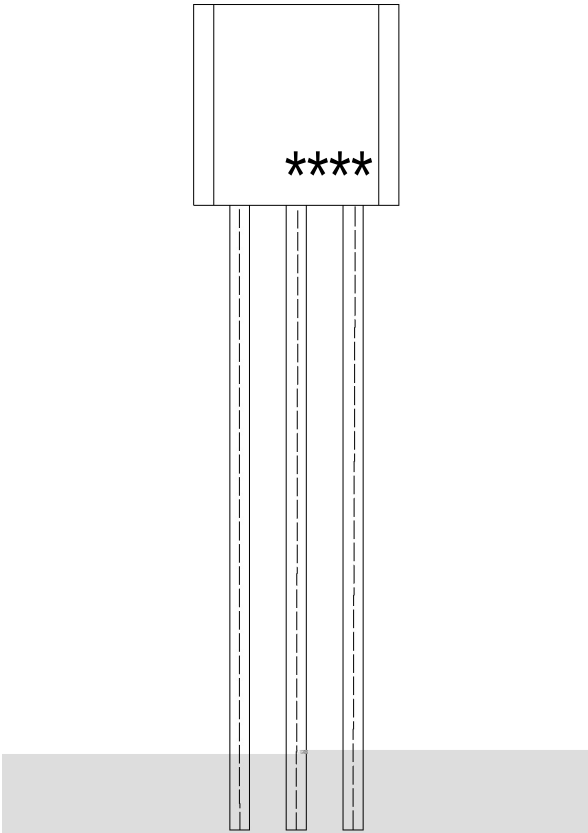

BR:  
B1116  
Y:  $h_{FE}$   
\*\*\*\*

(     ) / Temperature Profile for Dip Soldering(Pb-Free)

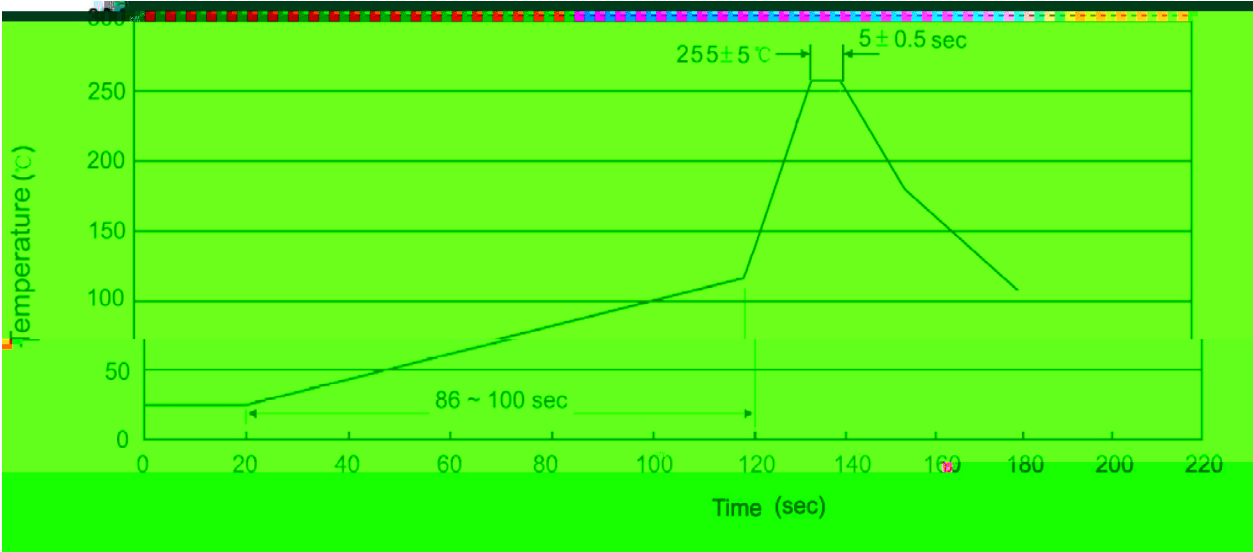

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

| 封装形式 | 包装数量             |                       |                        |                              |                        | 包装尺寸  |             |             |
|------|------------------|-----------------------|------------------------|------------------------------|------------------------|-------|-------------|-------------|
|      | Units/Bag<br>只/袋 | Bags/Inner Box<br>袋/盒 | Units/Inner Box<br>只/盒 | Inner Boxes/Outer Box<br>盒/箱 | Units/Outer Box<br>只/箱 | Bag 袋 | Inner Box 盒 | Outer Box 箱 |